

# 200CENT SQUARE 250LM FIX TRIM IP54

BATHROOM

Fix (not adjustable) 0° - 0°

□ ∅1.26" - h = 3.74"

Material : Aluminum



REF N° 200 BLACK

Black






REF N° 200 WHITE

White

## 200CENT SQUARE IP54 250LM CRI 92


2200°K	2700°K	3000°K	4000°K
REF N° 526 27 531	REF N° 526 27 931	REF N° 526 27 831	REF N° 526 27 731

3W - 250lm - 2 Step MacAdam -  
Serial wiring - □ - □  
Requires remote LED driver - 1050mA  
Narrow beam 12° - Ultra low glare (UGR < 13)

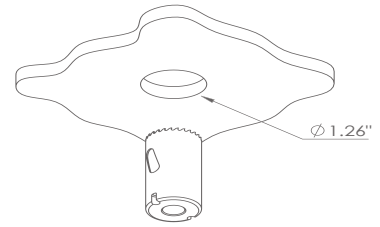

### INSTALLATION KIT

REF N° 680 01 032 standard holesaw ∅1.26"



### BEAM ANGLES

STANDARD (included) beam angle 12°


# 200CENT SQUARE 500LM FIX TRIM IP54

BATHROOM

Fix (not adjustable) 0° - 0°

□ ∅1.26" - h = 3.74"

Material : Aluminum

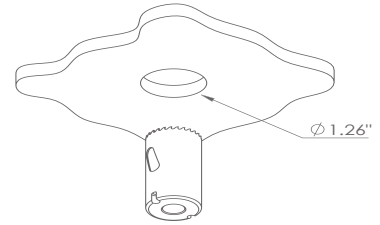

REF N° 200 BLACK

Black





REF N° 200 WHITE

White

## 200CENT SQUARE IP54 500LM CRI 92

2200°K	2700°K	3000°K	4000°K
REF N° 526 28 531	REF N° 526 28 931	REF N° 526 28 831	REF N° 526 28 731

5.9 W - 500lm - 2 Step MacAdam -  
Serial wiring - □ - □  
Requires remote LED driver - 700mA  
Perfectbeam 24° - Ultra lowglare (UGR < 13)



## INSTALLATION KIT

REF N° 680 01 032 standard holesaw ∅1.26"



## BEAM ANGLES

STANDARD (included) beam angle 24°

# 200CENT SQUARE 750LM FIX TRIM IP54

BATHROOM

Fix (not adjustable) 0° - 0°

☞ Ø1.26" - h = 3.74"

Material : Aluminum



REF N° 200 BLACK

Black



REF N° 200 WHITE

White




## 200CENT SQUARE IP54 750LM CRI 92

2400°K	2700°K	3000°K	4000°K
REF N° 526 29 531	REF N° 526 29 931	REF N° 526 29 831	REF N° 526 29 731

6.2W - 750lm - 2 Step MacAdam - Serial wiring - ☐ - ☐

Requires remote LED driver - 250mA

Standard beam angle 36°

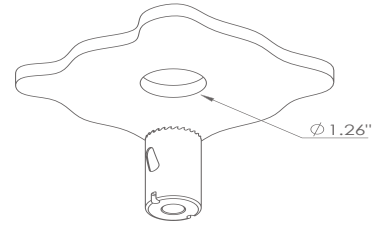

## INSTALLATION KIT

REF N° 680 01 032 standard holesaw Ø1.26"



## BEAM ANGLES

STANDARD (included) beam angle 36°

