

200CENT SERIES

FIXED RECESSED LOW TRIM


Tiny, powerful, exceptional color? It's possible with the 200Cent series. At just 1.02" (26 mm), the aperture is the same size as a 2 Euro coin, hence its name. Available in a vast array of options (fixed, adjustable, trimless, trimmed, pendant) the 200Cent series has a fixture for every application.



TECHNICAL DATA

| | |
|---------------------------|--|
| Wattage / Input | 3W (1050mA), 5.9W (700mA), 6.2W (250mA) |
| Power Supply | Remote, not included. See page 2. |
| Construction | Fixture: Aluminum |
| CCT | 2200K, 2400K (only on 6.2W version) 2700K, 3000K, 4000K |
| CRI | >92 |
| Optics | 12° (3W version) 24° (5.9W version) 36° (6.2W version) |
| Finishes | 9 Standard. See below and page 2. |
| Cut-Out Dimensions | Ø1.69" x 1.93" |
| Fixture Dimensions | Ø1.89" x 1.73" |
| Aperture | Ø1.02" |
| LED Source | 1 A+ LED |
| Color Consistency | 2-Step MacAdam |
| IP Rating | IP54 |


Ceiling Cut-Out: Ø1.69"
Fixture Dimensions

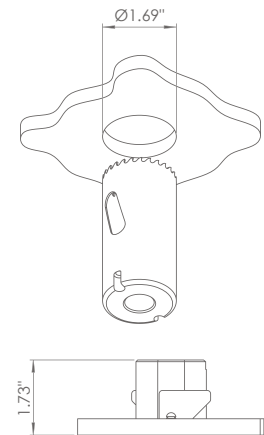

ORDERING INFORMATION

Example: 519 28 531 200 BL CO. Accessories / Power Supplies ordered separately.

| Model No. | CCT | Finish |
|-----------------------|--|--------------------------|
| 519 27 (3W - 250LM) | 531 - 2200K, 2400K (2400K for the 6.2W version) | 200 BL CR - Black-Chrome |
| 519 28 (5.9W - 500LM) | 931 - 2700K | 200 BL BL - Black-Black |
| 519 29 (6.2W - 750LM) | 831 - 3000K | 200 BL WH - Black-White |
| | 731 - 4000K | 200 BL GO - Black-Gold |
| | | 200 BL CO - Black-Copper |
| | | 200 WH BL - White-Black |
| | | 200 WH WH - White-White |
| | | 200 WH GO - White-Gold |
| | | 200 WH CO - White-Copper |

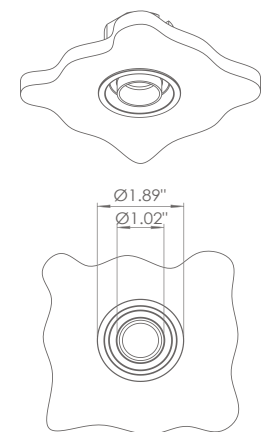

Job Name/Date:

Fixture Type Designation:

200CENT SERIES

FIXED RECESSED LOW TRIM

SUGGESTED POWER SUPPLIES

1050mA - 3W version (250LM)

| Part Number | Description | Input/Output | # of Fixtures |
|-----------------------------|------------------------------------|------------------------------------|---------------|
| PPLT00466-P | 0-10V Dimming to 1.0% | 120-277VAC to 1050mA, 10W Class 2 | 1-2 |
| PPLT00465-P | 0-10V Dimming to 1.0% | 120-277VAC to 1050mA, 20W Class 2 | 1-6 |
| PPLT00480-P | 0-10V Dimming to 1.0% | 120-277VAC to 1050mA, 30W Class 2 | 1-10 |
| PPLT00309-P | 0-10V Dimming to 1.0% | 120-277VAC to 1050mA, 50W Class 2 | 1-16 |
| PPLT00538-P | 0-10V Dimming to 0.1% (4 channels) | 120-277VAC to 1050mA, 100W Class 2 | 1-8 (1-32) |

700mA - 5.9W version (500LM)

| Part Number | Description | Input/Output | # of Fixtures |
|-----------------------------|--|-----------------------------------|---------------|
| PPLT00466-P | 0-10V Dimming to 1.0% | 120-277VAC to 700mA, 10W Class 2 | 1-1 |
| PPLT00470 | Phase Dim (120V Only) | 120-277VAC to 700mA, 14W Class 2 | 1-2 |
| PPLT00465-P | 0-10V Dimming to 1.0% | 120-277VAC to 700mA, 20W Class 2 | 1-3 |
| PPLT00261 | Leading / Trailing-Edge Dimming to 10% (120V only) | 120-277VAC to 700mA, 32W Class 2 | 3-5 |
| PPLT00467-P | 0-10V Dimming to 1.0% | 120-277VAC to 700mA, 50W Class 2 | 1-6 |
| PPLT00538-P | 0-10V Dimming to 0.1% (4 channels) | 120-277VAC to 700mA, 100W Class 2 | 1-4 (1-16) |

Lutron Compatible - 700mA - 5.9W version (500LM)

| Part Number | Option | Lutron SKU | Dim Range | Description | Input/Output | # of Fixtures |
|---------------------------|----------------|------------|-----------|---|-----------------------------------|---------------|
| PPLT00515 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv. | 120-277VAC to 700mA, 14W, Class 2 | 1-2 |
| PPLT00517 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv. | 120-277VAC to 700mA, 27W, Class 2 | 2-4 |
| PPLT00181 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or % 3-Wire LED Driv. | 120-277VAC to 700mA, 38W, Class 2 | 4-5 |

250mA - 6.2W version (750LM)

| Part Number | Description | Input/Output | # of Fixtures |
|-----------------------------|--|-----------------------------------|---------------|
| PPLT00466-P | 0-10V Dimming to 1.0% | 120-277VAC to 250mA, 10W Class 2 | 1-1 |
| PPLT00290 | Leading / Trailing Edge Dimming to 10% (120V Only) | 120-277VAC to 250mA, 16W Class 2 | 1-1 |
| PPLT00465-P | 0-10V Dimming to 1.0% | 120-277VAC to 250mA, 20W Class 2 | 1-2 |
| PPLT00467-P | 0-10V Dimming to 1.0% | 120-277VAC to 250mA, 50W Class 2 | 1-2 |
| PPLT00538-P | 0-10V Dimming to 0.1% (4 channels) | 120-277VAC to 250mA, 100W Class 2 | 1-2 (1-8) |

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

200CENT SERIES

FIXED RECESSED LOW TRIM

ACCESSORIES - Installation

PPFT00081 - Ø1.69" Holesaw



FINISHES



Job Name/Date:

Fixture Type Designation: