




INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS. READ ALL INSTRUCTIONS. IMPORTANT SAFETY INSTRUCTIONS. SAVE THESE INSTRUCTIONS.

DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION! Please read all instructions before installation.

- Keep these instructions for future reference.
- Must be installed by a qualified electrician in accordance with national and local standards. Designplan is not responsible for fixtures installed without regard to these standards.
- Unauthorized alterations or tampering of product voids warranty.
- The main power connection must be in accordance with local electrical codes.
- Suitable for INDOOR applications.
- DO NOT INSTALL INSULATION WITHIN 3.0" (76 mm) OF ANY PART OF THE LUMINAIRE.

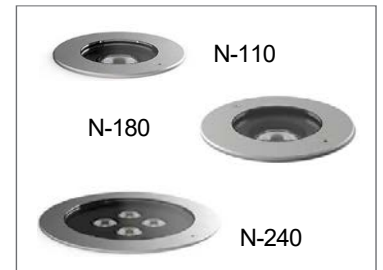

IP66 IP67

ATTENTION: For Surface - It is the contractor's responsibility to caulk around all the edges between the fixture and the mounting surface to satisfy wet label requirements.

Maintenance

Scheduled maintenance must be carried out once a year on all lighting devices, regardless of appliance class and type of use. It must include the following operations:

- Periodically clean fixtures to remove dirt from gratings and screw heads.
- Check tightness of screws on various parts of the device.
- Check that all cable glands and cables are intact and tight. Check that the glass or plastic lens is intact, and replace it if broken or damaged.
- The internal components such as the ballast, driver, washers and screws must not show clear signs of oxidation or rust. Clear traces of rust and oxidation will indicate the presence of water inside the device.
- In the case of damage, the components must be replaced by original components or spare parts.

OLY N110, N180, N240

5W, 12W/18W, 24W, 120VAC

designplan®


installation instructions

INSTALLATION AND WIRING

INSTALLAZIONE VERSIONE GU10 INSTALLATION



Disassemble device body using 2.5 mm Allen screw and 7 mm hex key

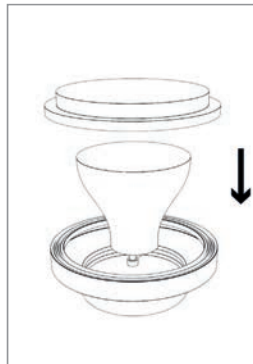

Insert the MR16 lamp into the gasket and then reinsert the




Insert bulb M16 into GU10 lamp holder, using internal bulb support




Reassemble device body by screwing through 2.5 mm Allen screw and 7 mm hex key

CASING INSTALLATION :

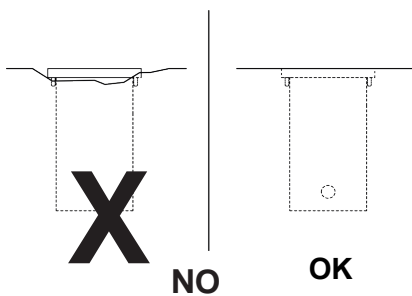


Install the casing on a flat floor

installation in concrete :




Leave under the casing 7.87"/11.8" of drainage material (do not use sand that can be compacted) proper drainage and avoid stagnant water


installation in soil :



CABLE WIRING :

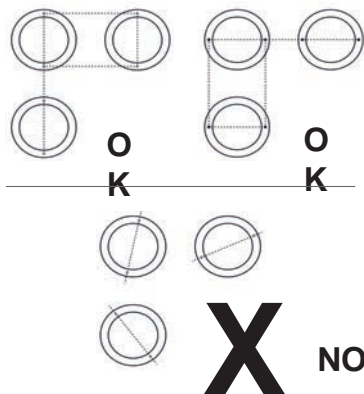


Pay attention to the direction of the holes



Cable wiring using supplied water stop connector

Suggested cable cross-section - up to 2 x 18 AWG Cable external diameter min. - max. 0.189" - 0.236" Dia.

DEVICE INSTALLATION :

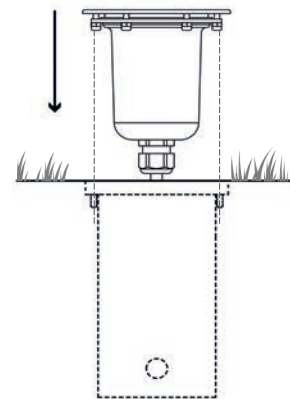

Aligning and installing the device in the casing