



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS. READ ALL INSTRUCTIONS. IMPORTANT SAFETY INSTRUCTIONS. SAVE THESE INSTRUCTIONS.

DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION!

Please read all instructions before installation.

- Keep these instructions for future reference.
- Must be installed by a qualified electrician in accordance with national and local standards. Designplan is not responsible for fixtures installed without regard to these standards.
- Unauthorized alterations or tampering of product voids warranty.
- The main power connection must be in accordance with local electrical codes.
- Suitable for OUTDOOR applications.



IP65 IK08

ATTENTION: For Wall/Ceiling - It is the contractor's responsibility to caulk around all the edges between the fixture and the mounting surface to satisfy wet label requirements.

For In-Grade - It is the contractor's responsibility to seal the conduit with "Great Stuff" aerosol seal that prevents water and moisture penetration for ultimate protection.

Contractor **MUST** use gel-filled wire nuts.


Maintenance

Scheduled maintenance must be carried out once a year on all lighting devices, regardless of appliance class and type of use. It must include the following operations:


- Periodically clean fixtures to remove dirt from gratings and screw heads.
- Check tightness of screws on various parts of the device.
- Check that all cable glands and cables are intact and tight. Check that the glass or plastic lens is intact, and replace it if broken or damaged.
- The internal components such as the ballast, driver, washers and screws must not show clear signs of oxidation or rust. Clear traces of rust and oxidation will indicate the presence of water inside the device.
- In the case of damage, the components must be replaced by original components or spare parts.

Recommendations



- 1) Verify that the equipment used to connect our devices all the guarantees required under law
- 2) Use cables, connectors and quality materials for electrical wiring
- 3) Products with IP67/68 degree make the wiring / connections with accessories provide the same degree IP of the selected product (available in the catalog);
- 4) In the case of installations outside it is not recommended to install the power supplies in the formwork and / or in the junction box without adequate protection



- Use gel-filled waterproof wire-nuts for wire connections.

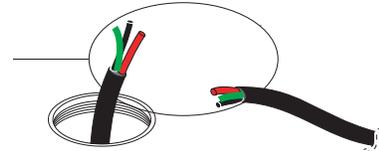

-REMOVE THE BRACKET, UNSCREWING THE TWO EXTERNAL SCREWS
- DRILL HOLE IN THE WALL BY ENTERING THE CORRECTED FIXING PLUGS. ATTACH THE BRACKET AND MAKING THE ELECTRICAL CONNECTION.
- APPLY THE LAMP BRACKET. Tightening the two outer screws.
- PLACE THE LAMP IN THE PREFERRED WAY

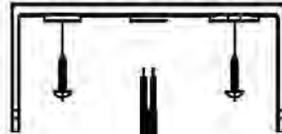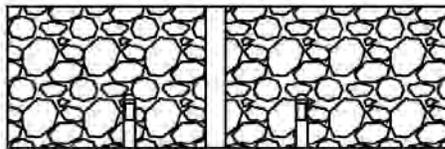

TO OPEN THE LUMINAIRE UNSCREW THE 4 SCREWS OF THE COVER. CONNECT THE RIGHT BULB FOLLOWING ITS INSTALLATION INSTRUCTIONS. CLOSE THE UNIT TAKING CARE TO PLACE IN THE RIGHT WAY THE SILICONE GASKET SEALING

