

# 200CENT ROUND 250LM LOW TRIM IP54

BATHROOM





Fix (not adjustable) 0° - 0°

☞ Ø1.69" - h = 1.93"

Material : Aluminum



200CENT ROUND LOW IP54 TRIM 250LM CRI 92			
2200°K	2700°K	3000°K	4000°K
REF N° 519 27 531	REF N° 519 27 931	REF N° 519 27 831	REF N° 519 27 731
3W - 250LM - 2 Step MacAdam - Serial wiring - ☐ - ☐ Requires remote LED driver - 1050mA Narrowbeam 12°-Ultralowglare (UGR<13)			

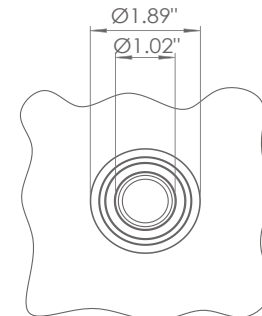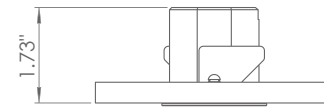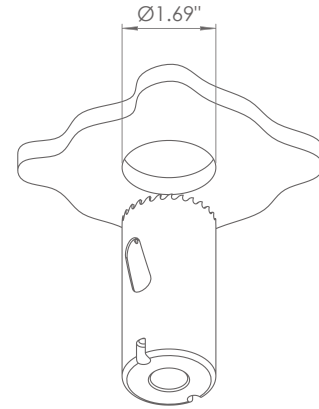

## INSTALLATION KIT

REF N° 680 01 043 standard holesaw Ø1.69"

## BEAM ANGLES

STANDARD (included) beam angle 12°

# 200CENT ROUND 500LM LOW TRIM IP54

BATHROOM

Fix (not adjustable) 0° - 0°

□ ∅1.69" - h = 1.93"

Material : Aluminum



## 200CENT ROUND LOW IP54 TRIM 500LM CRI 92




2200°K	2700°K	3000°K	4000°K
REF N° 519 28 531	REF N° 519 28 931	REF N° 519 28 831	REF N° 519 28 731

5.9W - 500LM - 2 Step MacAdam -

Serial wiring - □ - □

Requires remote LED driver - 700mA

Perfect beam 24° - Ultra low glare (UGR < 13)

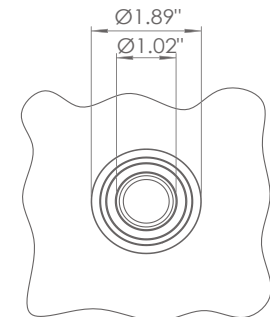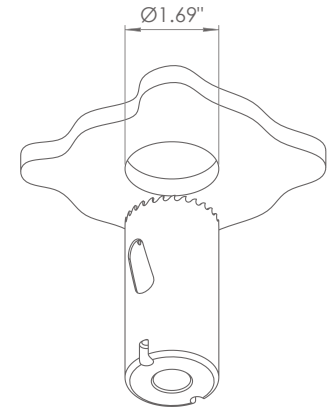

### INSTALLATION KIT

REF N° 680 01 043 standard holesaw ∅1.69"

### BEAM ANGLES

STANDARD (included) beam angle 24°

# 200CENT ROUND 750LM LOW TRIM IP54

BATHROOM

Fix (not adjustable) 0° - 0°

☞ Ø1.69" - h = 1.93"




Material : Aluminum



## 200CENT ROUND LOW IP54 TRIM 750LM CRI 92

2400°K	2700°K	3000°K	4000°K
REF N° 519 29 531	REF N° 519 29 931	REF N° 519 29 831	REF N° 519 29 731

6.2W - 750LM - 2 Step MacAdam -  
Serial wiring - ☐ - ☐  
Requires remote LED driver - 250mA  
Standard beam angle 36°

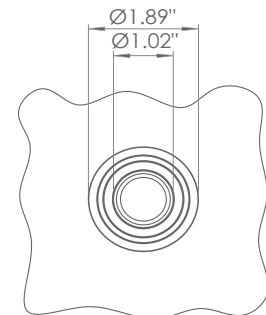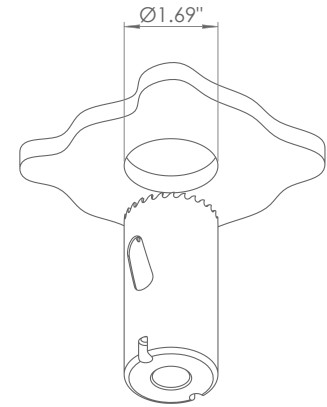

### INSTALLATION KIT

REF N° 680 01 043 standard holesaw Ø1.69"

### BEAM ANGLES

STANDARD (included) beam angle 36°

