

# 200CENT ROUND 2 X 250LM TWIN FIX TRIMLESS IP20

INDOOR

Fix (not adjustable) 0° - 0°  
 □ 4.49" x 9.61" - h = 3.54"  
 Material : CALCYT® plaster



REF N° 200 BLACK

Black




REF N° 200 WHITE

White



REF N° 200 CHROME

Chrome



REF N° 200 GOLD

Gold





REF N° 200 COPPER

Copper

## 200CENT ROUND TWIN IP20 2 X 250LM CRI 92

2200°K	2700°K	3000°K	4000°K
REF N° 514 27 530	REF N° 514 27 930	REF N° 514 27 830	REF N° 514 27 730

2 X 3W - 2 X 250LM - 2 Step MacAdam -  
 Serial wiring - □ - ■  
 Requires remote LED driver - 1050mA  
 Narrow beam 12° - Ultra low glare (UGR < 13)

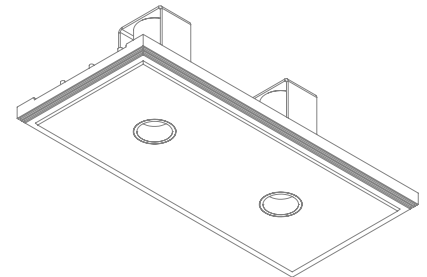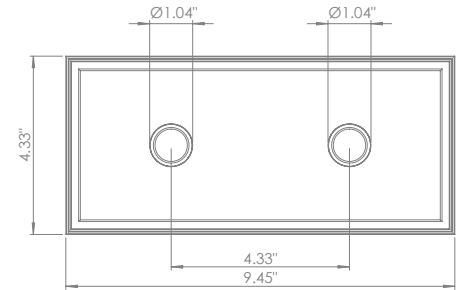

### INSTALLATION KIT


**STANDARD** (included) installation system for ceiling 0.35" - 0.47" - 0.59"  
**REF N° 200 99 025** installation system for gypsum ceiling 0.98"  
**REF N° 200 99 030** installation system for gypsum ceiling 1.18"

### BEAM ANGLES

**STANDARD** (included) beam angle 12°

# 200CENT ROUND 2 X 500LM TWIN FIX TRIMLESS IP20

INDOOR

Fix (not adjustable) 0° - 0°  
 4.49" x 9.61" - h = 3.54"  
 Material : CALCYT® plaster



REF N° 200 BLACK

Black




REF N° 200 WHITE

White



REF N° 200 CHROME

Chrome



REF N° 200 GOLD

Gold








REF N° 200 COPPER

Copper

## 200CENT ROUND TWIN IP20 2 X 500LM CRI 92

2200°K	2700°K	3000°K	4000°K
REF N° 514 28 530	REF N° 514 28 930	REF N° 514 28 830	REF N° 514 28 730

2 X 5.9W - 2 X 500LM - 2 Step MacAdam -  
 Serial wiring -  -   
 Requires remote LED driver - 700mA  
 Perfect beam 24° - Ultra low glare (UGR < 13)

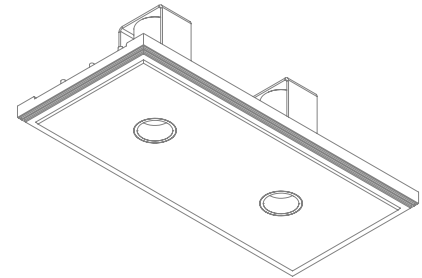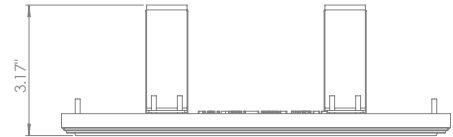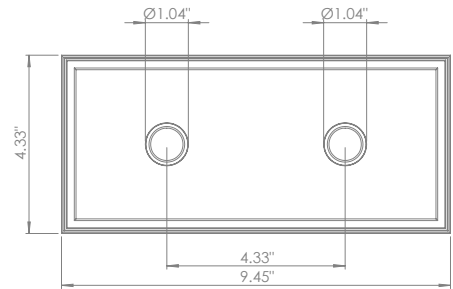

## INSTALLATION KIT


- STANDARD** (included) installation system for ceiling 0.35" - 0.47" - 0.59"
- REF N° 200 99 025 installation system for gypsum ceiling 0.98"
- REF N° 200 99 030 installation system for gypsum ceiling 1.18"

## BEAM ANGLES

- STANDARD** (included) beam angle 24°

# 200CENT ROUND 2 X 750LM TWIN FIX TRIMLESS IP20

INDOOR

Fix (not adjustable) 0° - 0°  
 4.49" x 9.61" - h = 3.54"  
 Material : CALCYT® plaster



REF N° 200 BLACK

Black



REF N° 200 WHITE

White



REF N° 200 CHROME

Chrome



REF N° 200 GOLD

Gold







REF N° 200 COPPER

Copper

## 200CENT ROUND TWIN IP20 2 X 750LM CRI 92

2400°K	2700°K	3000°K	4000°K
REF N° 514 29 530	REF N° 514 29 930	REF N° 514 29 830	REF N° 514 29 730

2 x 6.2W - 2 x 750LM - 2 Step MacAdam -  
 Serial wiring -  -   
 Requires remote LED driver - 250mA  
 Standard beam angle 36°

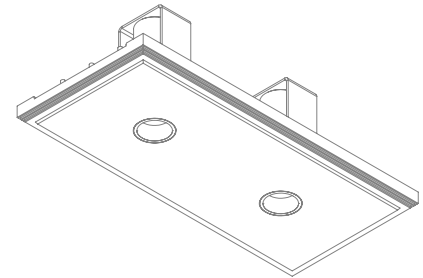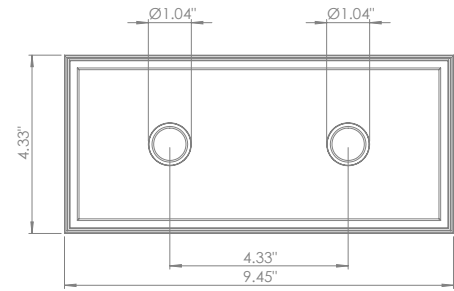

## INSTALLATION KIT

**STANDARD** (included) installation system for ceiling 0.35" - 0.47" - 0.59"  
**REF N° 200 99 025** installation system for gypsum ceiling 0.98"  
**REF N° 200 99 030** installation system for gypsum ceiling 1.18"

## BEAM ANGLES

**STANDARD** (included) beam angle 36°

