



200CENT SQUARE 2 X 750LM TWIN FIX TRIMLESS IP20

INDOOR

Fix (not adjustable) 0° - 0°
 4.49" x 9.61" - h = 3.54"

Material : CALCYT® plaster

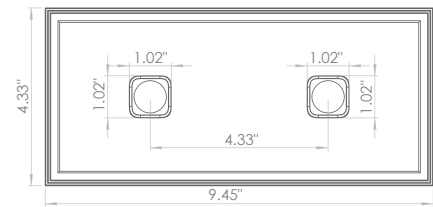

REF N° 200 BLACK

Black







REF N° 200 WHITE

White

200CENT SQUARE TWIN IP20 2 X 750LM CRI 92

2400°K	2700°K	3000°K	4000°K
REF N° 525 29 530	REF N° 525 29 930	REF N° 525 29 830	REF N° 525 29 730

2 x 6.2 W - 2 x 750lm - 2 Step MacAdam -
 Serial wiring -  - 
 Requires remote LED driver - 250mA
 Standard beam angle 36°

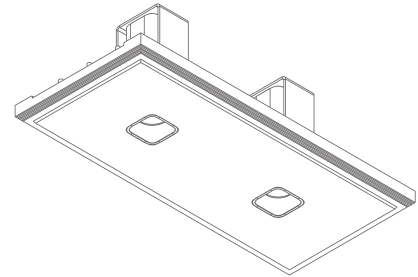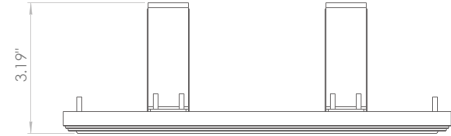


INSTALLATION KIT

STANDARD (included) installation system for ceiling 0.35" - 0.47" - 0.59"

REF N° 200 99 025 installation system for gypsum ceiling 0.98"

REF N° 200 99 030 installation system for gypsum ceiling 1.18"

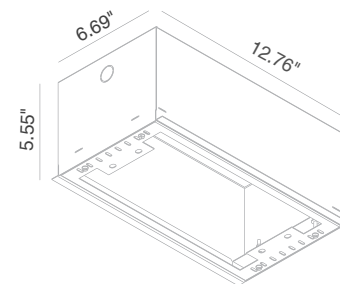

BEAM ANGLES

STANDARD (included) beam angle 36°


200CENT SQUARE 2 X 500LM TWIN FIX TRIMLESS IP20

INDOOR

Fix (not adjustable) 0° - 0°

4.49" x 9.61" - h = 3.54"

Material : CALCYT® plaster

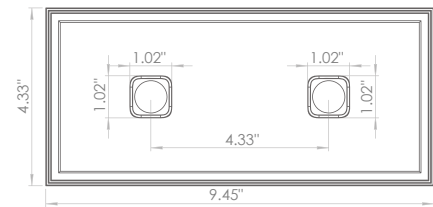

REF N° 200 BLACK

Black







REF N° 200 WHITE

White

200CENT SQUARE TWIN IP20 2 X 500LM CRI 92

2200°K	2700°K	3000°K	4000°K
REF N° 525 28 530	REF N° 525 28 930	REF N° 525 28 830	REF N° 525 28 730

2 X 5.9W - 2 X 500lm - 2 Step MacAdam -
Serial wiring -  - 
Requires remote LED driver - 700mA
Perfect beam 24° - Ultra low glare (UGR < 13)

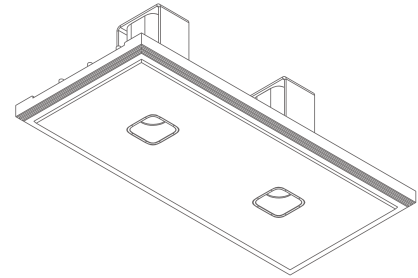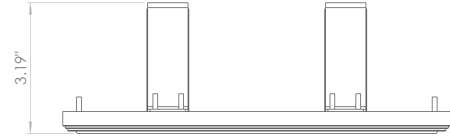


INSTALLATION KIT

STANDARD (included) installation system for ceiling 0.35" - 0.47" - 0.59"

REF N° 200 99 025 installation system for gypsum ceiling 0.98"

REF N° 200 99 030 installation system for gypsum ceiling 1.18"

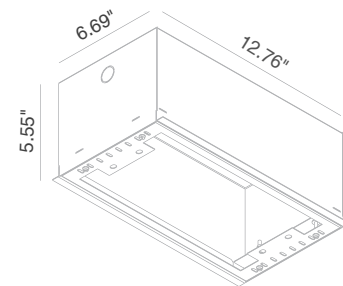


BEAM ANGLES


STANDARD (included) beam angle 24°

200CENT SQUARE 2 X 250LM TWIN FIX TRIMLESS IP20

INDOOR

Fix (not adjustable) 0° - 0°
 4.49" x 9.61" - h = 3.54"

Material : CALCYT® plaster

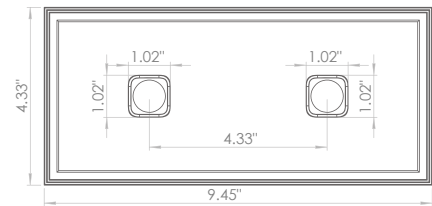

REF N° 200 BLACK

Black




REF N° 200 WHITE

White



200CENT SQUARE TWIN IP20 2 X 250LM CRI 92

2200°K	2700°K	3000°K	4000°K
REF N° 525 27 530	REF N° 525 27 930	REF N° 525 27 830	REF N° 525 27 730

2 X 3W - 2 X 250lm - 2 Step MacAdam -

Serial wiring -  - 

Requires remote LED driver - 1050mA
 Narrow beam 12° - Ultra low glare (UGR < 13)

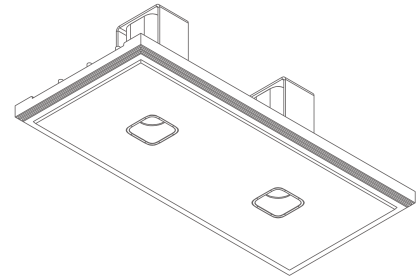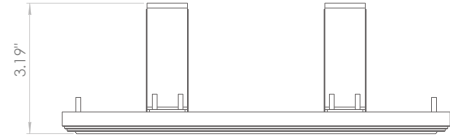


INSTALLATION KIT

STANDARD (included) installation system for ceiling 0.35" - 0.47" - 0.59"

REF N° 200 99 025 installation system for gypsum ceiling 0.98"

REF N° 200 99 030 installation system for gypsum ceiling 1.18"

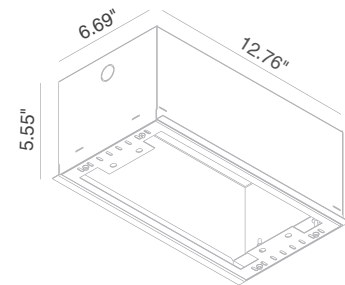

BEAM ANGLES

STANDARD (included) beam angle 12°

