

# 200CENT ROUND 250LM SWING 30 XL TRIMLESS IP20

INDOOR

Adjustable 0° - 27°

4.49" x 5.28" - h = 2.76"

Material : CALCYT® plaster



REF N° 200 BL CR  
Black - Chrome



REF N° 200 BL BL  
Black - Black



REF N° 200 WH BL  
White - Black



REF N° 200 BL WH  
Black - White



REF N° 200 WH WH  
White - White



REF N° 200 BL GO  
Black - Gold



REF N° 200 WH GO  
White - Gold




REF N° 200 BL CO  
Black - Copper



REF N° 200 WH CO  
White - Copper

200CENT ROUND SWING 30 XL 250LM CRI 92			
2200°K	2700°K	3000°K	4000°K
REF N° 552 27 530	REF N° 552 27 930	REF N° 552 27 830	REF N° 552 27 730
3W - 250LM - 2-Step MacAdam - Serial wiring - □ - ▽ Requires remote LED driver - 1050mA Narrowbeam 12° - Ultra low glare (UGR < 13)			

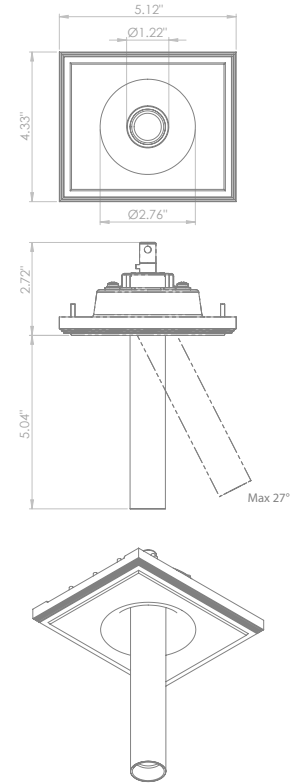

## INSTALLATION KIT

**STANDARD** (included) installation system for ceiling 0.35" - 0.47" - 0.59"

**REF N° 200 99 025** installation system for gypsum ceiling 0.98"

**REF N° 200 99 030** installation system for gypsum ceiling 1.18"

## BEAM ANGLES

**STANDARD** (included) beam angle 12°


# 200CENT ROUND 500LM SWING 30 XL TRIMLESS IP20

INDOOR

Adjustable 0° - 27°

4.49" x 5.28" - h = 2.76"

Material : CALCYT® plaster

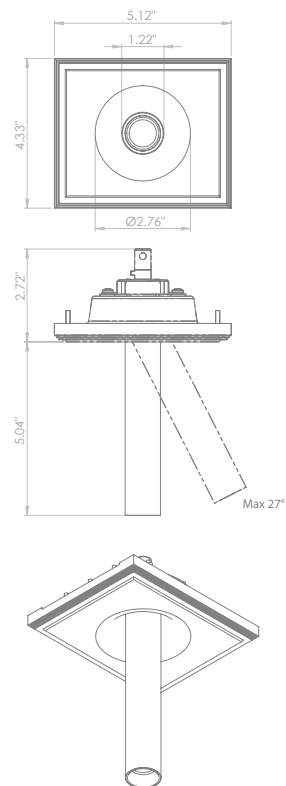

REF N° 200 BL CR  
Black - Chrome



REF N° 200 BL BL  
Black - Black



REF N° 200 WH BL  
White - Black



REF N° 200 BL WH  
Black - White



REF N° 200 WH WH  
White - White



REF N° 200 BL GO  
Black - Gold



REF N° 200 WH GO  
White - Gold



REF N° 200 BL CO  
Black - Copper



REF N° 200 WH CO  
White - Copper

200CENT ROUND SWING 30 XL 500LM CRI 92			
2200°K	2700°K	3000°K	4000°K
REF N° 552 28 530	REF N° 552 28 930	REF N° 552 28 830	REF N° 552 28 730
5.9W - 500LM - 2-Step MacAdam - Serial wiring -  - Requires remote LED driver - 700mA Perfect beam 24° - Ultra low glare (UGR < 13)			

## INSTALLATION KIT

STANDARD (included) installation system for ceiling 0.35" - 0.47" - 0.59"

REF N° 200 99 025 installation system for gypsum ceiling 0.98"

REF N° 200 99 030 installation system for gypsum ceiling 1.18"

## BEAM ANGLES

STANDARD (included) beam angle 24°

# 200CENT ROUND 750LM SWING 30 XL TRIMLESS IP20

INDOOR

Adjustable 0° - 27°

4.49" x 5.28" - h = 2.76"

Material : CALCYT® plaster



REF N° 200 BL CR  
Black - Chrome



REF N° 200 BL BL  
Black - Black



REF N° 200 WH BL  
White - Black



REF N° 200 BL WH  
Black - White



REF N° 200 WH WH  
White - White



REF N° 200 BL GO  
Black - Gold



REF N° 200 WH GO  
White - Gold





REF N° 200 BL CO  
Black - Copper



REF N° 200 WH CO  
White - Copper

200CENT ROUND SWING 30 XL 750LM CRI 92			
2400°K	2700°K	3000°K	4000°K
REF N° 552 29 530	REF N° 552 29 930	REF N° 552 29 830	REF N° 552 29 730

6.2 W - 750LM - 2-Step MacAdam -  
Serial wiring - -   
Requires remote LED driver - 250mA  
Standard beam angle 36°

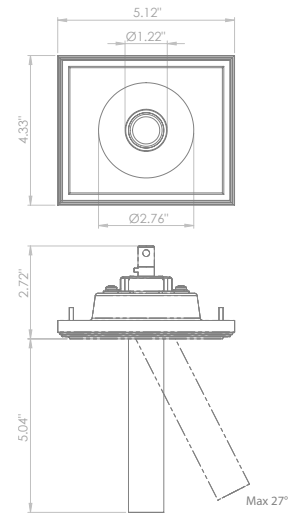

## INSTALLATION KIT

**STANDARD** (included) installation system for ceiling 0.35" - 0.47" - 0.59"

REF N° 200 99 025 installation system for gypsum ceiling 0.98"

REF N° 200 99 030 installation system for gypsum ceiling 1.18"

## BEAM ANGLES

**STANDARD** (included) beam angle 36°

