


200CENT ROUND 2 X 750LM TWIN ADJ TRIMLESS IP20

INDOOR

Adjustable 0° - 25°


4.49" x 9.61" - h = 3.94"


Material : CALCYT® plaster

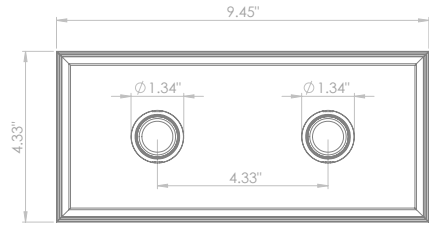

200CENT ROUND TWIN ADJ 2 X 750LM CRI 92

2400°K	2700°K	3000°K	4000°K
REF N° 532 29 530	REF N° 532 29 930	REF N° 532 29 830	REF N° 532 29 730

2 x 6.2 W - 2 x 750LM - 2-Step MacAdam -
Serial wiring - 
Requires remote LED driver - 250mA
Standard beam angle 36°

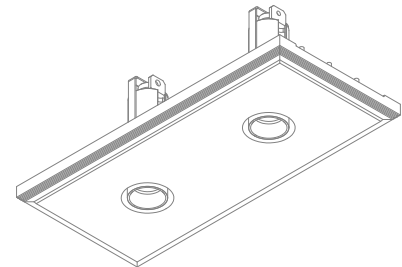


INSTALLATION KIT

STANDARD (included) installation system for ceiling 0.35" - 0.47" - 0.59"

REF N° 200 99 025 installation system for gypsum ceiling 0.98"

REF N° 200 99 030 installation system for gypsum ceiling 1.18"

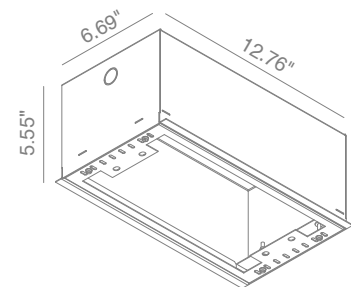

BEAM ANGLES

STANDARD (included) beam angle 36°

200CENT ROUND 2 X 500LM TWIN ADJ TRIMLESS IP20

INDOOR

Adjustable 0° - 25°

4.49" x 9.61" - h = 3.94"

Material : CALCYT® plaster

REF N° 200 BL CR



Black - Chrome

REF N° 200 BL BL



Black - Black

REF N° 200 WH BL



White - Black

REF N° 200 BL WH



Black - White

REF N° 200 WH WH



White - White

REF N° 200 BL GO



Black - Gold

REF N° 200 WH GO



White - Gold

REF N° 200 BL CO



Black - Copper


REF N° 200 WH CO






White - Copper

200CENT ROUND TWIN ADJ 2 X 500LM CRI 92

2200°K	2700°K	3000°K	4000°K
REF N° 532 28 530	REF N° 532 28 930	REF N° 532 28 830	REF N° 532 28 730

2 X 5.9W - 2 X 500LM - 2-Step MacAdam -
Serial wiring - 
Requires remote LED driver - 700mA
Perfect beam 24° - Ultra low glare (UGR < 13)

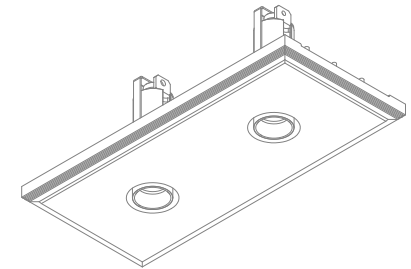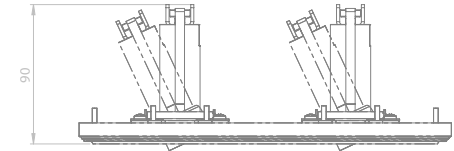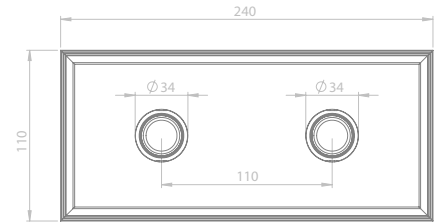


INSTALLATION KIT

STANDARD (included) installation system for ceiling 0.35" - 0.47" - 0.59"

REF N° 200 99 025 installation system for gypsum ceiling 0.98"

REF N° 200 99 030 installation system for gypsum ceiling 1.18"



BEAM ANGLES

STANDARD (included) beam angle 24°




200CENT ROUND 2 X 250LM TWIN ADJ TRIMLESS IP20

INDOOR

Adjustable 0° - 25°

4.49" x 9.61" - h = 3.94"

Material : CALCYT® plaster

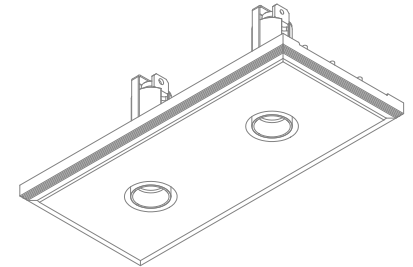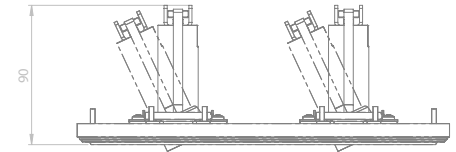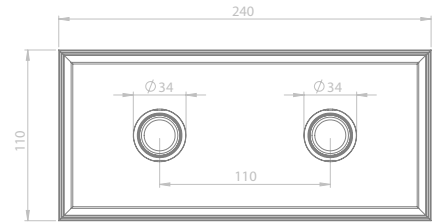

REF N° 200 BL CR



Black - Chrome

REF N° 200 BL BL



Black - Black

REF N° 200 WH BL



White - Black

REF N° 200 BL WH



Black - White

REF N° 200 WH WH



White - White

REF N° 200 BL GO



Black - Gold

REF N° 200 WH GO



White - Gold

REF N° 200 BL CO



Black - Copper

REF N° 200 WH CO



White - Copper

200CENT ROUND TWIN ADJ 2 X 250LM CRI 92

2200°K	2700°K	3000°K	4000°K
REF N° 532 27 530	REF N° 532 27 930	REF N° 532 27 830	REF N° 532 27 730

2 X 3W - 2 X 250LM - 2-Step MacAdam -

Serial wiring - 

Requires remote LED driver - 1050mA


Narrow beam 12° - Ultra low glare (UGR < 13)

INSTALLATION KIT

STANDARD (included) installation system for ceiling 0.35" - 0.47" - 0.59"

REF N° 200 99 025 installation system for gypsum ceiling 0.98"

REF N° 200 99 030 installation system for gypsum ceiling 1.18"



BEAM ANGLES

STANDARD (included) beam angle 12°

