

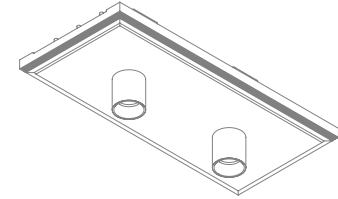
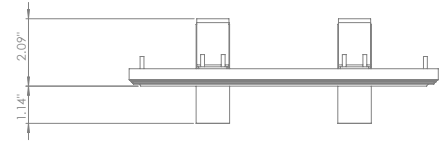


200CENT ROUND 2 X 500LM TWIN SEMI TRIMLESS IP20

INDOOR

Fix (not adjustable) 0° - 0°
 4.49" x 9.61" - h = 2.56"
 Material : CALCYT® plaster

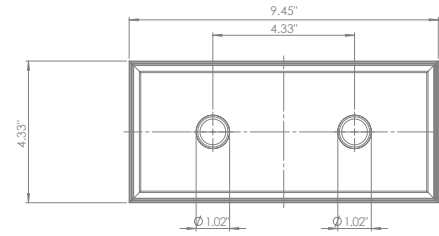

Black - Chrome

200CENT ROUND TWIN IP20 2 X 500LM CRI 92			
2200°K	2700°K	3000°K	4000°K
REF N° 514 18 520	REF N° 514 18 920	REF N° 514 18 820	REF N° 514 18 720
2 X 5.9W - 2 X 500LM - 2-Step MacAdam - Serial wiring -  Requires remote LED driver - 700mA Perfect beam 24° - Ultra low glare (UGR < 13)			



Black - Black



White - Black



Black - White



White - White



Black - Gold



White - Gold




Black - Copper



White - Copper

INSTALLATION KIT

STANDARD (included) installation system for ceiling 0.35" - 0.47" - 0.59"
REF N° 200 99 025 installation system for gypsum ceiling 0.98"
REF N° 200 99 030 installation system for gypsum ceiling 1.18"

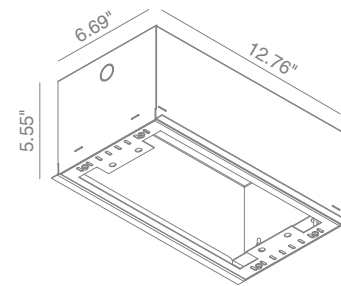


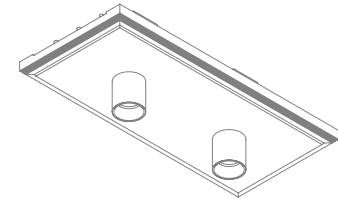
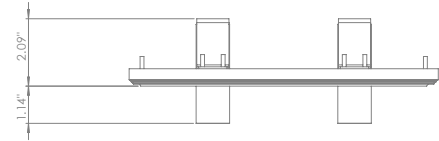
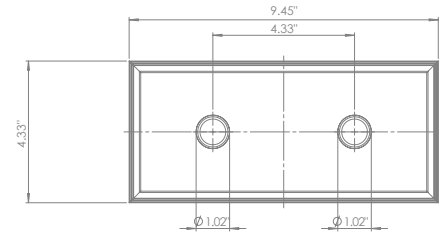
BEAM ANGLES

STANDARD (included) beam angle 24°

200CENT ROUND 2 X 250LM TWIN SEMI TRIMLESS IP20

INDOOR


Fix (not adjustable) 0° - 0°
 4.49" x 9.61" - h = 2.56"
 Material : CALCYT® plaster



Black - Chrome

200CENT ROUND TWIN IP20 2 X 250LM CRI 92

2200°K	2700°K	3000°K	4000°K
REF N° 514 17 520	REF N° 514 17 920	REF N° 514 17 820	REF N° 514 17 720

2 X 3W - 2 X 250LM - 2-Step MacAdam -
 Serial wiring - 
 Requires remote LED driver - 1050mA
 Narrow beam 12° - Ultra low glare (UGR < 13)



Black - Black



White - Black



Black - White



White - White



Black - Gold



White - Gold




Black - Copper



White - Copper

INSTALLATION KIT

STANDARD (included) installation system for ceiling 0.35" - 0.47" - 0.59"
REF N° 200 99 025 installation system for gypsum ceiling 0.98"
REF N° 200 99 030 installation system for gypsum ceiling 1.18"

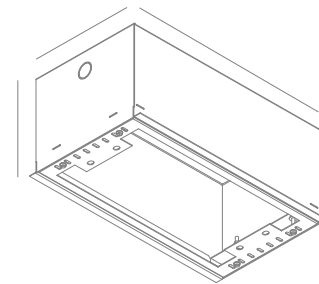

BEAM ANGLES

STANDARD (included) beam angle 12°

200CENT ROUND 2 X 750LM TWIN SEMI TRIMLESS IP20

INDOOR

Fix (not adjustable) 0° - 0°

□ 4.49" x 9.61" - h = 2.56"

Material : CALCYT® plaster

REF N° 200 BL CR



Black - Chrome

REF N° 200 BL BL



Black - Black

REF N° 200 WH BL



White - Black

REF N° 200 BL WH



Black - White

REF N° 200 WH WH



White - White

REF N° 200 BL GO



Black - Gold

REF N° 200 WH GO



White - Gold

REF N° 200 BL CO



Black - Copper

REF N° 200 WH CO



White - Copper

200CENT ROUND TWIN IP20 2 X 750LM CRI 92

2400°K 2700°K 3000°K 4000°K




REF N°	REF N°	REF N°	REF N°
514 19 520	514 19 920	514 19 820	514 19 720

2 x 6.2 W - 2 x 750LM - 2-Step MacAdam -

Serial wiring -

Requires remote LED driver - 250mA

Standard beam angle 36°

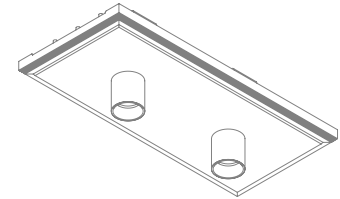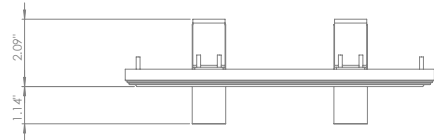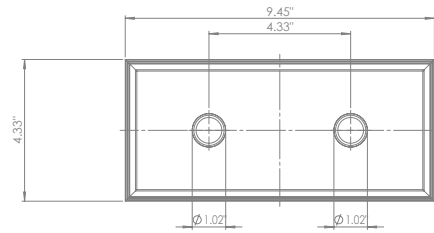


INSTALLATION KIT

STANDARD (included) installation system for ceiling 0.35" - 0.47" - 0.59"

REF N° 200 99 025 installation system for gypsum ceiling 0.98"

REF N° 200 99 030 installation system for gypsum ceiling 1.18"

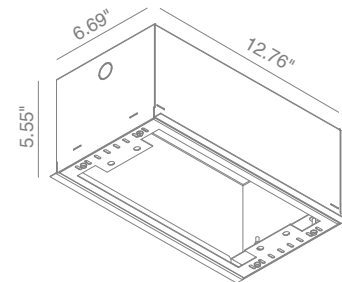

BEAM ANGLES

STANDARD (included) beam angle 36°

