



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS. READ ALL INSTRUCTIONS. IMPORTANT SAFETY INSTRUCTIONS. SAVE THESE INSTRUCTIONS.

DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION! Please read all instructions before installation.


- Keep these instructions for future reference.
- Must be installed by a qualified electrician in accordance with national and local standards. Designplan is not responsible for fixtures installed without regard to these standards.
- Unauthorized alterations or tampering of product voids warranty.
- The main power connection must be in accordance with local electrical codes.
- Suitable for INDOOR applications.
- DO NOT INSTALL INSULATION WITHIN 3.0" (76 mm) OF ANY PART OF THE LUMINAIRE.


**IP65**

Maintenance

Scheduled maintenance must be carried out once a year on all lighting devices, regardless of appliance class and type of use. It must include the following operations:

- Periodically clean fixtures to remove dirt from gratings and screw heads.
- Check tightness of screws on various parts of the device.
- Check that all cable glands and cables are intact and tight. Check that the glass or plastic lens is intact, and replace it if broken or damaged.
- The internal components such as the ballast, driver, washers and screws must not show clear signs of oxidation or rust. Clear traces of rust and oxidation will indicate the presence of water inside the device.
- In the case of damage, the components must be replaced by original components or spare parts.



MODEL	LAMP
10301	13.0W 120V 50/60Hz
<p><i>This product contains an efficiency class <X> light source</i></p> <p><i>Led can be replaced only from qualified personnel</i></p>	
	

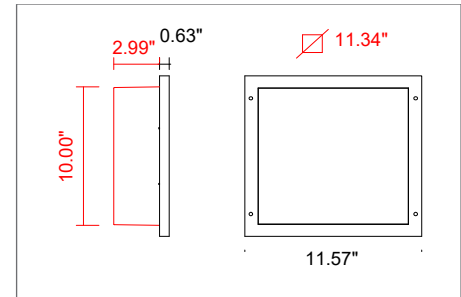

General Prescription


The safety of fixture is guaranteed only when it is used in accordance with following instructions, therefore it is necessary to keep them. Eventual tampering, transformations of fixture and wrong installations cause the loss of every guarantee. Before carrying out any installation or maintenance procedure, switch the electric power off.

THE FIXTURE IN CLASS 1 AND THEREFORE IT MUST BE USED FOR INSTALLATION WITH EARTH LINE

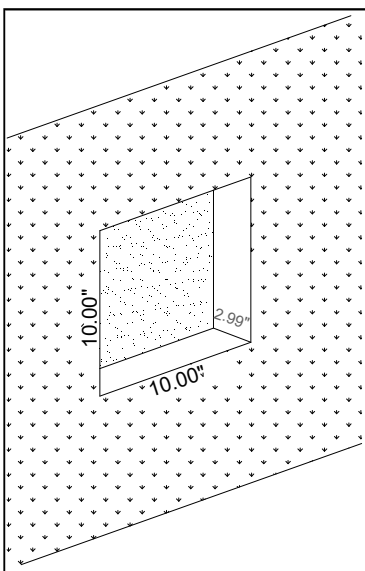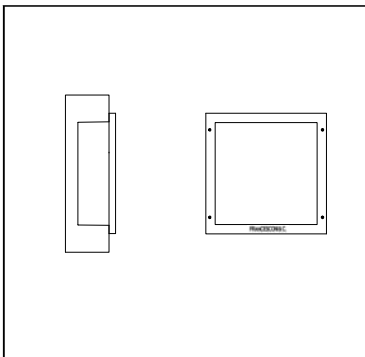

GB Installation of product.

To put the product only recessed in the wall, it is not suitable for installation in the ceiling. on the wall to make a square hole 10.16" x10.16" with depth 2.99". To make two holes on the wall respecting the fixing details on the drawing below mentioned and to fix the product by two screws of 4 Ma and relative tirax

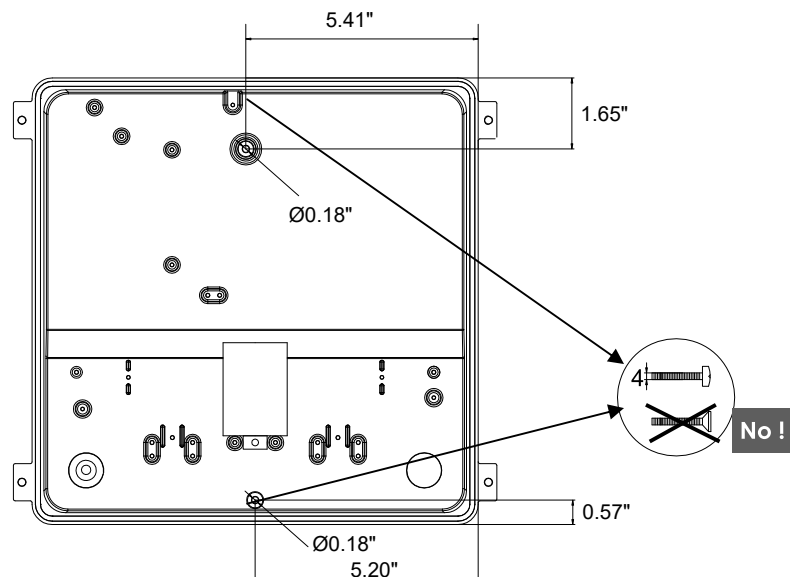

MAINTENANCE

GB In case of replacement of the lamp you have to respect the parameters indicated inside mark in the fixture. In case of braking or crack of diffuser to call our company in order to make the exact replacement. It is important to clear the fixture in order to avoid dirty deposit on the rubber closing gasket and inside the fixture. To clear the glass without abrasive product. In case of restitution of the material, after authorization by F.LLI FRANCECONI & C. SRL you have to turn back the fixture in our company free of charge on our part; the fixture not to be disassembled and you have to leave out a part of feeder (min. 3.94") near the cable blocker.