




INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS. READ ALL INSTRUCTIONS. IMPORTANT SAFETY INSTRUCTIONS. SAVE THESE INSTRUCTIONS.

DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION! Please read all instructions before installation.

- Keep these instructions for future reference.
- Must be installed by a qualified electrician in accordance with national and local standards. Designplan is not responsible for fixtures installed without regard to these standards.
- Unauthorized alterations or tampering of product voids warranty.
- The main power connection must be in accordance with local electrical codes.
- Suitable for OUTDOOR & FOUNTAIN applications.

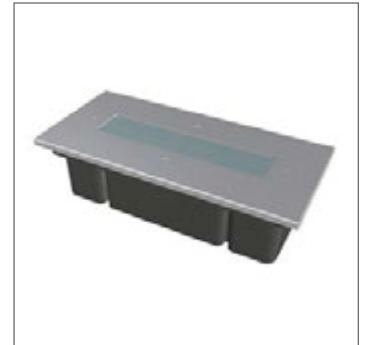

IP68

Electrical Connections:

- LED lights must be **connected in parallel** respecting polarities.
- **CHOOSE POWER SUPPLY ACCORDINGLY.** Please consider the voltage through which fixtures are fed as well as the max power consumption.
- **Connect power only if all the fixtures are connected.**
- This unit must be used in conjunction with a suitable fountain rated power supply.
- Use only Class 2 type electronic power supply.
- Never use switches on secondary circuit.

ATTENTION: For In-Grade - It is the contractor's responsibility to seal the conduit with "Great Stuff" aerosol seal that prevents water and moisture penetration for ultimate protection. Contractor **MUST** use gel-filled wire nuts.

Maintenance

Scheduled maintenance must be carried out once a year on all lighting devices, regardless of appliance class and type of use. It must include the following operations:

- Periodically clean fixtures to remove dirt from gratings and screw heads.
- Check tightness of screws on various parts of the device.
- Check that all cable glands and cables are intact and tight. Check that the glass or plastic lens is intact, and replace it if broken or damaged.
- The internal components such as the ballast, driver, washers and screws must not show clear signs of oxidation or rust. Clear traces of rust and oxidation will indicate the presence of water inside the device.
- In the case of damage, the components must be replaced by original components or spare parts.


REQUIRED ACCESSORIES

installation instructions

Accessories

DLP-FL-WC/SC/GC/AC/CC/BC

Type: Corian cover
Material: Corian
Finishing: Corian
Description: Corian cover White/Sand/Grey/Anthracite/Light Blue/Black

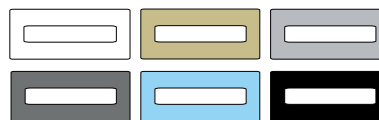

DLP-FL-Q

Type: stainless steel cover
Material: Stainless steel
Finishing: Stainless steel
Description: stainless steel cover



DLP-NC

Type: Technopolymer outercase
Material: Technopolymer
Finishing: Technopolymer
Description: Technopolymer outercase




CABLE ACCESSORY DETAIL

15 FEET OF CABLE PROVIDED.
IF LONGER CABLE REQUIRED, CUSTOM LENGTHS AVAILABLE.

Reel of cable*

MONO color



1 = + red
2 = - black

Code

CA-68-2-1
0.08x0.02in²

Custom cable*

MONO color



Max length 131.23'


Code

LAV-CAB-2

*On request it is possible to customize the length of the cable.

Reel of cable*

Tunable white




1 = + red
2 = WW blue
3 = CW green

Code

CA-68-4-1
0.16x0.02in²

Custom cable*

Tunable white



Max length 131.23'

Code

LAV-CAB-5

*On request it is possible to customize the length of the cable.

Reel of cable*

RGBW



1 = + black
2 = red
3 = green
4 = blue
5 = white

Code

CA-68-5-1
0.20x0.02in²

Custom cable*

RGBW




Max length 131.23'

Code


LAV-CAB-5

*On request it is possible to customize the length of the cable.

FIXTURE DIMENSION

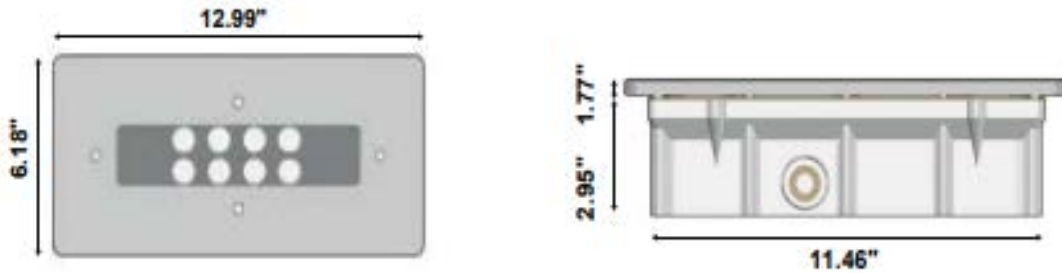


Installation Recommendations

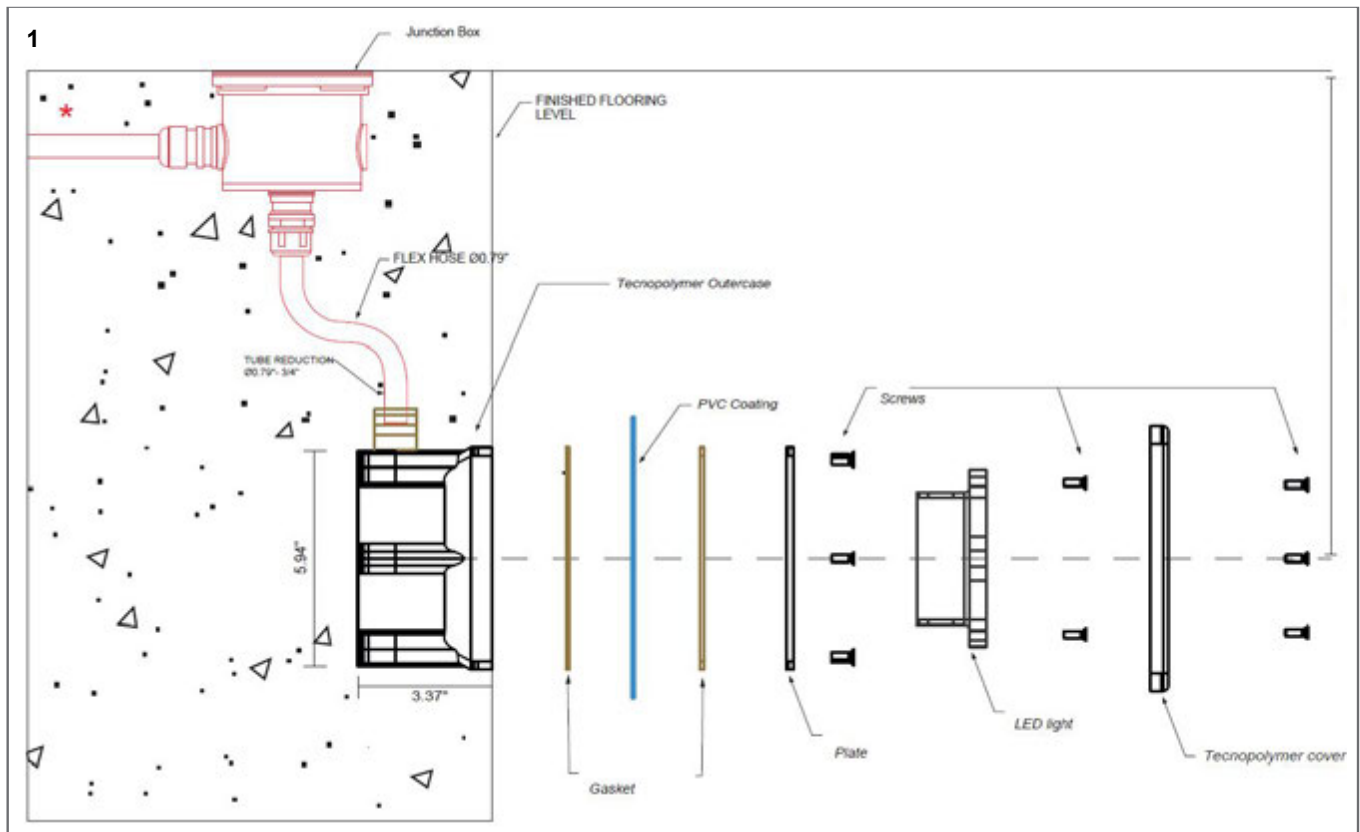

DOLPHIN installation scheme for PVC coating.
Recommended mounting height -15.75" ÷ -23.62" in from the edge of the water.


Installation Recommendations

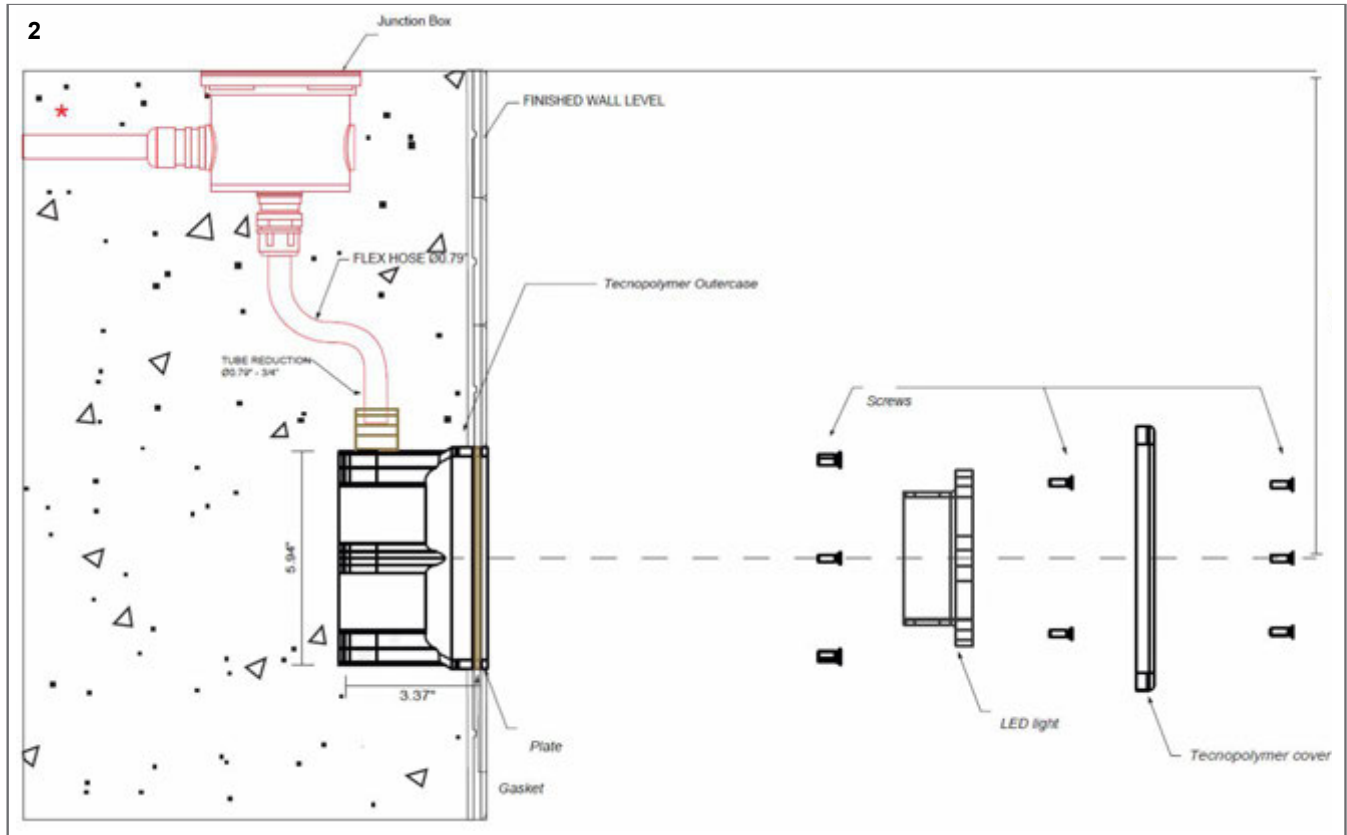

DOLPHIN installation scheme for concrete with tile.


Recommended mounting height -15.75" ÷ -23.62" in from the edge of the water

Installation Recommendations

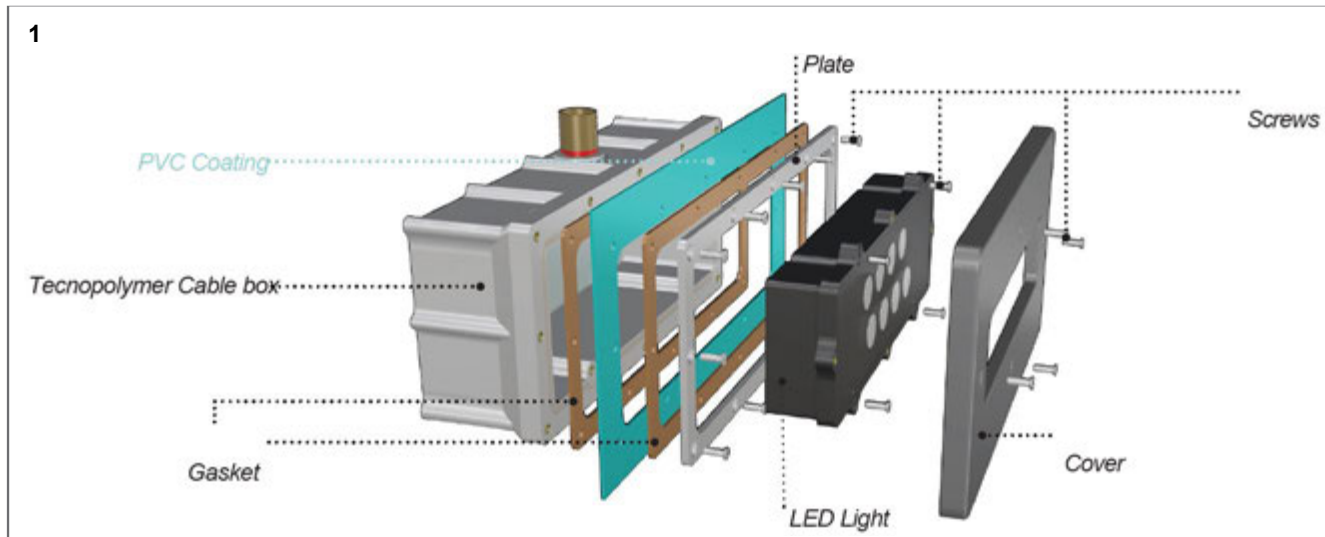

DOLPHIN PVC coating exploded view.


The fixture consists of a cover, LED light, plate, gasket, PVC coating, and tecnopolymer cable box.

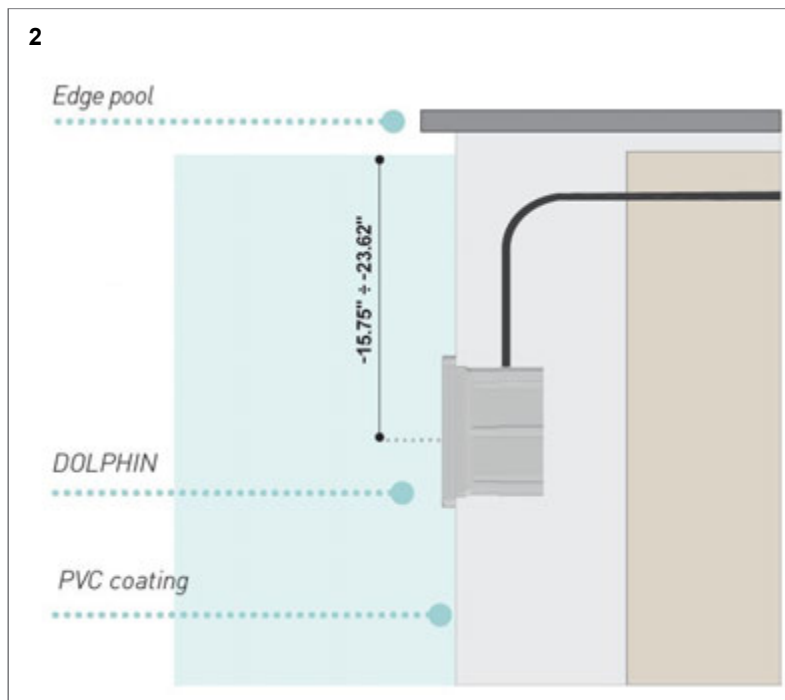

DOLPHIN mounting instructions.

Recommended mounting height -15.75" ÷ -23.62" in from the edge of the water


Installation Recommendations

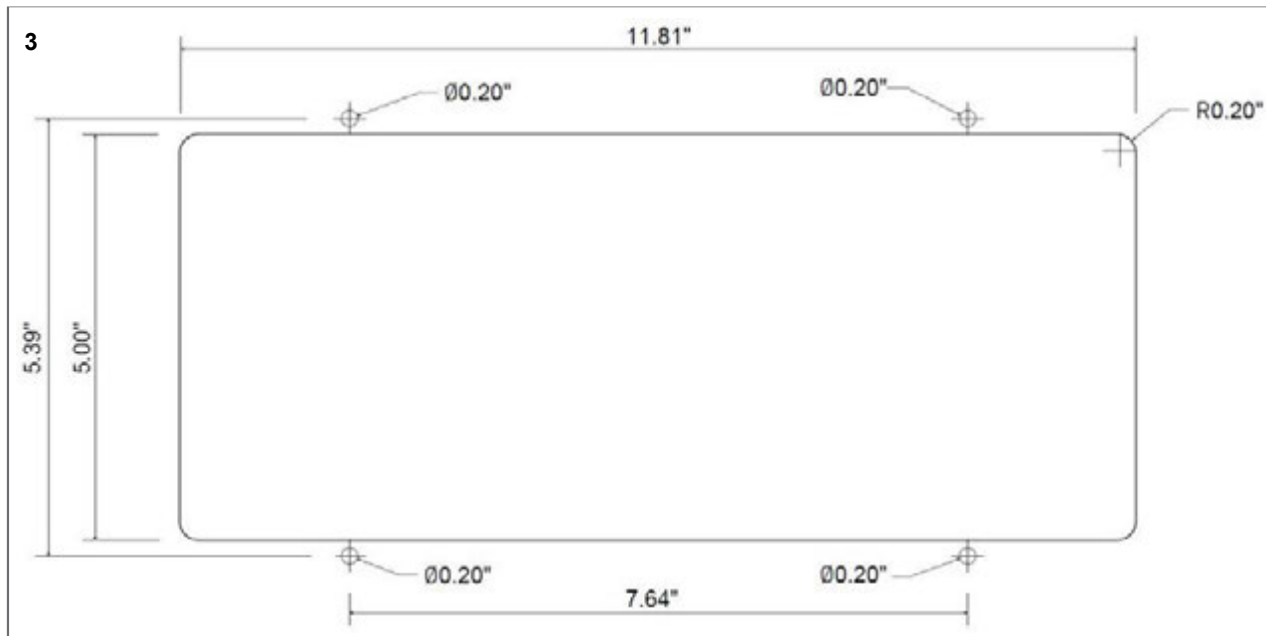

DOLPHIN Panel Cutout.
Fixture cutout and drill hole pattern




Wiring Diagram

24VDC
(Static White Parallel Connection)

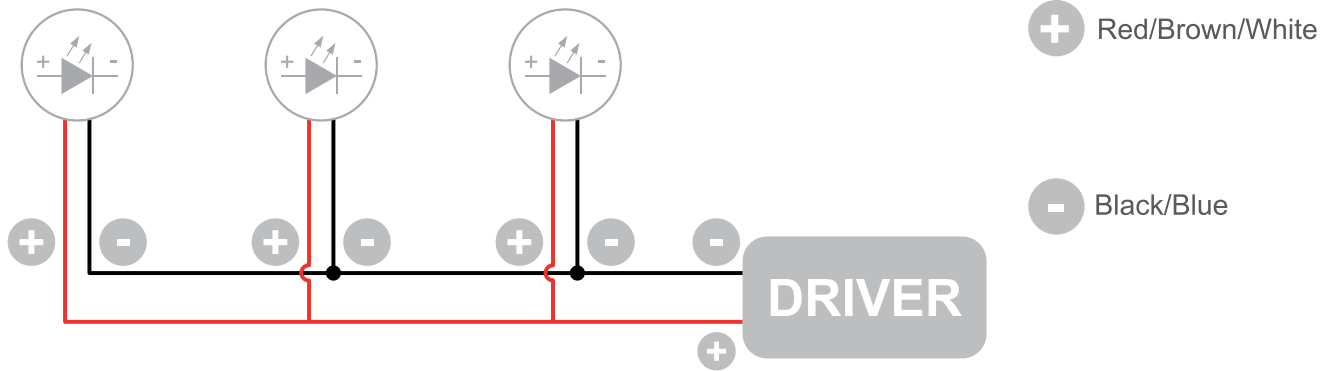

! The individual lamps must be connected in parallel. Only power up the system once all the lamps have being connected.

Static White / Tunable White / RGBW

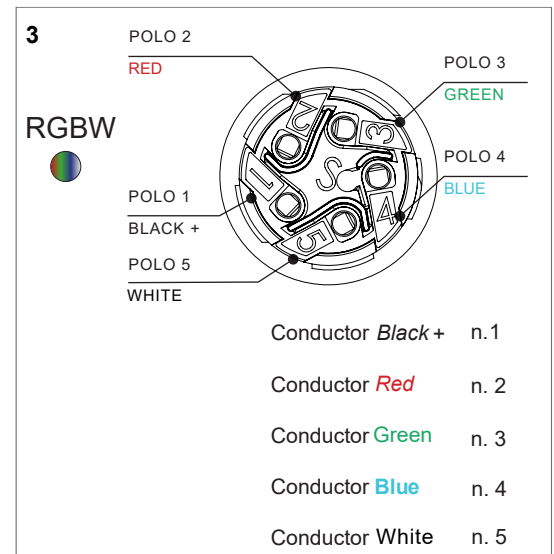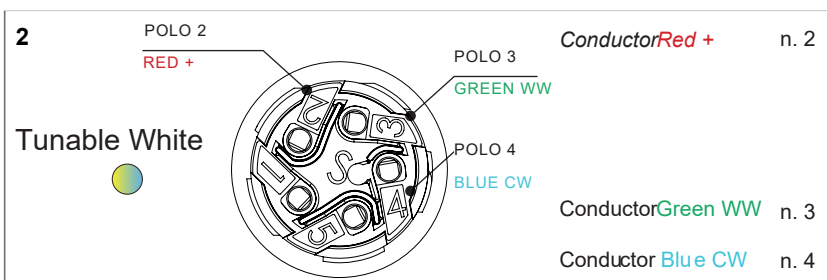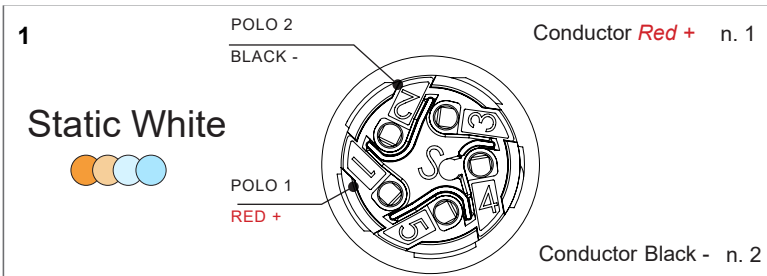

- Only power up the system once all the lamps are connected. Connecting an individual lamp to an active power supply may cause the lamp to break due to over-voltage.
- Lamps and power supply units must be installed in well-ventilated boxes or locations to allow a natural heat diffusion and avoid the devices overheating.
- On the power system, install a surge protection device to reduce the intensity of any voltage spikes to protect the lighting fixtures from the risk of damage.
- Fixture NOT suitable for covering with thermally insulating material.