


A1-65 and A1-E



datasheet

A1-65 and A1-E are recessed linear profiles suitable for wall or ceiling installation, providing maximum visual comfort and performance. A1-65 is IP65-rated and comes in 4 standard pre-cut lengths, while A1-E is IP40-rated and custom cuttable in the field. Both are anodized aluminum with diffused optics and available in 3 color temperatures.

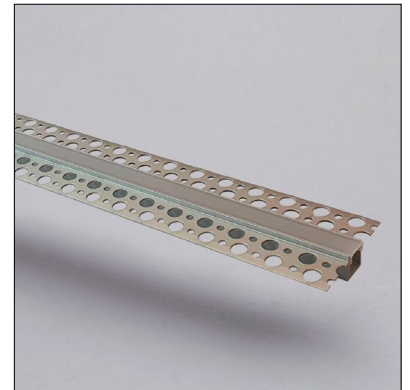

Fixture Dimensions - See page 2

TECHNICAL DATA

Wattage	14.4W per 3.28 ft (1 m)
Power Supply	Remote, not included. Consult Factory.
Construction	Body: Anodized Aluminum Cable Length: 1.64' (connected at rear)
CCT	2700K, 3000K, 4000K
Delivered Lumens	1070 lm per 3.28' (3000K)
Efficacy	74.3 lm/W per 3.28" (3000K)
Optics	Diffuse
Finishes	Anodized Aluminum
Fixture Dimensions	19.7", 39.4", 59.1", 78.7" l x 2.1" w x 0.7" (A1-65) 196.9" maximum length x 2.1" w x 0.7" h (A1-E)
Aperature	0.4" x length
Color Consistency	<3-Step MacAdam
IP Rating	IP65 (A1-65) IP40 (A1-E)
Impact Resistance	IK08

ORDERING INFORMATION

Example: LM04.104536.US.03.DI.BP.P. Accessories / Power Supplies ordered separately.





	03			
Model No.	Finish	Optic	CCT	Cable Exit
LM04.104535.US (19.7" length)	03 - Anodized Aluminum	DI - Diffuse	BC - 2700K	P - Rear Exit
LM04.104536.US (39.4" length)			BP - 3000K	
LM04.104537.US (59.1" length)		DP - Perpendicular Diffuse	BF - 4000K	Circuit Power 15 - 14.4W/3.28 ft
LM04.104538.US (78.7" length)				
LM30.104543.US (LED Circuit Reel) <i>Profile housing sold separately and can be found under installation accessories on page 2.</i>				

Job Name/Date:

Fixture Type Designation:



FIXTURE DIMENSIONS - A1-65

Standard Lengths

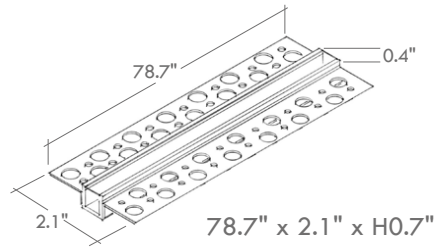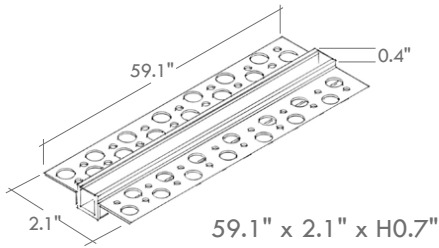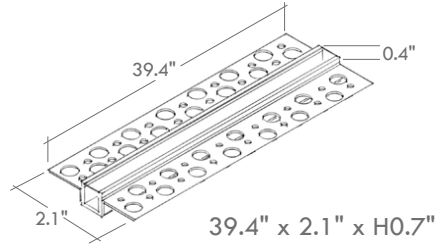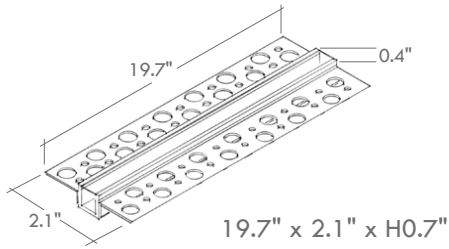


FIXTURE DIMENSIONS - A1-E

Custom Cuttable

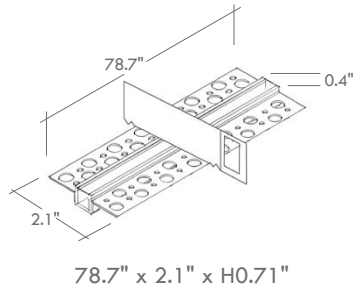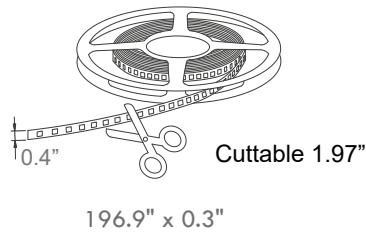

ACCESSORIES - Installation



SOLD INDIVIDUALLY
Order 2 per fixture

LM20.104545
Closing end cap



LM30.104540.US
(78.7" length)
Housing for Custom Cuttable

Job Name/Date:


Fixture Type Designation:

SUGGESTED POWER SUPPLIES

Consult Factory

PHOTOMETRIC DATA

Note: All photometric data is 3000K

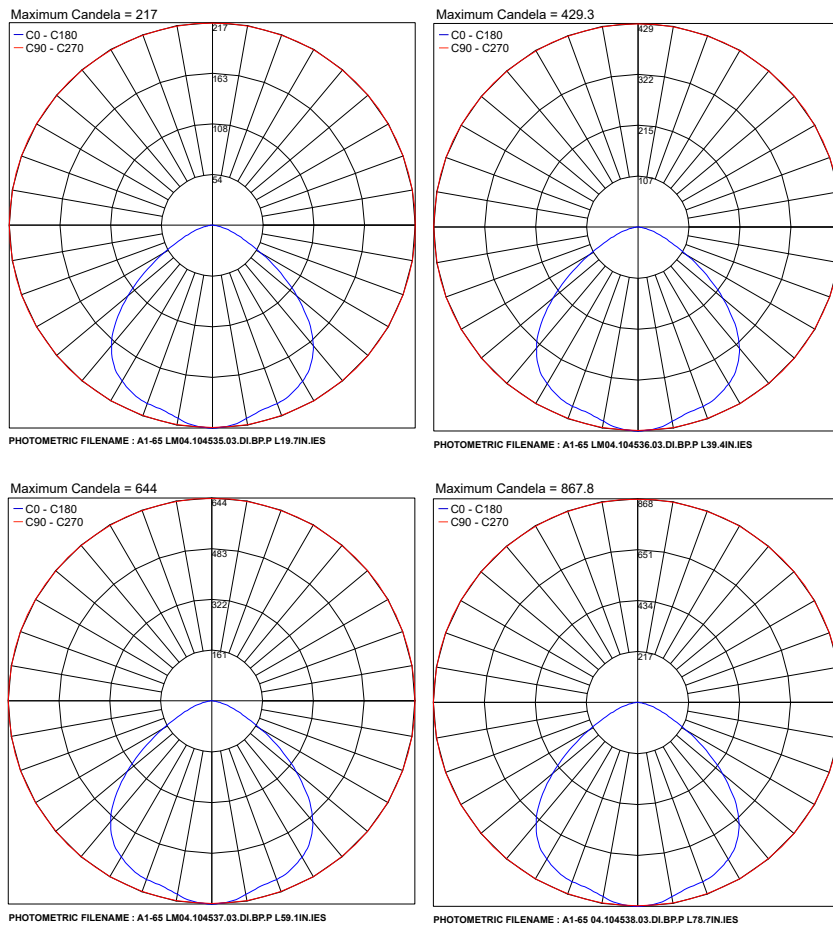

Job Name/Date:

Fixture Type Designation: