

# ALDER 1000


Alder 1000 is a 39.4" bollard for outdoor installation with a radial 360° light distribution with an integral driver. Alder comes in 3 different heights, each available in 2 color temperatures and 3 standard finishes. Dark Sky compliant for output below 80°.



## TECHNICAL DATA

<b>Wattage / Input</b>	20W (120VAC)
<b>Power Supply</b>	Integral 0-10V Dimming
<b>Construction</b>	Head/Pole: Extruded Copper-free Aluminum Lens: Tempered Safety Glass Cable Length: 4.92' included
<b>CCT</b>	3000K, 4000K
<b>BUG Rating</b>	B1-U1-G1 (3000K)
<b>Delivered Lumens</b>	1600 lm (3000K) Dark Sky compliant, output below 80°
<b>Efficacy</b>	80 lm/W
<b>Optics</b>	Radial 360°
<b>Finishes</b>	Textured Gray, Anthracite Gray, Matte Black (on request)
<b>Fixture Dimensions</b>	8.0" head x Ø2.76" base x 39.4" h
<b>Fixture Weight</b>	10.58 lbs
<b>LED Source</b>	24 CREE "XH-G" LED
<b>IP Rating</b>	IP66
<b>IK Rating</b>	IK09

Fixture Dimensions:

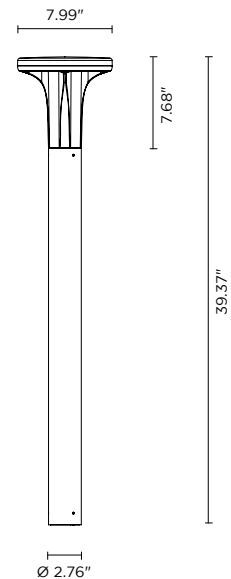

## ORDERING INFORMATION

Example: 602203P-30K-360-AG. Accessories ordered separately.

602203P	-		-	360	
Model No.	CCT	Optics	Finish		
602203P	30K - 3000K 40K - 4000K	360 - 360°	<b>TG</b> - Textured Gray <b>AG</b> - Anthracite Gray <b>MB</b> - Matte Black (on request)		

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES

### Installation




**AC065**  
Anchorage Unit

## PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 384

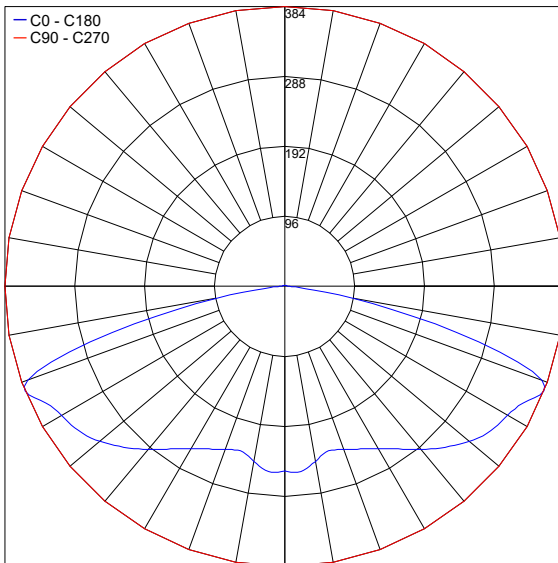

PHOTOMETRIC FILENAME : ALDER 1000 - 602203P 3000K 20W.IES

Job Name/Date:

Fixture Type Designation: