


Alder 400 is a 15.75" bollard for outdoor installation with a radial 360° light distribution with an integral driver. Alder comes in 3 different heights, each available in 2 color temperatures and 3 standard finishes. Dark Sky compliant.



## TECHNICAL DATA

<b>Wattage</b>	20W
<b>Power Supply</b>	Integral 120VAC - On / Off 0-10V Dim - <i>Remote Only</i> - Consult Factory
<b>Construction</b>	Head/Pole: Extruded Copper-free Aluminum Lens: Tempered Safety Glass Cable Length: 4.92' included
<b>CCT</b>	3000K, 4000K
<b>BUG Rating</b>	B1-U1-G0
<b>Delivered Lumens</b>	1600 lm (3000K) Dark Sky compliant
<b>Efficacy</b>	80 lm/W
<b>Optics</b>	Radial 360°
<b>Finishes</b>	Textured Gray, Anthracite Gray, Matte Black (on request)
<b>Fixture Dimensions</b>	8.0" head x Ø2.76" base x 15.75" h
<b>Fixture Weight</b>	6.61 lbs
<b>LED Source</b>	24 CREE "XH-G" LED
<b>IP Rating</b>	IP66
<b>IK Rating</b>	IK09

Fixture Dimensions:



## ORDERING INFORMATION

Example: 602201P-30K-360-AG. Accessories ordered separately.

602201P -  - 360

Model No.	CCT	Optics	Finish
602201P	30K - 3000K 40K - 4000K	360 - 360°	TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request)

Job Name/Date:

Fixture Type Designation:


## ACCESSORIES

### Installation

**AC065**

Anchorage Unit

## PHOTOMETRIC DATA

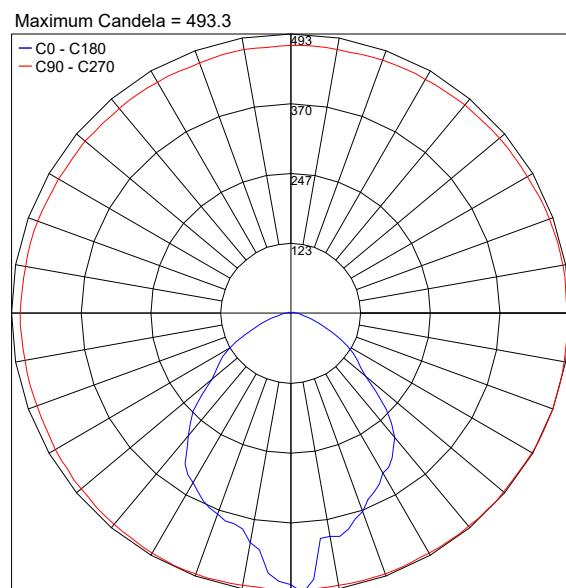*Note: All photometry is 3000K*

Job Name/Date:

Fixture Type Designation: