


Alder 800 is a 31.5" bollard for outdoor installation with a radial 360° light distribution with an integral driver. Alder comes in 3 different heights, each available in 2 color temperatures and 3 standard finishes. Dark Sky compliant.



TECHNICAL DATA

Wattage	20W
Power Supply	Integral 120VAC - On / Off 0-10V Dim - <i>Remote Only</i> - Consult Factory
Construction	Head/Pole: Extruded Copper-free Aluminum Lens: Tempered Safety Glass Cable Length: 4.92' included
CCT	3000K, 4000K
BUG Rating	B1-U1-G0
Delivered Lumens	1600 lm (3000K) Dark Sky compliant
Efficacy	80 lm/W
Optics	Radial 360°
Finishes	Textured Gray, Anthracite Gray, Matte Black (on request)
Fixture Dimensions	8.0" head x Ø2.76" base x 31.5" h
Fixture Weight	9.48 lbs
LED Source	24 CREE "XH-G" LED
IP Rating	IP66
IK Rating	IK09

Fixture Dimensions:

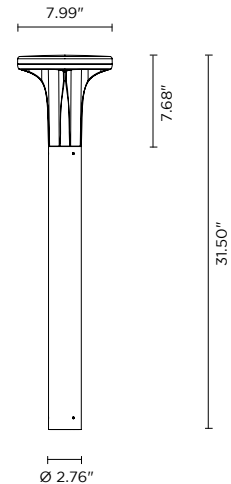

ORDERING INFORMATION

Example: 602202P-30K-360-AG. Accessories ordered separately.

602202P	-		-	360	
Model No.	CCT	Optics	Finish		
602202P	30K - 3000K 40K - 4000K	360 - 360°	TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request)		

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

Installation



AC065


Anchorage Unit

PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 483.4

— C0 - C180
— C90 - C270

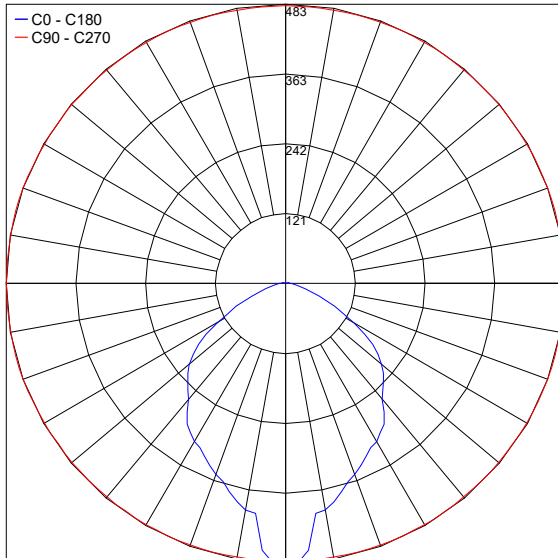

PHOTOMETRIC FILENAME : ALDER 800 - 602202P 3000K WARMWHITE 20W SYM.IES

Job Name/Date:

Fixture Type Designation: