


Atmos is an award-winning indoor wall washer luminaire that integrates into the wall so that when the lights are out, the fully paintable fixture seems to vanish into the wall. It can be installed so that the light beam is at the top or the bottom.



TECHNICAL DATA

Wattage / Input	7W (250mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: CALCYT® Plaster Lens: Clear Acrylic
CCT	2200K, 2700K, 3000K, 4000K, Dim to Warm
CRI	>80, >90 (2700K, 3000K)
Optics	Fixed
Finishes	Paintable Plaster
Cut-Out Dimensions	20.08" x 20.08"
Fixture Dimensions	19.84" x 19.84"
LED Source	Bridgelux Vero 10G7 LED (600 lm) Bridgelux Vero 18G7 LED (1000 lm)
Color Consistency	2-Step MacAdam Dim to Warm Version: 4-Step MacAdam
IP Rating	IP20

Wall Cut-Out: 20.08" x 20.08"
Fixture Dimensions

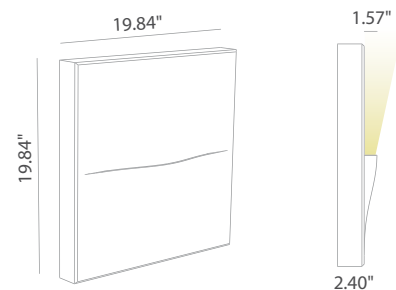

ORDERING INFORMATION

Example: 145 29 200. Accessories / Power Supplies ordered separately.

Model No.	Description
145 29 500 - 2200K	600 lm, CRI>80, 250mA
145 29 000 - 2700K	600 lm, CRI>90, 250mA
145 29 100 - 3000K	600 lm, CRI>90, 250mA
145 29 600 - WarmDim	500 lm, CRI>80, 250mA
145 29 300 - Royal Blue	
145 28 000 - 2700K	1000 lm, CRI>80, 250mA
145 28 100 - 3000K	1000 lm, CRI>80, 250mA
145 28 200 - 4000K	1000 lm, CRI>80, 250mA

Job Name/Date:

Fixture Type Designation:


SUGGESTED POWER SUPPLIES

250mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 10W, Class 2	1-1
PPLT00290	Leading / Trailing-Edge Dimming to 10% (120V only)	120-277VAC to 250mA, 16W, Class 2	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 20W, Class 2	1-2
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 250mA, 30W, Class 2	1-2
PPLT00480-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 30W, Class 2	1-2
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 50W, Class 2	1-2
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 250mA, 100W, Class 2	1-8

For other power supply options consult factory.

REQUIRED ACCESSORIES - Installation



745 01 000 (Required)
Plaster Kit - Outer Casing

Job Name/Date:

Fixture Type Designation: