



B55 is a surface mounted, low voltage track lighting system for interiors, used for spotlights, pendants and linear installations. Track and structures can be managed by non-dim remote control systems. The length of the profile is between 48.0" and 96.0", extruded in aluminum with white and black finishes, it is fitted with 48V wires.

TECHNICAL DATA

Wattage / Input	Based on head, pendant or linear luminaire
Power Supply	Remote 48VDC, not included. See page 2.
Dimming	See track heads for dimming protocol
Construction	Body: Aluminum
CCT	See track head, pendant, linear datasheets
CRI	>90
Mounting	Recessed, Surface or Suspended
Finishes	White RAL 9016, Black RAL 9005
Lengths	48.0" or 96.0"
Circuits	2 x ±15 A · 48 VDC 1 x ±15 A · 48 VDC + D+/D-
Notes	B55 is a 48V powered electrical system and limited to a maximum current of 15 A. The supply connectors, plugs and further fixture accessories must be ordered separately. Any 90° connector must be ordered separately to ensure electric continuity in the corners. Light points cannot be installed in the corners. For ceiling or wall mounting, it's possible to fix the rail directly with self-tapping countersunk head screws, while the suspended installation requires the purchase of the specific kit.



Fixture Dimensions



ORDERING INFORMATION

Example: BUT048T02W11071.US. Power Supplies / Accessories ordered separately.

BUT048T02		1		1	US
Model No.	Finish		Length		
BUT048T02	W1 - White	1	07 - 48.0"	1	US
	B1 - Black		08 - 96.0"		

Job Name/Date:

Fixture Type Designation:

CLASS 2 LOW VOLTAGE - SUGGESTED POWER SUPPLIES

For other power supply options consult factory.

Part Number	Description	Input/Output	# of Fixtures
PPLT00577	Non-Dim	120-277VAC to 48VDC, 96W, Class 2	Any combo of fixtures may be used as long as the total wattage does not exceed 77W

CLASS 1 LOW VOLTAGE - SUGGESTED POWER SUPPLIES

For other power supply options consult factory (Requires J-Box mounting and J-Box cover ACC0036)

Part Number	Description	Input/Output	# of Fixtures
PPLT00672	Non-Dim	120-277VAC to 48VDC, 320W, Class 1	Any combo of fixtures may be used as long as the total wattage does not exceed 320W

For use with these track heads, pendants and linear fixtures



C1



INCISO Q4 48V



L1



M1 48V



Q1 48V



Q4 48V



THE TUBE 48V



X1 48V





Y1 48V



Z1 48V

ACCESSORIES



BUT048A000_

Power Head - to be used at the beginning

Must choose one power feed

01W1 - white RAL 9016

02B1 - black RAL 9005


BUT048A000_

Through Joint

03W1 - white RAL 9016

04B1 - black RAL 9005

Used to connect two tracks and to guarantee the supply of current.




BUT048A000_

90° Corner Joint

05W1 - white RAL 9016

06B1 - black RAL 9005

Used to connect two tracks joined at 90° and to guarantee that current reaches the corners. Light points cannot be installed in the corners.



BUT048A000_

Flexible Joint

07W1 - white RAL 9016


08B1 - black RAL 9005

Used to connect two tracks installed on different surfaces (ceiling-wall) or to create different angles from 90° and to guarantee power supply. Light points cannot be installed in the corners.

Job Name/Date:

Fixture Type Designation:

ACCESSORIES (continued)




BUT048A000_

Closure Plug

11W1 - white RAL 9016

12B1 - black RAL 9005




BUT048A000_

Holed Closure Plug

15W1 - white RAL 9016

16B1 - black RAL 9005

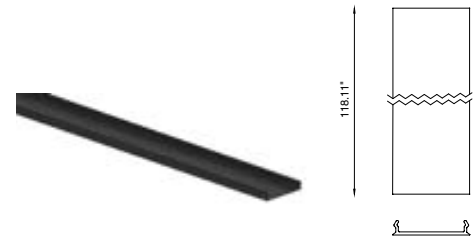

BUT048A000_ B1


Closing Cover

56 - 39.37"

57 - 78.74"


18 - 118.11"

Cover installable at the bottom between the various spotlights, to hide the inside of the track and to allow aesthetic continuity.



BUTRK0000042

Cutter

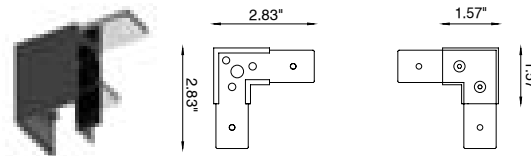


BUT048A000_

90° Corner Joint Cover

21W1 - white RAL 9016

22B1 - black RAL 9005

The 90° corner joint allows the mechanical connection of the tracks, forming a 90° angle, without cutting them at 45°.




BUT048A0002400

Suspension & Junction Kit

21W1 - white RAL 9016

22B1 - black RAL 9005

Kit composed of metallic spherical rose, steel cable Ø0.06" (1.5 mm) and automatic screw coupling attached to the bracket. Cable length 9.84' (3 m) (on request different lengths are available). Position the fixture kit with an inter-axis of 17.72" (450 mm) for a max capacity of 110.2 lbs, or 35.43" (900 mm) for max 55.1 lbs.

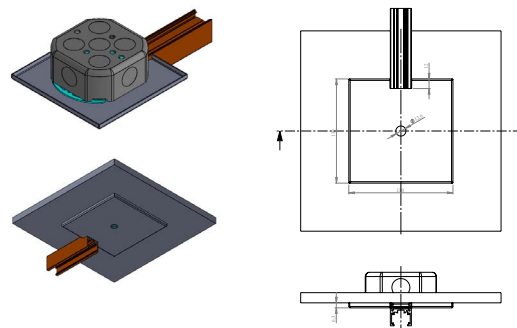

ACC0036

J-Box Cover for 48V Track

For Class 1

High Voltage requires J-Box Cover and Connection to J-Box.

Job Name/Date:

Fixture Type Designation: