



B55



- matte white RAL 9016 painted
- matte black RAL 9005 painted

LIGHT MODULES



C1



INCISO Q4 48V



L1

Lighting system for interiors, for pendant and surface installation. Track and structures can be managed by non-dim remote control systems. The length of the profile is between 48.0" or 96.0", extruded in aluminum with white and black finishes, it is fitted with 48V wires.



M1 48V



Q1 48V



Q4 48V



THE TUBE 48V



X1 48V



Y1 48V



Z1 48V

CODE COMPOSITION

BUT048 T 02	1	1	<i>length</i>	
			07	48.0"
			08	96.0"
			<i>finishing</i>	
			W1	white RAL 9016
			B1	black RAL 9005

example of code composition BUT048 T 07 **W1** 1 **01** 1

TECHNICAL FEATURES

Code	BUT048 T 02 XX
Type	Low voltage track
Material	Aluminum
Finishing	White RAL 9016 Black RAL 9005
Weight	-
Mounting	Surface Suspension
IP rating	-
Control gear	Remote power supply (not included)
Dimensions	A: 48.0" 96.0"
Cut out for plasterboard	-
Voltage connection	48 VDC
Circuits	2 x ±15 A · 48 VDC 1 x ±15 A · 48 VDC + D+/D-
Note	B55 is a 48V powered electrical system and limited to a maximum current of 15 A.

The supply connectors, plugs and further fixture accessories must be ordered separately.

Any 90° connector must be ordered separately to ensure electric continuity in the corners.

Light points cannot be installed in the corners.

For ceiling or wall mounting, it's possible to fix the rail directly with self-tapping countersunk head screws, while the suspended installation requires the purchase of the specific kit.



79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

POWER HEAD





CODE COMPOSITION


BUT048 A 000_

<i>finishing</i>	
01 W1	white RAL 9016
02 B1	black RAL 9005

example of code composition BUT048 A 00001 W1

TECHNICAL FEATURES

Code	BUT048 A XX
Type	Non-polarised power head
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	Plug-in
Voltage connection	15 A max · 48 VDC
Note	-



THROUGH JOINT





CODE COMPOSITION


BUT048 A 000_

<i>finishing</i>	
03 W1	white RAL 9016
04 B1	black RAL 9005

example of code composition BUT048 A 00003 W1

TECHNICAL FEATURES

Code	BUT048 A XX
Type	Non-polarised through joint
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	Plug-in
Voltage connection	15 A max · 48VDC
Note	Used to connect two tracks and to guarantee the supply of current.



90° CORNER JOINT





CODE COMPOSITION


BUT048 A 000_

<i>finishing</i>	
05 W1	white RAL 9016
06 B1	black RAL 9005

example of code composition BUT048 A 00005 W1

TECHNICAL FEATURES

Code	BUT048 A XX
Type	Non-polarised 90° corner joint
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	Plug-in
Voltage connection	15 A max · 48VDC
Note	Used to connect two tracks joined at 90° and to guarantee that current reaches the corners. Light points cannot be installed in the corners.



FLEXIBLE JOINT



CODE COMPOSITION


BUT048 A 000_

<i>finishing</i>	
07 W1	white RAL 9016
08 B1	black RAL 9005

example of code composition BUT048 A 00007 W1

TECHNICAL FEATURES

Code	BUT048 A XX
Type	Flexible joint
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	Plug-in
Voltage connection	15 A max · 48VDC
Note	Used to connect two tracks installed on different surfaces (ceiling-wall) or to create different angles from 90° and to guarantee power supply. Light points cannot be installed in the corners.



CLOSURE PLUG



CODE COMPOSITION


BUT048 A 000_

<i>finishing</i>	
11 W1	white RAL 9016
12 B1	black RAL 9005


example of code composition BUT048 A 00011 W1

TECHNICAL FEATURES

Code	BUT048 A XX
Type	Closure plug
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws (included)
Note	-



HOLED CLOSURE PLUG

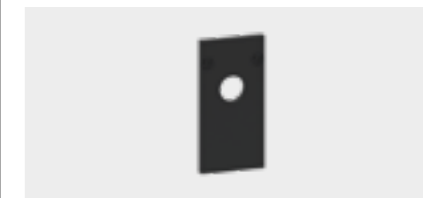



CODE COMPOSITION


BUT048 A 000_

<i>finishing</i>	
15 W1	white RAL 9016
16 B1	black RAL 9005

example of code composition BUT048 A 00015 W1

TECHNICAL FEATURES

Code	BUT048 A XX
Type	Closure plug with hole for cable passage
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws (included)
Note	-



CLOSING COVER



CODE COMPOSITION


BUT048 A 000_ B1

	length
56	39.37"
57	78.74"
18	118.11"

example of code composition BUT048 A 00018 B1

TECHNICAL FEATURES

Code	BUT048 A XX
Type	Aesthetic closing cover
Material	PMMA
Finishing	Black RAL 9005
Fixing	-
Note	Cover installable at the bottom between the various spotlights, to hide the inside of the track and to allow aesthetic continuity.

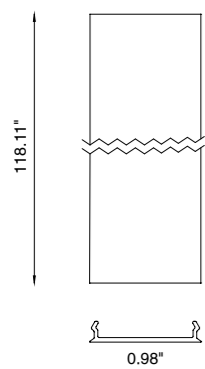

CUTTER




CODE COMPOSITION

BUTRK 00000 42

TECHNICAL FEATURES

Code	BUTRK 00000 42
Type	Conductor cutting pliers
Material	-
Finishing	-
Fixing	-
Note	The 39.4" / 78.7" / 118.1" (1000 / 2000 / 3000 mm) long tracks are supplied with copper wires already tested with respect to the aluminum in order to prevent the copper terminals from coming into contact with each other, in the case of double power supply, or, to prevent them from touching each other, if closure plugs are used. If it should be necessary to shorten the length of the track during installation, use the special cutting nippers taking care to pull out the four wires by at least 5 mm to guarantee correct electric distances.



90° CORNER JOINT COVER



CODE COMPOSITION


BUT048 A 000_

	finishing
21 W1	white RAL 9016
22 B1	black RAL 9005

example of code composition BUT048 A 00021 W1

TECHNICAL FEATURES

Code	BUT048 A XX
Type	90° corner joint cover
Material	Aluminum body, steel bracket
Finishing	White RAL 9016 Black RAL 9005
Fixing	By screws
Note	The 90° corner joint allows the mechanical connection of the tracks, forming a 90° angle, without cutting them at 45°.

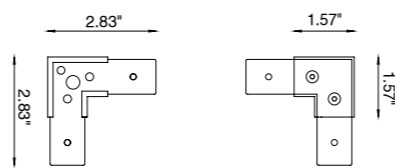

SUSPENSION AND JUNCTION KIT




CODE COMPOSITION

BUT048 A 00024 00

TECHNICAL FEATURES

Code	BUT048 A 00024 00
Type	Suspension and junction kit
Material	Steel
Finishing	-
Fixing	-
Note	Kit composed of metallic spherical rose, steel cable (Ø0.06" (1.5 mm) and automatic screw coupling attached to the bracket. Cable length 9.84' (3 m) (on request different lengths are available). Position the fixture kit with an inter-axis of 17.72" (450 mm) for a max capacity of 110.2 lbs. or 35.43" (900 mm) for max 55.1 lbs.

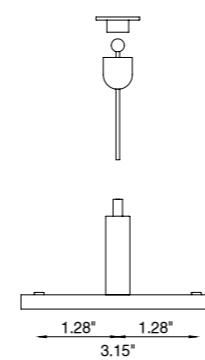

SUPPLY BOX



CODE COMPOSITION

BUT048 A 000_

	finishing
58 W1	white RAL 9016
59 B1	black RAL 9005

example of code composition BUT048 A 00058 W1

TECHNICAL FEATURES

Code	BUT048 A XX
Type	48V supply box
Material	Steel
Finishing	White RAL 9016 Black RAL 9005
Fixing	By screws
Insulation class	-
Voltage connection	-
Note	The purpose of the supply box attached to the surface is to house the driver in all those situations in which a remote driver cannot be used.

