


BIG IP54 is an outdoor or bathroom recessed wall luminaire and the larger brother of the original Normall. It features a minimalist design characterized by pure and simple lines. The curved back is optimized to create a great indirect lighting solution for a range of interiors.



Wall Cut-Out: 10.5" x 15.5"
Fixture Dimensions

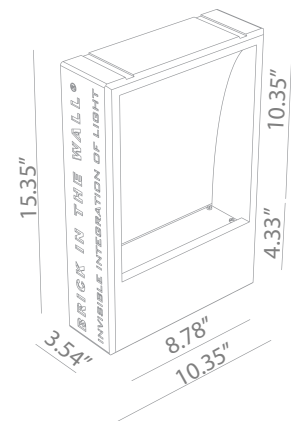

TECHNICAL DATA

Wattage / Input	9.1W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: CALCYT® Plaster Lens: Tempered Glass
CCT	2200K, 2700K, 3000K
CRI	>90
Optics	Fixed
Delivered Lumens	1200 lm (3000K)
Finishes	Paintable Plaster
Cut-Out Dimensions	10.55" x 15.55"
Fixture Dimensions	10.35" w x 3.54" l x 15.35" h
Color Consistency	2-Step MacAdam
IP Rating	IP54

ORDERING INFORMATION

Example: 104 28 105. Accessories / Power Supplies ordered separately.

Model No.	Description
104 28 501 - 2200K (9.1W, 1200 lm)	Bathroom - Remote Driver
104 28 001 - 2700K (9.1W, 1200 lm)	Bathroom - Remote Driver
104 28 101 - 3000K (9.1W, 1200 lm)	Bathroom - Remote Driver
104 28 505 - 2200K (9.1W, 1200 lm)	Outdoor - Remote Driver
104 28 005 - 2700K (9.1W, 1200 lm)	Outdoor - Remote Driver
104 28 105 - 3000K (9.1W, 1200 lm)	Outdoor - Remote Driver

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2	1-1
PPLT00262	Leading / Trailing-Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2	1-2
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-2


Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	2-2

For other power supply options consult factory.

REQUIRED ACCESSORIES


Installation

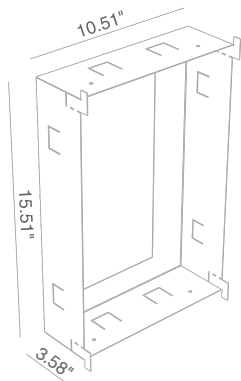

704 01 000
Outer Casing

PHOTOMETRIC DATA

Note all Photometry is 3000K

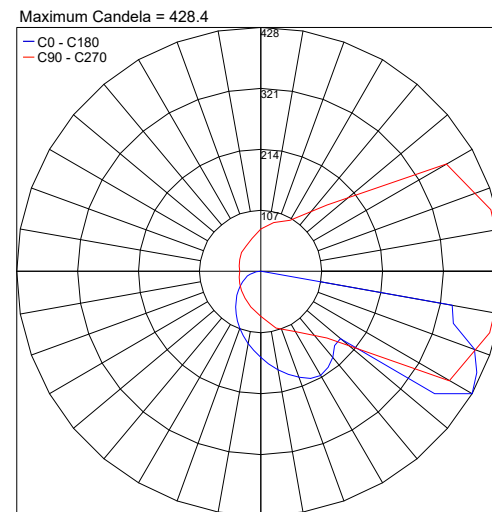

PHOTOMETRIC FILENAME : BIG LED (1200LM, CRI90).IES

Job Name/Date:

Fixture Type Designation: