
Ø1.97" 3.94"





Bard

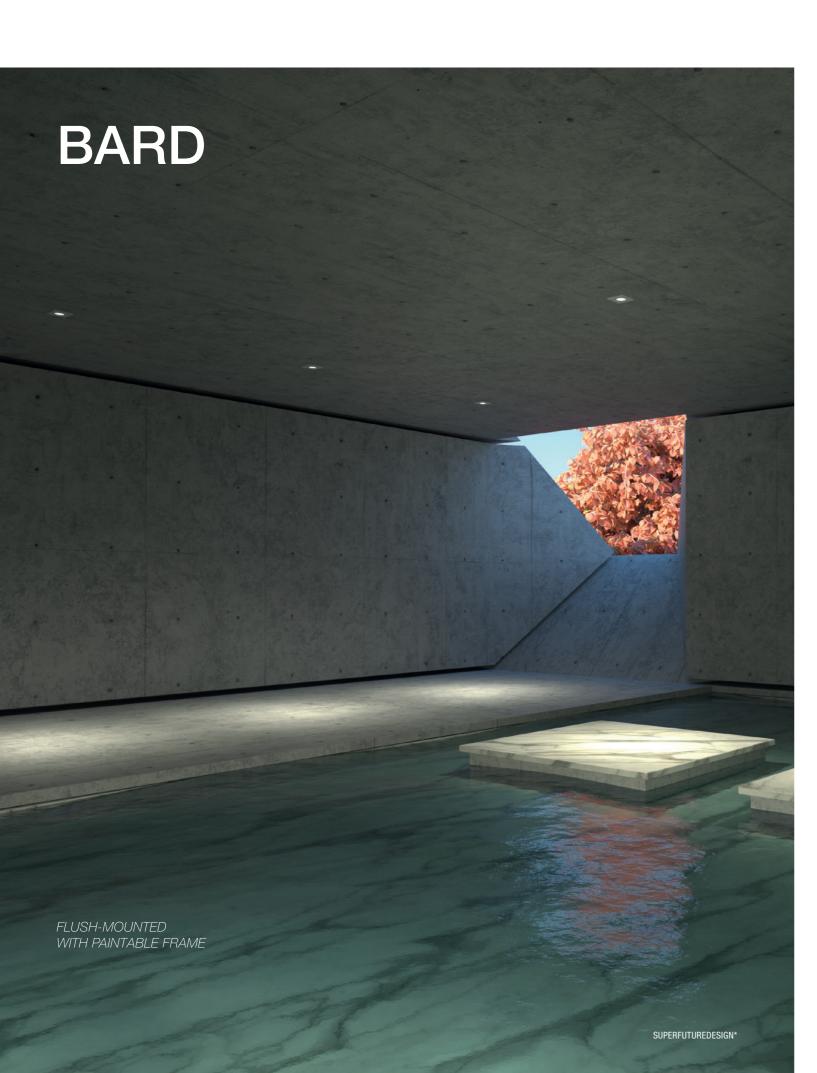

example of code composition

OTHER AVAILABLE CODES

light color

2700K 3000K

BU1004.00 4 R 40 M 27 WD

4000K (on request)

27

TECHNICAL FEATURES

Code BU1004.00 XX Downlight 90° Type Material 00: Coral® 1.76 lbs Weight Mounting Ceiling recessed IP rating IP20 Control gear Constant current electronic driver (not included) Cut out for plasterboard Ø 3.35 in Lamp type LED 500 mA **⊒**D Vf: 18 VDC Lamp wattage $1 \times 9W$ 1 × 1125 lm - 3000K Luminous efficacy Light distribution Wide beam 40° Fitting White 3000K White 2700K | 4000K (on request) Light color Ø 1.97 in Light hole Voltage connection By driver (optional) CRI 90 On request available dimmable PUSH or DALI. Note



79 Trenton Avenue Frenchtown, NJ 08825

ww.designplan.com

Tel: (908) 996-7710 Fax: (908) 996-7042

 $^{^{\}star}$ The absorption capacity per ft³ calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²