

# BASIC ROUND


HIGH PERFORMANCES  
FOR BEST BUDGET

SUPERFUTUREDESIGN\*

Indoor Recessed



Basic Round

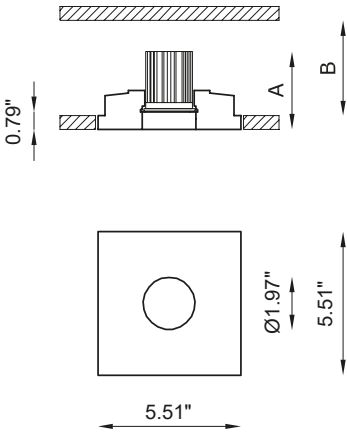

## OTHER AVAILABLE CODES

BU3123.Z.27.00	<i>lens</i>	40°
	<i>light color</i>	2700K
BU3123.Z.40.00	<i>lens</i>	40°
	<i>light color</i>	4000K

## TECHNICAL FEATURES

Code	BU3123.Z.00
Type	Downlight 90°
Material	00: Coral®
Weight	1.76 lbs
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Remote constant current electronic driver (not included)
Dimensions	A: 3.15 in; B: 3.94 in
Cut out for plasterboard	5.91 × 5.91 in
Lamp type	LED 500mA
	Vf: 18 VDC
Lamp wattage	1 × 9W
Luminous efficacy	1 × 1125 lm - 3000K
Light distribution	Wide beam 40°
Fitting	-
Light color	White 3000K
Light hole	Ø 1.97 in
Voltage connection	By driver (optional)
CRI	>90
Note	Other available light colours: 2700K, 4000K.

## OPTIONAL

Brick box	cod. BR3123LT	cod. BR3121LT	cod. BR3122LT
-----------	---------------	---------------	---------------

designplan®


79 Trenton Avenue  
Frenchtown, NJ 08825

[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042



Basic Round Dim To Warm

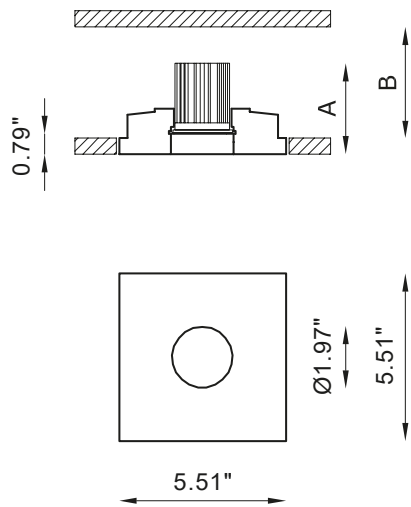

TECHNICAL FEATURES

Code	BU3125.00 4 R 40 M 98 WD
Type	Downlight 90°
Material	00: Coral®
Weight	1.76 lbs
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Remote ON/OFF driver** (not included)
Dimensions	A: 3.15 in; B: 3.94 in
Cut out for plasterboard	5.91 × 5.91 in
Lamp type	LED 350mA
Lamp wattage	1 × 6W
Luminous efficacy	1 × 600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°
Fitting	-
Light color	Dimming range 1800/3000K
Light hole	Ø 1.97 in
Voltage connection	By driver (optional)
CRI	>90
Note	**Basic Round Dim To Warm requires dimming: amplitude (AM) dim to warm wide range input voltage.

OPTIONAL

Brick box	cod. BR3125LT
-----------	---------------

