


# BASIC SQUARE



Basic Square




Indoor Recessed

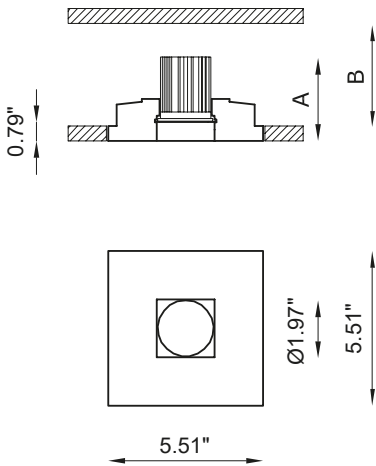

## OTHER AVAILABLE CODES

|                |                    |       |
|----------------|--------------------|-------|
| BU3113.Z.27.00 | <i>lens</i>        | 40°   |
|                | <i>light color</i> | 2700K |
| BU3113.Z.40.00 | <i>lens</i>        | 40°   |
|                | <i>light color</i> | 4000K |

## TECHNICAL FEATURES

|                          |                                                                                                               |
|--------------------------|---------------------------------------------------------------------------------------------------------------|
| Code                     | BU3113.Z.00                                                                                                   |
| Type                     | Downlight 90°<br>          |
| Material                 | 00: Coral®                                                                                                    |
| Weight                   | 1.76 lbs                                                                                                      |
| Mounting                 | Ceiling recessed                                                                                              |
| IP rating                | IP20                                                                                                          |
| Control gear             | Remote constant current electronic driver (not included)                                                      |
| Dimensions               | A: 3.15 in; B: 3.94 in                                                                                        |
| Cut out for plasterboard | 5.91 × 5.91 in                                                                                                |
| Lamp type                | LED 500mA<br> Vf: 18 VDC |
| Lamp wattage             | 1 × 9W                                                                                                        |
| Luminous efficacy        | 1 × 1125 lm - 3000K                                                                                           |
| Light distribution       | Wide beam 40°                                                                                                 |
| Fitting                  | -                                                                                                             |
| Light color              | White 3000K                                                                                                   |
| Light hole               | 1.97 × 1.97 in                                                                                                |
| Voltage connection       | By driver (optional)                                                                                          |
| CRI                      | >90                                                                                                           |
| Note                     | Other available light colours:<br>2700K,<br>4000K.                                                            |

## OPTIONAL

|           |               |
|-----------|---------------|
| Brick box | cod. BR3113LT |
|-----------|---------------|

HIGH PERFORMANCES  
FOR BEST BUDGET

designplan® 

79 Trenton Avenue  
Frenchtown, NJ 08825


[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042



SUPERFUTUREDESIGN\*

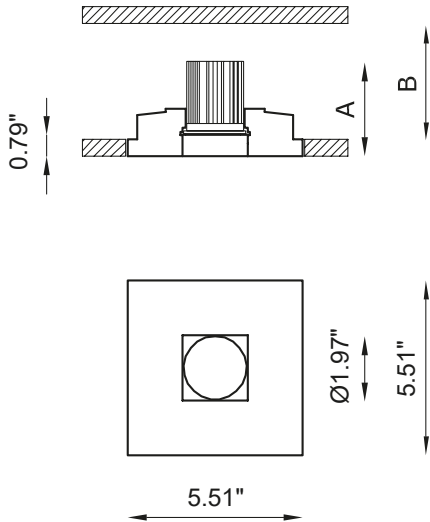

Basic Square Dim To Warm



TECHNICAL FEATURES

|                          |                                                                                                   |
|--------------------------|---------------------------------------------------------------------------------------------------|
| Code                     | BU3115.00 4 R 40 M 98 WD                                                                          |
| Type                     | Downlight 90°                                                                                     |
|                          |  00: Coral®      |
| Material                 |                                                                                                   |
| Weight                   | 1.76 lbs                                                                                          |
| Mounting                 | Ceiling recessed                                                                                  |
| IP rating                | IP20                                                                                              |
| Control gear             | Remote ON/OFF driver** (not included)                                                             |
| Dimensions               | A: 3.15 in; B: 3.94 in                                                                            |
| Cut out for plasterboard | 5.91 × 5.91 in                                                                                    |
| Lamp type                | LED 350mA                                                                                         |
|                          |  Vf: 17 VDC    |
| Lamp wattage             | 1 × 6W                                                                                            |
| Luminous efficacy        | 1 × 600 lm (from 1800K up to 3000K)                                                               |
| Light distribution       | Wide beam 40°                                                                                     |
| Fitting                  | -                                                                                                 |
| Light color              | Dimming range 1800/3000K                                                                          |
| Light hole               | 1.97 × 1.97 in                                                                                    |
| Voltage connection       | By driver (optional)                                                                              |
| CRI                      | >90                                                                                               |
| Note                     | **Basic Square Dim To Warm requires dimming: amplitude (AM) dim to warm wide range input voltage. |

OPTIONAL

|           |               |
|-----------|---------------|
| Brick box | cod. BR3115LT |
|-----------|---------------|

