


BERICA 1.2

Berica is a family of single- or double-beam, indoor, wall-mounted fixtures that can discreetly blend into the wall on which it is installed - or can disappear completely if the primer finish is chosen. Berica is available in 3 sizes and 3 different styles of cover - convex, flat and concave. Berica 1.2 is a convex, 24.4" version available in 3 color temperatures with an integral power supply.


TECHNICAL DATA

Wattage	27W per beam
Power Supply	Integral 120-277VAC (0-10V Dimming)
Construction	Body/Cover: Anticorodal Aluminum
CCT	2700K, 3000K, 4000K
CRI	>90
Delivered Lumens	2624 lm per beam (3000K, 43°x96°)
Efficacy	97.2 lm/W per beam (3000K, 43°x96°)
Optics	4 Standard, see below
Finishes	5 Standard, see below
Fixture Dimensions	24.41" l x 4.72" w x 1.30" h
Fixture Weight	3.53 lbs
LED Source	64 Mid Power LEDs per beam
Lumen Maintenance	L80, B10 >50,000hrs (Ta 25°C)
Color Consistency	3-step MacAdam
Operating Temp.	32°F to +113°F
IP Rating	IP40



ADA Compliant

Fixture Dimensions

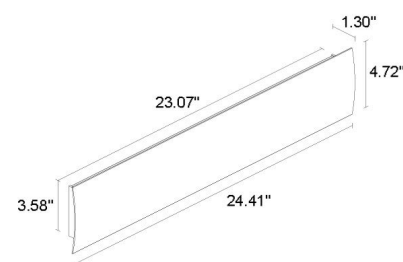

ORDERING INFORMATION

Example: BB121010005KW8.

	1000			
Model #	CRI	CCT	Optics	Finish
BB1210 - Double Beam BB1211 - Single Beam	1000 - CRI>90	F - 2700K 5 - 3000K 9 - 4000K	LW - 43°x96° KW - 54°x90° 0A - Asymmetrical 0D - Diffuse	Z - Antique Bronze 6 - Antique White K - Matte Alum. Gray 8 - Primer B - White


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 1799.1

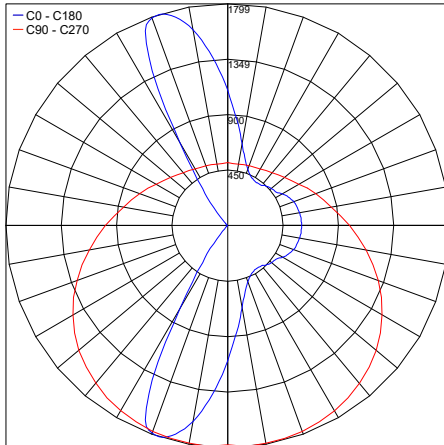


PHOTOMETRIC FILENAME : BERICA 1.2 Double A [3000K 54W 120-277VAC].IES

Maximum Candela = 1189.9

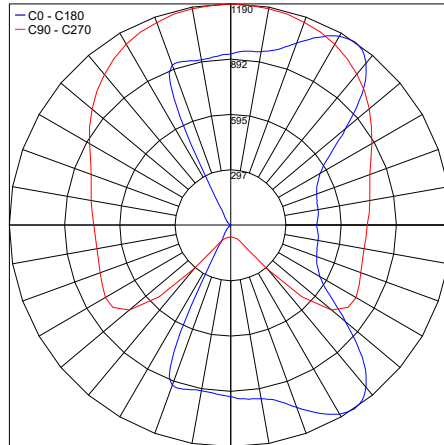


PHOTOMETRIC FILENAME : BERICA 1.2 Double D [3000K 54W 120-277VAC].IES

Maximum Candela = 1497.2

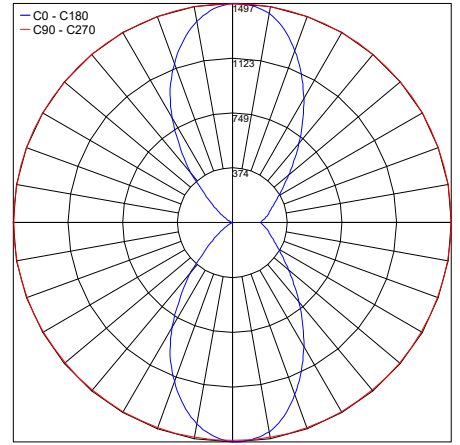


PHOTOMETRIC FILENAME : BERICA 1.2 Double K 54°X90° [3000K 54W 120-277VAC].IES

Maximum Candela = 1782.7

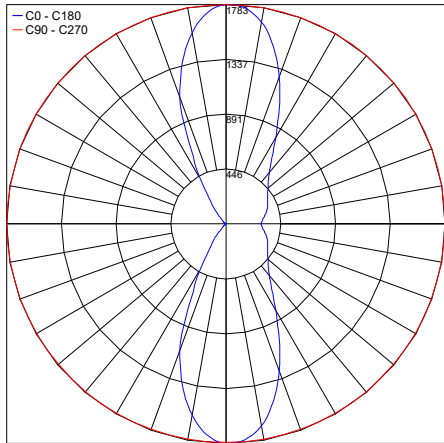


PHOTOMETRIC FILENAME : BERICA 1.2 Double L 43°X96° [3000K 54W 120-277VAC].IES

Maximum Candela = 1796.3

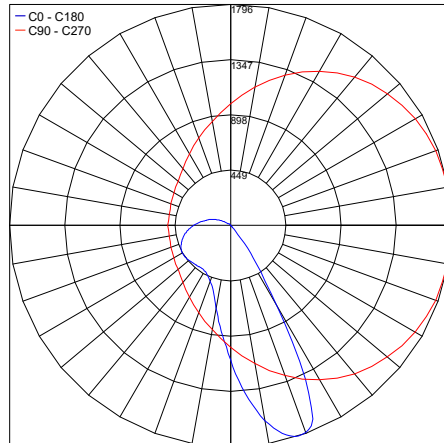


PHOTOMETRIC FILENAME : BERICA_IN_1.2_Single_A_3000K_27W.IES

Maximum Candela = 1187.9

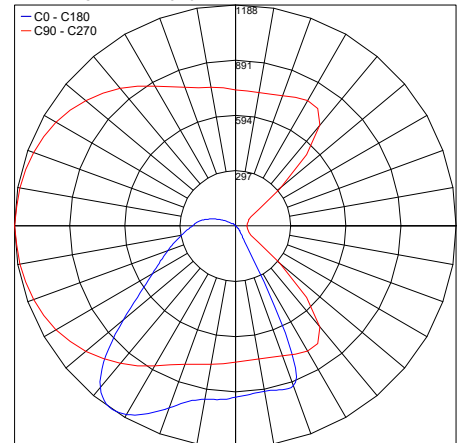


PHOTOMETRIC FILENAME : BERICA_IN_1.2_Single_D_3000K_27W.IES

Maximum Candela = 1497.2

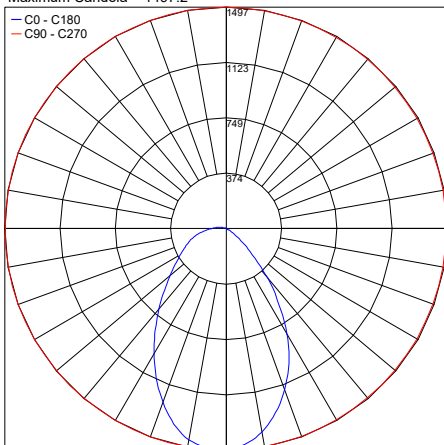

PHOTOMETRIC FILENAME : BERICA_IN_1.2_Single_K_54X90_3000K_27W.IES

Maximum Candela = 1779.9

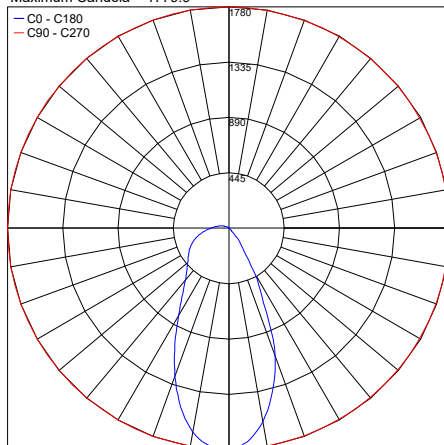

PHOTOMETRIC FILENAME : BERICA_IN_1.2_Single_L_43X96_3000K_27W.IES

Job Name/Date:

Fixture Type Designation: