



Berica is a family of double beam, indoor, wall-mounted fixtures that can discreetly blend into the wall on which it is installed - or can disappear completely if the primer finish is chosen. Berica is available in 3 sizes and 3 different styles of cover - convex, flat and concave. Berica 2.0 is a flat 4.7" version available in 3 color temperatures using a remote power supply.

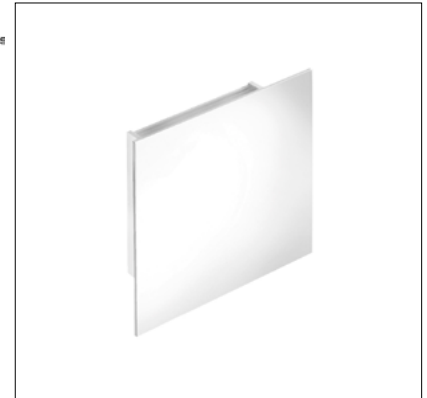

ADA Compliant

Fixture Dimensions



## TECHNICAL DATA

|                           |   |
|---------------------------|---|
| <b>Wattage</b>            | 6W  |
| <b>Power Supply</b>       | Integral 120VAC & 277VAC - 0-10V Dimming OR<br>Integral 120VAC Only - Triac and ELV Dimming |
| <b>Construction</b>       | Body/Cover: Anticorodal Aluminum  |
| <b>CCT</b>                | 2700K, 3000K, 4000K   |
| <b>CRI</b>                | >90   |
| <b>Delivered Lumens</b>   | 335 lm per beam (3000K, 45°x96°)  |
| <b>Efficacy</b>           | 41.9 lm/W per beam (3000K, 45°x96°)   |
| <b>Optics</b>             | 4 Standard, see below   |
| <b>Finishes</b>           | 5 Standard, see below   |
| <b>Fixture Dimensions</b> | 4.72" l x 4.72" w x 1.18" h   |
| <b>Fixture Weight</b>     | 0.77 lbs  |
| <b>LED Source</b>         | 16 Mid Power LEDs   |
| <b>Lumen Maintenance</b>  | L80, B10 >50,000hrs (Ta 25°C)   |
| <b>Color Consistency</b>  | 3-step MacAdam  |
| <b>Operating Temp.</b>    | 32°F to +113°F  |
| <b>IP Rating</b>          | IP40  |

## ORDERING INFORMATION

Example: **BB201010005KW8**.

|                  |                         |  |   |  |
|------------------|-------------------------|--|---|--|
| <b>BB2010</b>    | <b>1000</b>             |  |   |  |
| <b>Model No.</b> | <b>CRI</b>              | <b>CCT</b>   | <b>Optics</b>   | <b>Finish</b>  |
| <b>BB2010</b>    | <b>1000 - CRI&gt;90</b> | <b>F - 2700K</b><br><b>5 - 3000K</b><br><b>9 - 4000K</b> | <b>LW - 45°x96°</b><br><b>KW - 57°x90°</b><br><b>0A - Asymmetrical</b><br><b>0D - Diffuse</b> | <b>Z - Antique Bronze</b><br><b>6 - Antique White</b><br><b>K - Matte Aluminum Gray</b><br><b>8 - Primer</b><br><b>B - White</b> |

Job Name/Date:


Fixture Type Designation:

## PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 225.3


— C0 - C180  
— C90 - C270

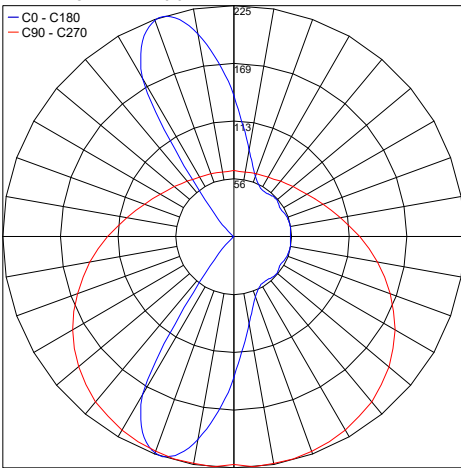

PHOTOMETRIC FILENAME : BERICA 2.0 A [3000K 8W].IES

Maximum Candela = 153.5


— C0 - C180  
— C90 - C270

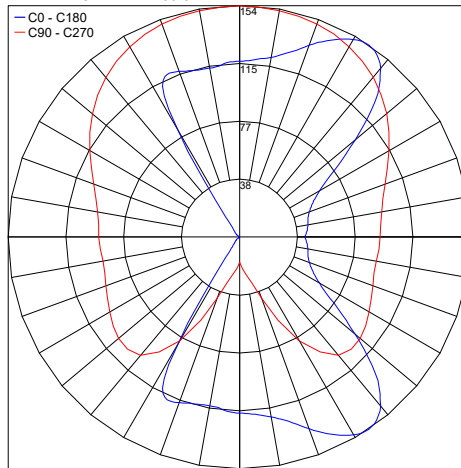

PHOTOMETRIC FILENAME : BERICA 2.0 D [3000K 8W].IES

Maximum Candela = 190.7


— C0 - C180  
— C90 - C270

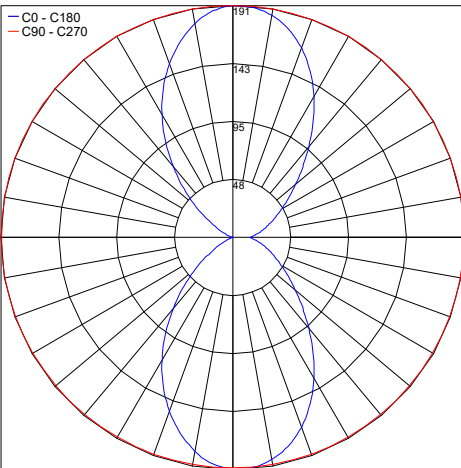

PHOTOMETRIC FILENAME : BERICA 2.0 K 57°X90° [3000K 8W].IES

Maximum Candela = 224.9

— C0 - C180  
— C90 - C270

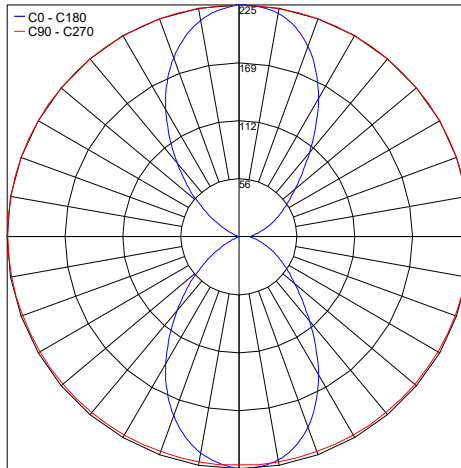

PHOTOMETRIC FILENAME : BERICA 2.0 L 45°X96° [3000K 8W].IES

Job Name/Date:

Fixture Type Designation: