



# BERICA 2.0

Berica is a family of single- or double-beam, indoor, wall-mounted fixtures that can discreetly blend into the wall on which it is installed - or can disappear completely if the primer finish is chosen. Berica is available in 3 sizes and 3 different styles of cover - convex, flat and concave. Berica 2.0 is a flat 4.7" version available in 3 color temperatures and 5 standard finishes.

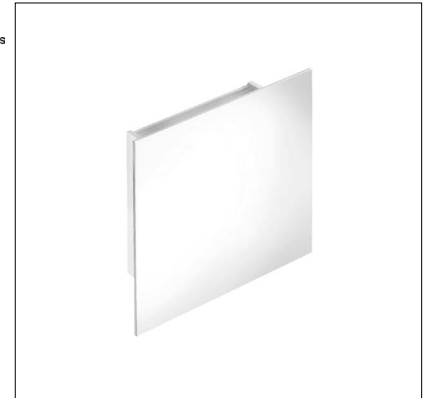

ADA Compliant

Fixture Dimensions



## TECHNICAL DATA

<b>Wattage</b>	6W per beam
<b>Power Supply</b>	Integral 120VAC & 277VAC - 0-10V Dimming OR Integral 120VAC Only - Triac and ELV Dimming
<b>Construction</b>	Body/Cover: Anticorodal Aluminum
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>90
<b>Delivered Lumens</b>	335 lm per beam (3000K, 45°x96°)
<b>Efficacy</b>	55.8 lm/W per beam (3000K, 45°x96°)
<b>Optics</b>	4 Standard, see below
<b>Finishes</b>	5 Standard, see below
<b>Fixture Dimensions</b>	4.72" l x 4.72" w x 1.18" h
<b>Fixture Weight</b>	0.77 lbs
<b>LED Source</b>	8 Mid Power LEDs
<b>Lumen Maintenance</b>	L80, B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	3-step MacAdam
<b>Operating Temp.</b>	32°F to +113°F
<b>IP Rating</b>	IP40

## ORDERING INFORMATION

Example: **BB201010005KW8**.

	<b>1000</b>			
<b>Model No.</b>	<b>CRI</b>	<b>CCT</b>	<b>Optics</b>	<b>Finish</b>
<b>BB2010</b> - Double Beam	<b>1000</b> - CRI>90	<b>F</b> - 2700K	<b>LW</b> - 45°x96°	<b>Z</b> - Antique Bronze
<b>BB2011</b> - Single Beam		<b>5</b> - 3000K	<b>KW</b> - 57°x90°	<b>6</b> - Antique White
		<b>9</b> - 4000K	<b>0A</b> - Asymmetrical	<b>K</b> - Matte Aluminum Gray
			<b>0D</b> - Diffuse	<b>8</b> - Primer
				<b>B</b> - White


Job Name/Date:

Fixture Type Designation:

## PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 225.3

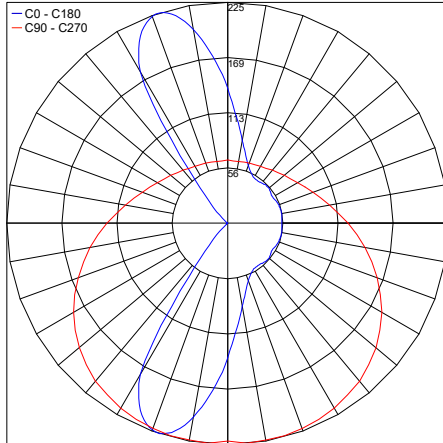


PHOTOMETRIC FILENAME : BERICA 2.0 Double A [3000K 8W].IES

Maximum Candela = 153.5

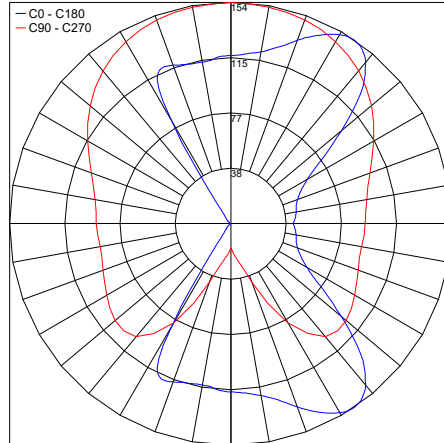


PHOTOMETRIC FILENAME : BERICA 2.0 Double D [3000K 8W].IES

Maximum Candela = 190.7

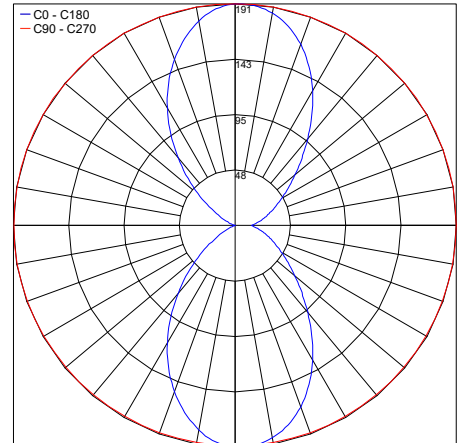


PHOTOMETRIC FILENAME : BERICA 2.0 Double K 57°X90° [3000K 8W].IES

Maximum Candela = 224.9

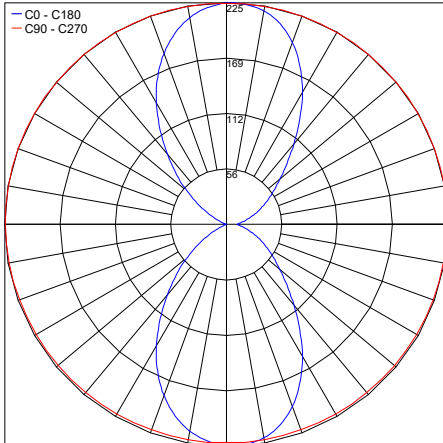


PHOTOMETRIC FILENAME : BERICA 2.0 Double L 45°X96° [3000K 8W].IES

Maximum Candela = 225.7

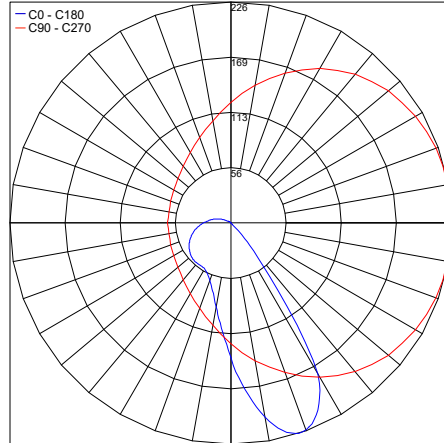


PHOTOMETRIC FILENAME : BERICA\_IN\_2.0\_Single\_A\_3000K\_5W.IES

Maximum Candela = 153.5

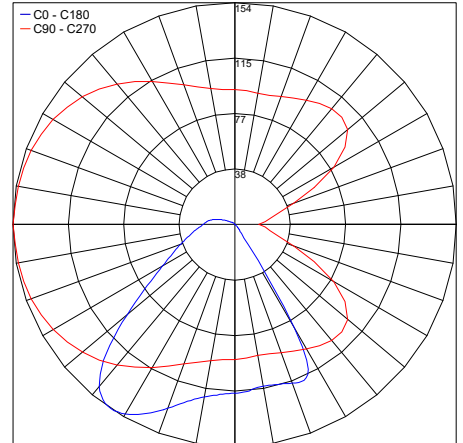


PHOTOMETRIC FILENAME : BERICA\_IN\_2.0\_Single\_D\_3000K\_5W.IES

Maximum Candela = 190.4

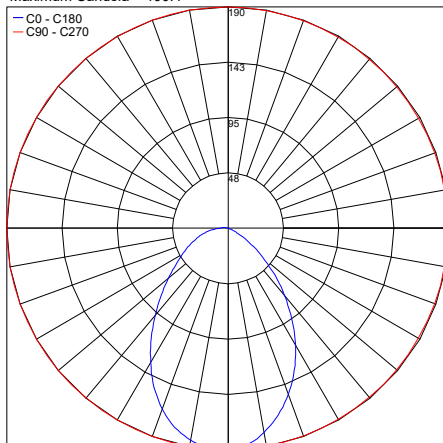

PHOTOMETRIC FILENAME : BERICA\_IN\_2.0\_Single\_K\_57X90\_3000K\_5W.IES

Maximum Candela = 225.2

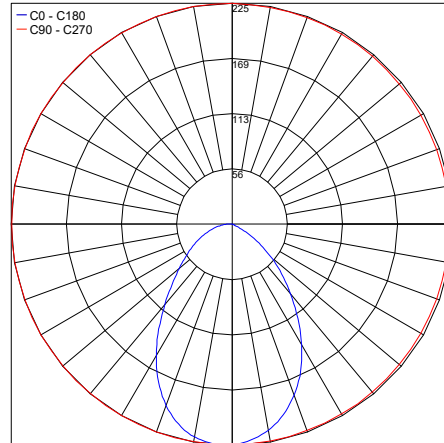

PHOTOMETRIC FILENAME : BERICA\_IN\_2.0\_Single\_L\_45X96\_3000K\_5W.IES

Job Name/Date:

Fixture Type Designation: