


BERICA 2.1

Berica is a family of single- or double-beam, indoor, wall-mounted fixtures that can discreetly blend into the wall on which it is installed - or can disappear completely if the primer finish is chosen. Berica is available in 3 sizes and 3 different styles of cover - convex, flat and concave. Berica 2.1 is a flat, 13.4" version available in 3 color temperatures with an integral power supply.



ADA Compliant

Fixture Dimensions

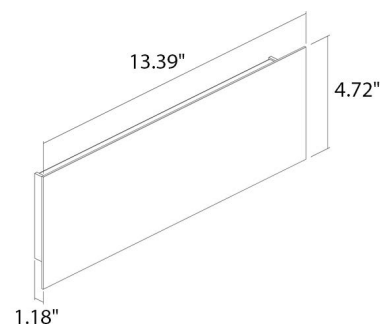

TECHNICAL DATA

Wattage	15W per beam
Power Supply	Integral 120VAC & 277VAC - 0-10V Dimming Integral 120VAC Only - Triac and ELV Dimming
Construction	Body/Cover: Anticorodal Aluminum
CCT	2700K, 3000K, 4000K
CRI	>90
Delivered Lumens	1340 lm per beam (3000K, 45°x96°)
Efficacy	89.3 lm/W per beam (3000K, 45°x96°)
Optics	4 Standard, see below
Finishes	5 Standard, see below
Fixture Dimensions	13.39" l x 4.72" w x 1.18" h
Fixture Weight	1.98 lbs
LED Source	32 Mid Power LEDs per beam
Lumen Maintenance	L80, B10 >50,000hrs (Ta 25°C)
Color Consistency	3-step MacAdam
Operating Temp.	32°F to +113°F
IP Rating	IP40

ORDERING INFORMATION

Example: BB211010005KW8-1.

	1000				-	
Model #	CRI	CCT	Optics	Finish	Driver	
BB2110 - Double Beam	1000 - CRI>90	F - 2700K	LW - 45°x96°	Z - Antique Bronze	1 - Integral 120VAC & 277VAC - 0-10V Dimming 2 - Integral 120VAC Only - Triac and ELV Dimming	
BB2111 - Single Beam		5 - 3000K	KW - 57°x90°	6 - Antique White		
		9 - 4000K	0A - Asymmetrical 0D - Diffuse	K - Matte Alum. Gray 8 - Primer B - White		


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 1658.3

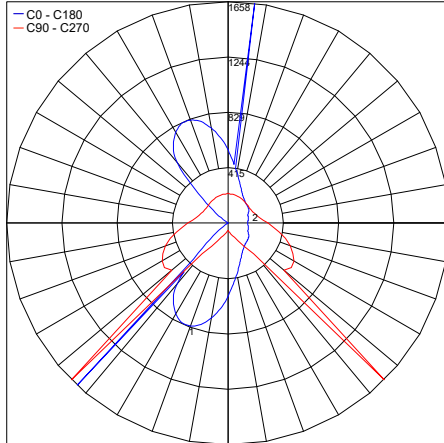


PHOTOMETRIC FILENAME : BERICA 2.1 Double A [3000K 27W 120-277VAC].IES

Maximum Candela = 614.1

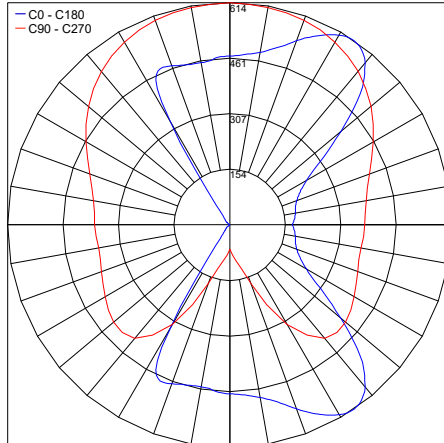


PHOTOMETRIC FILENAME : BERICA 2.1 Double D [3000K 27W 120-277VAC].IES

Maximum Candela = 762.7

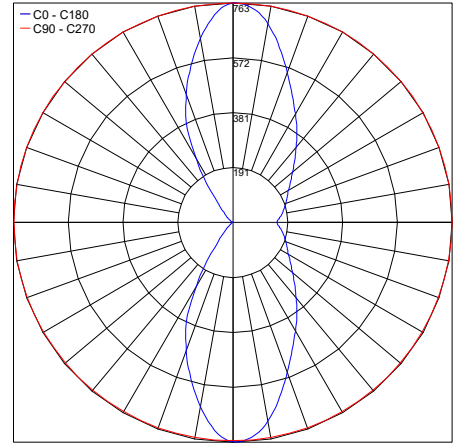


PHOTOMETRIC FILENAME : BERICA 2.1 Double K 57°X90° [3000K 27W 120-277VAC].IES

Maximum Candela = 1735.5

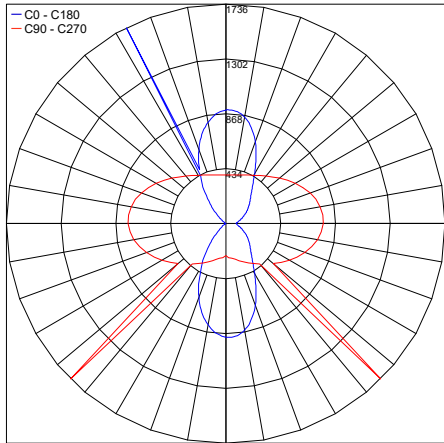


PHOTOMETRIC FILENAME : BERICA 2.1 Double L 45°X96° [3000K 27W 120-277VAC].IES

Maximum Candela = 902.7

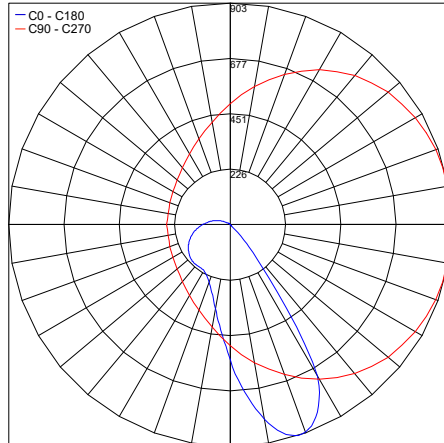


PHOTOMETRIC FILENAME : BERICA_IN_2.1_Single_A_3000K_15W.IES

Maximum Candela = 614

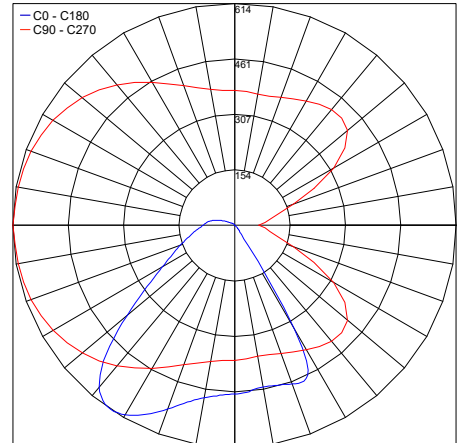


PHOTOMETRIC FILENAME : BERICA_IN_2.1_Single_D_3000K_15W.IES

Maximum Candela = 761.5

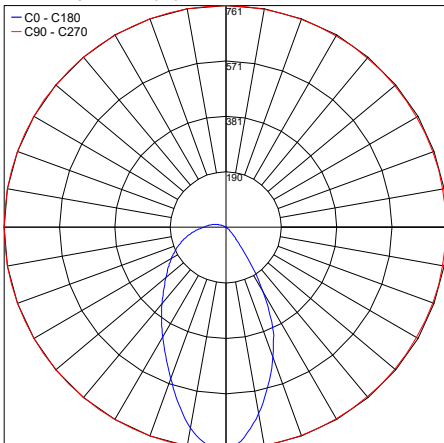

PHOTOMETRIC FILENAME : BERICA_IN_2.1_Single_K_57X90_3000K_15W.IES

Maximum Candela = 900.8

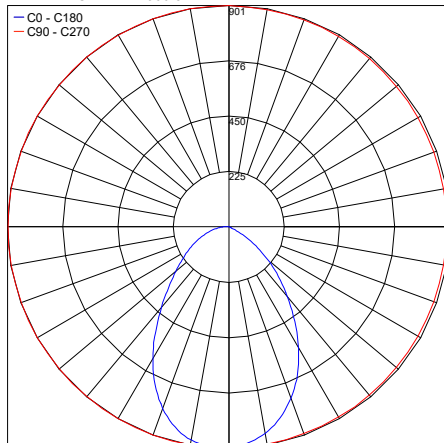

PHOTOMETRIC FILENAME : BERICA_IN_2.1_Single_L_45X96_3000K_15W.IES

Job Name/Date:

Fixture Type Designation: