



Designed for visual comfort, the Bitpop C family of low-glare luminaires is designed for ceiling surface mount applications. Ideal for both commercial and residential installations.

TECHNICAL DATA

Wattage / Input	17W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Aluminum Alloy EN AW 6060 Trim: Steel Cable Length: 4.92' standard
CCT	2700K, 3000K, 4000K
CRI	2700K, 3000K: CRI >90 4000K: CRI >80
Delivered Lumens	992 lm (3000K, 30°, CRI 90)
Efficacy	58 lm/W
Optics	17°, 30°, 42°, 17°x45°
Finishes	2 Standard, Custom RAL (see below)
Fixture Dimensions	3.94" x 3.94" x 3.94" h
Aperture	1.25" sq. x 4 cell
Fixture Weight	1.54 lbs
LED Source	4 High-Intensity Power LEDs
Lumen Maintenance	L85, B10>50,000hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	+32°F to +113°F
IP Rating	IP40



Fixture Dimensions

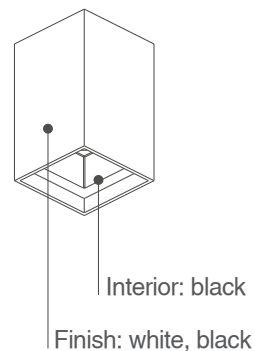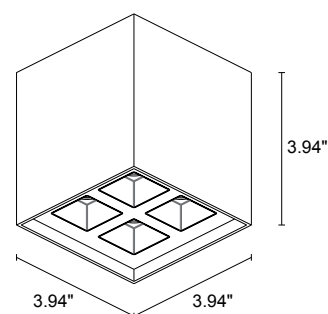

ORDERING INFORMATION

Example: BC221009SB0. Power Supplies ordered separately.

BC2210			
Model No.	CCT	Optics	Finish
BC2210	1F - 2700K (CRI>90) 15 - 3000K (CRI>90) 09 - 4000K (CRI>80)	S - 17° F - 30° L - 42° W - 17°x45°	B0 - White - Black N0 - Black - Black C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00465-P	0-10V Dimming to 1%	120-277VAC to 350mA, 20W, Class 2	1-1
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-1
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-1

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00179	L3DA3W / L3DAE	L3DA	100%-1%	Hi-Lume™ 1% 3-Wire or 1% EcoSystem™ LED Driver	120-277VAC to 350mA, 19W, Class 2	1-1

For other power supply options consult factory.


PHOTOMETRIC DATA

Note all Photometry is 3000K, CRI 90


S - 17°

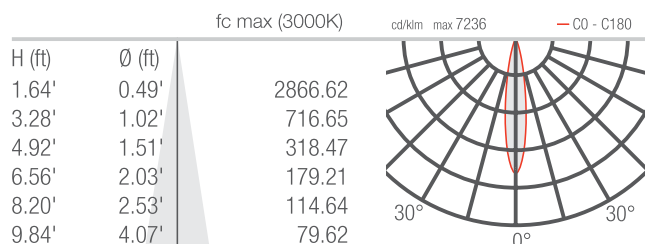


F - 30°

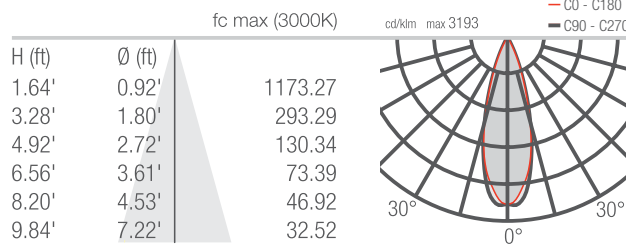

L - 42°

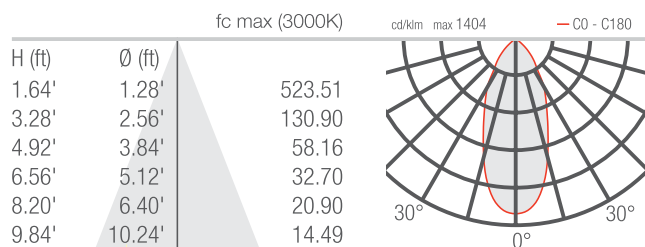

W - 17°x45°

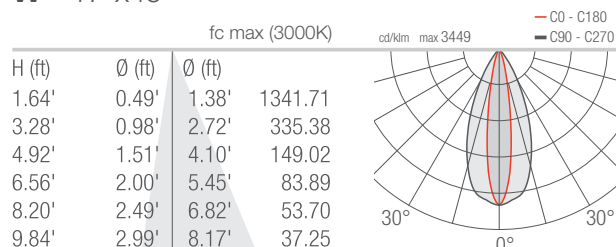

Job Name/Date:

Fixture Type Designation: