

BITPOP C

INDOOR CEILING MOUNTED FOR OFFICES AND WORK SPACES

2700K 3000K 4000K



1 OPTICS UNIT




**4 OPTICS
IN A SQUARE**



**4 OPTICS
IN A LINE**

CEILING MOUNTED



narrow medium wide elliptical



BITPOP C 1.0
6.5W 24VDC
ON/OFF



BITPOP C 2.2
17W 350mA
ON/OFF, DALI, 0-10V





BITPOP C 4.1
17W 350mA
ON/OFF, DALI, 0-10V

RECESSED

BITPOP

✓
BITPOP C 1.0
 4000K, 6.5W, 17°, black

Project by / Studio Carella + Salvato
 Executed by / ing. Giuseppe Occulto
 Photo by / Alessio Tamborini
 LEX law firm, Foggia, Italy




BITPOP C 1.0

CB    0.66 lbs IP40



POWER / Model CODE

6.5W 24VDC

BC1000  **B 0** White - Black

BC1000  **N 0** Black - Black

LED COLOR

1F - 2700K CRI >90

15 - 3000K CRI >90

09 - 4000K CRI 80

OPTICS

S - 17°

F - 30°

L - 42°

W - 17°x45°

CONTROL SYSTEM

LUMEN OUTPUT AT SOURCE

480 lm (3000K)

DELIVERED LUMEN OUTPUT

335 lm (3000K, 30°)

NO. AND TYPE OF LED

1 high-intensity power LED
 3-step MacAdam, 50000h L85 B10 (Ta 25°C)

MATERIAL

body in aluminum
 trim in steel

POWER SUPPLY UNIT

Remote power supply required, not included

POWER CABLES

includes 4.92 ft PVC cable
 FROR 2x0.35 Ø0.14 in

MOUNTING

surface mounted (ceiling)



FEATURES

UGR < 10 for the 17° and 30° optics

NOTES

recessed version: Bitpop 1.0, Casambi-compatible version, controllable with the Casambi app, available on request





17°x45° optics



BITPOP C 2.2

CB



1.54 lbs IP40



DALI PUSH 0-10V

17W 350mA

BC2210 ■ ■ B ■ White - Black

BC2210 ■ ■ N ■ Black - Black

■ **1F** - 2700K CRI >90
15 - 3000K CRI >90
09 - 4000K CRI 80

■ **S** - 17°
F - 30°
L - 42°
W - 17°x45°

■ **O** - on/off
R - 0-10V + PUSH
D - DALI

1400 lm (3000K)

992 lm (3000K, 30°)

4 high-intensity power LEDs
 3-step MacAdam, 50000h L85 B10 (Ta 25°C)

body in aluminum
 trim in steel

Remote power supply required, not included

includes 0.98 ft cable

surface mounted (ceiling)

UGR < 10 for the 17° and 30° optics

recessed version: Bitpop 2.2, Casambi-compatible version, controllable with the Casambi app, available on request

BITPOP C 4.1

CB



1.54 lbs IP40



DALI PUSH 0-10V

17W 350mA

BC4110 ■ ■ B ■ White - Black

BC4110 ■ ■ N ■ Black - Black

■ **1F** - 2700K CRI >90
15 - 3000K CRI >90
09 - 4000K CRI 80

■ **S** - 17°
F - 30°
L - 42°
W - 17°x45°

■ **O** - on/off
R - 0-10V
D - DALI + PUSH

1400 lm (3000K)

992 lm (3000K, 30°)

4 high-intensity power LEDs
 3-step MacAdam, 50000h L85 B10 (Ta 25°C)

body in aluminum
 trim in steel

Remote power supply required, not included

includes 0.98 ft cable

surface mounted (ceiling)

UGR < 10 for the 17° and 30° optics

recessed version: Bitpop 4.1, Casambi-compatible version, controllable with the Casambi app, available on request



Black




White - Black




INDOOR CEILING MOUNTED

BITPOP C 1.0


S - 17°

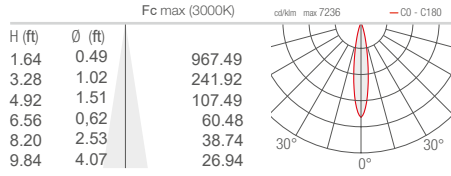


F - 30°

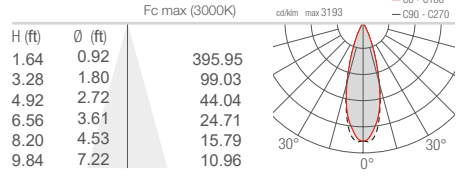

L - 42°

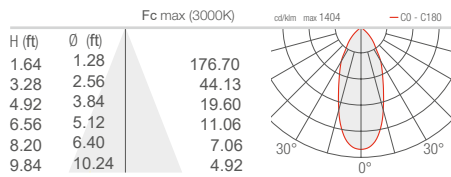


W - 17°x45°

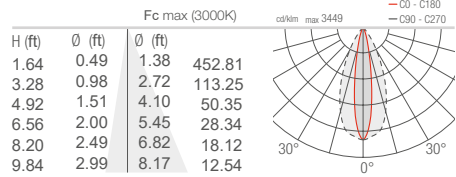


BITPOP C 2.2 4.1


S - 17°

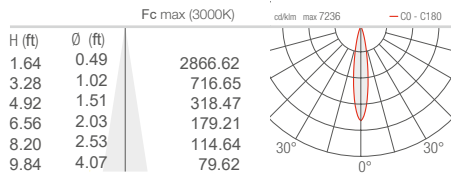

F - 30°

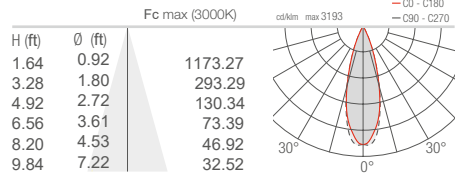

L - 42°

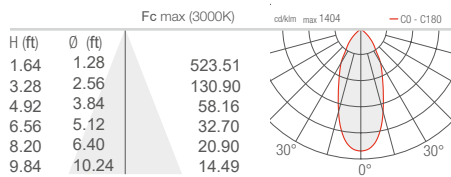

W - 17°x45°

