


INDOOR RECESSED DOWNLIGHTS FOR OFFICES AND WORK SPACES



narrow medium wide elliptical



2700K 3000K 4000K



RECESSED

1 OPTICS



BITPOP 1.0

7W 500mA
ON/OFF, DALI, 0-10V


2 OPTICS IN A LINE



BITPOP 2.1

12W 500mA
ON/OFF, DALI, 0-10V

4 OPTICS IN A SQUARE



BITPOP 2.2

24W 500mA
ON/OFF, DALI, 0-10V

4 OPTICS IN A LINE



BITPOP 4.1

24W 500mA
ON/OFF, DALI, 0-10V

8 OPTICS IN A LINE



BITPOP 8.1


48W 1000mA
ON/OFF, DALI, 0-10V

CEILING MOUNTED



BITPOP C

< **BITPOP 8.1**
3000K, 50W, 17°x45°, black
rebat installation






17°x45° optics



Outer casing for deep-set installation not included

BITPOP 1.0



POWER /MODEL CODE

7W 500mA

BP1010 **W** White – white interior

BP1010 **B** White – black interior

BP1010 **N** Black – black interior

LED COLOR

1F - 2700K CRI >90

1S - 3000K CRI >90

09 - 4000K CRI 80

OPTICS

S - 17°

F - 30°

L - 42°

W - 17°x45°

CONTROL SYSTEM

O - on/off

R - 0-10V + PUSH

D - DALI + PUSH

LUMEN OUTPUT AT SOURCE

480 lm (3000K)

DELIVERED LUMEN OUTPUT

335 lm (3000K, 30°)

NO. AND TYPE OF LED

1 high-intensity power LED
3-step MacAdam, 50000h L85 B10 (Ta 25°C)

MATERIAL

body in black-anodized aluminum
trim in steel

POWER SUPPLY UNIT

500mA: not included

POWER CABLES

includes 4.92 ft PVC cable FROR
2x0.35 Ø0.14 in

MOUNTING

recessed (ceiling: rebated or deep set)

ACCESSORIES

see accessories page

FEATURES

UGR < 10 for the 17° and 30° optics

NOTES

ceiling-mounted version: Bitpop C, Casambi-compatible version, controllable with the Casambi app, available on request



▼


BITPOP 2.2

3000K, 24W, 17°, white
rebated installation


BITPOP 2.2

3000K, 24W, 17°, white
deep-set installation with outer casing

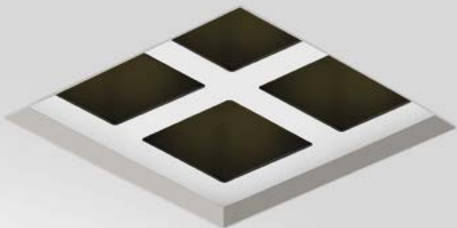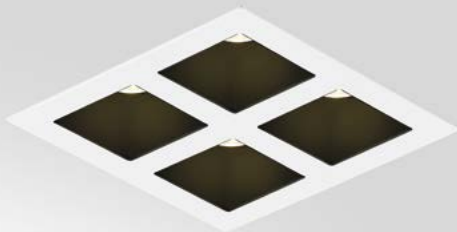

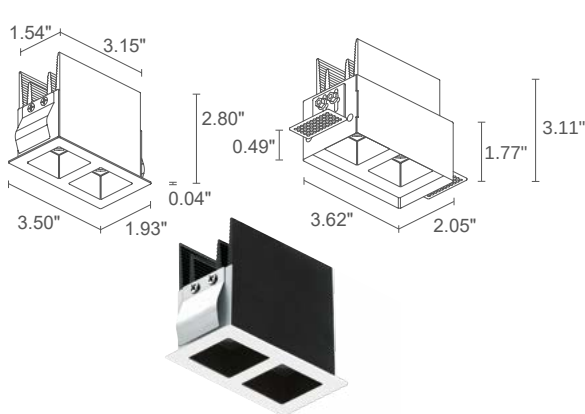

Outer casing for deep-set installation not included

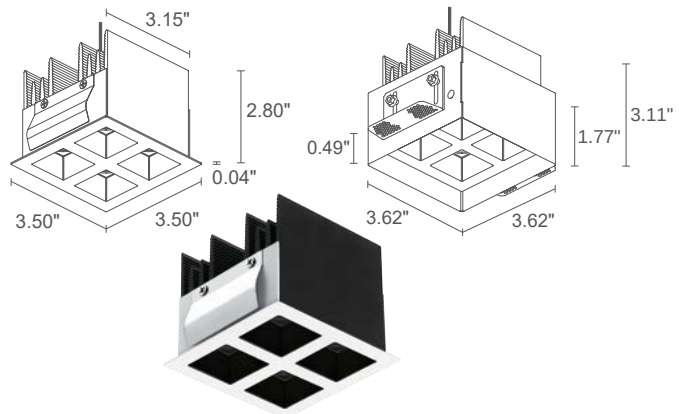

Outer casing for deep-set installation not included

BITPOP 2.1

6.7" x 3.54"
H 5.12" 3.27" x 1.65"



0.77 lbs IP40

DALI PUSH 0-10V

12W 500mA

BP2111 ■ ■ **W** ■ White – white interior
BP2111 ■ ■ **B** ■ White – black interior
BP2111 ■ ■ **N** ■ Black – black interior

BITPOP 2.2

6.7" x 6.7"
H 5.12" 3.23" x 3.23"



2.12 lbs IP40

DALI PUSH 0-10V

24W 500mA

BP2211 ■ ■ **W** ■ White – white interior
BP2211 ■ ■ **B** ■ White – black interior
BP2211 ■ ■ **N** ■ Black – black interior

■	1F - 2700K CRI >90 15 - 3000K CRI >90 09 - 4000K CRI 80
■	S - 17° F - 30° L - 42° W - 17°x45°
■	O - on/off R - 0-10V + PUSH D - DALI

■	1F - 2700K CRI >90 15 - 3000K CRI >90 09 - 4000K CRI 80
■	S - 17° F - 30° L - 42° W - 17°x45°
■	O - on/off R - 0-10V + PUSH D - DALI + PUSH

700 lm (3000K, 10W)
960 lm (3000K, 15W)

496 lm (3000K, 30°, 10W)
670 lm (3000K, 30°, 15W)

2 high-intensity power LEDs
3-step MacAdam, 50000h L85 B10 (Ta 25°C)

body in black-anodized aluminum
trim in steel

included and wired

includes 0.98 ft cable

recessed (ceiling: rebated or deep set)

see accessories page

UGR < 10 for the 17° and 30° optics

ceiling-mounted version: Bitpop C, Casambi-compatible version, controllable with the Casambi app, available on request

1400 lm (3000K, 18W)
1920 lm (3000K, 26W)

992 lm (3000K, 30°, 18W)
1340 lm (3000K, 30°, 26W)

4 high-intensity power LEDs
3-step MacAdam, 50000h L85 B10 (Ta 25°C)

body in black-anodized aluminum
trim in steel

included and wired

includes 0.98 ft cable


recessed (ceiling: rebated or deep set)

see accessories page

UGR < 10 for the 17° and 30° optics

ceiling-mounted version: Bitpop C, Casambi-compatible version, controllable with the Casambi app, available on request



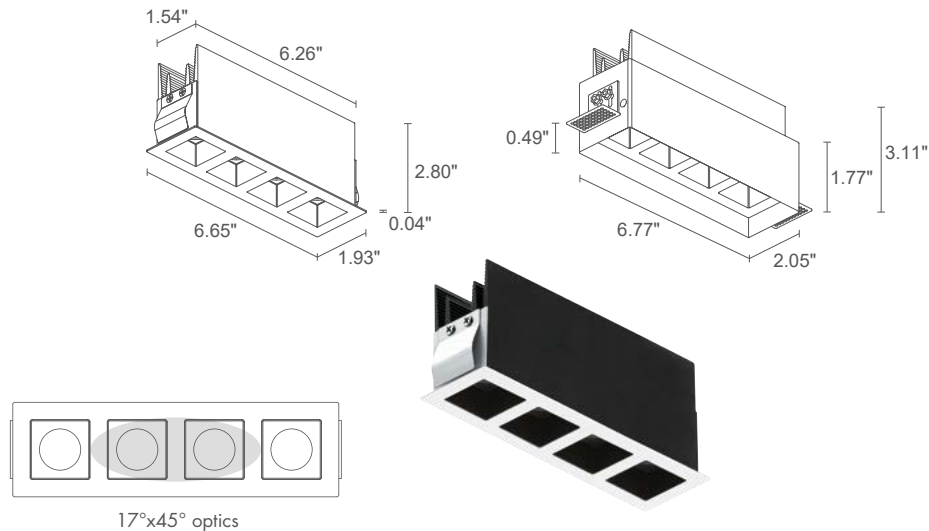

Outer casing for deep-set installation not included

BITPOP 4.1



CB



0.93 lbs IP40



DALI

PUSH

0-10V

POWER / MODEL CODE

24W 500mA

BP4111 **W** White – white interior

BP4111 **B** White – black interior

BP4111 **N** Black – black interior

LED COLOR

1F - 2700K CRI >90

15 - 3000K CRI >90

09 - 4000K CRI 80

OPTICS

S - 17°

F - 30°

L - 42°

W - 17°x45°

CONTROL SYSTEM

O - on/off

R - 0-10V + PUSH

D - DALI + PUSH

LUMEN OUTPUT AT SOURCE

1400 lm (3000K, 18W)

1920 lm (3000K, 26W)

DELIVERED LUMEN OUTPUT

992 lm (3000K, 30°, 18W)

1340 lm (3000K, 30°, 26W)

NO. AND TYPE OF LED

4 high-intensity power LEDs
3-step MacAdam, 50000h L85 B10 (Ta 25°C)

MATERIAL

body in black-anodized aluminum
trim in steel

POWER SUPPLY UNIT

included and wired

POWER CABLES

includes 0.98 ft cable

MOUNTING

recessed (ceiling: rebated or deep set)

ACCESSORIES

see accessories page

FEATURES

UGR < 10 for the 17° and 30° optics

NOTES

ceiling-mounted version: Bitpop C, Casambi-compatible version, controllable with the Casambi app, available on request

▼

BITPOP 4.1


3000K, 24W, 17°, white
rebated installation

BITPOP 4.1

3000K, 24W, 17°, white
deep-set installation with outer casing




Designplan | L&L Luce&Light

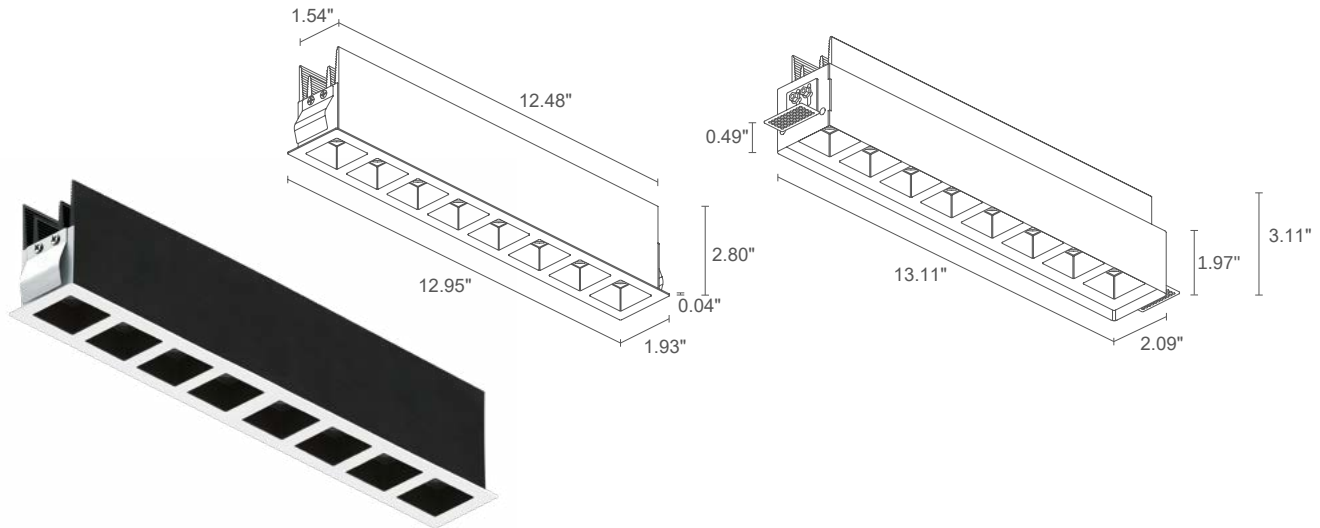

Outer casing for deep-set installation not included

BITPOP 8.1



CB



DALI PUSH 0-10V

48W 1000mA

- BP8111** ■ ■ **W** ■ White – white interior
- BP8111** ■ ■ **B** ■ White – black interior
- BP8111** ■ ■ **N** ■ Black – black interior

■	1F - 2700K CRI >90 15 - 3000K CRI >90 09 - 4000K CRI 80
■	S - 17° F - 30° L - 42° W - 17°x45°
■	O - on/off R - 0-10V + PUSH D - DALI + PUSH

2800 lm (3000K, 35W)
3840 lm (3000K, 50W)

1984 lm (3000K, 30°, 35W)
2680 lm (3000K, 30°, 50W)

8 high-intensity power LEDs
3-step MacAdam, 50000h L85 B10 (Ta 25°C)

body in black-anodized aluminum
trim in steel

included and wired

includes 0.98 ft cable

recessed (ceiling: rebated or deep set)

see accessories page

UGR < 10 for the 17° and 30° optics


ceiling-mounted version: Bitpop C, Casambi-compatible version, controllable with the Casambi app, available on request






ACCESSORIES

ACCESSORIES FOR INSTALLATION



WC8703 - White
WC8703N - Black
Outer casing for deep-set installation in plasterboard ceilings (Bitpop 1.0)



WC8713 - White
WC8713N - Black
Outer casing for deep-set installation in plasterboard ceilings (Bitpop 2.1)




WC8704 - White
WC8704N - Black
Outer casing for deep-set installation in plasterboard ceilings (Bitpop 2.2)




WC8705 - White
WC8705N - Black
Outer casing for deep-set installation in plasterboard ceilings (Bitpop 4.1)




WC8710 - White
WC8710N - Black
Outer casing for deep-set installation in plasterboard ceilings (Bitpop 8.1)

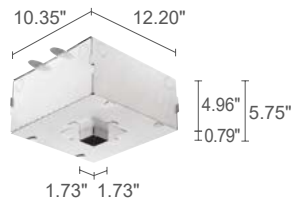


WC8700
Outer casing for rebated installation in solid ceilings (Bitpop 1.0)

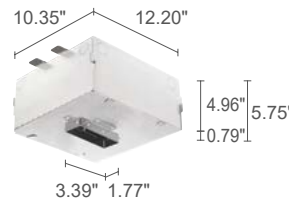


WC8712
Outer casing for rebated installation in solid ceilings (Bitpop 2.1)

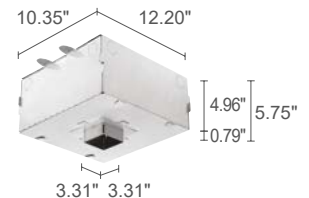

WC8701
Outer casing for rebated installation in solid ceilings (Bitpop 2.2)

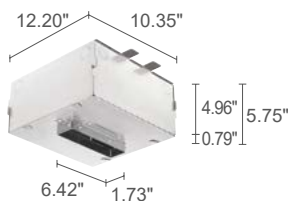

WC8702
Outer casing for rebated installation in solid ceilings (Bitpop 4.1)

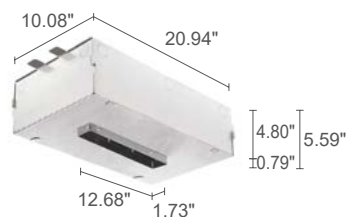


WC8709
Outer casing for rebated installation in solid ceilings (Bitpop 8.1)




INDOOR RECESSED

BITPOP 1.0


S - 17°

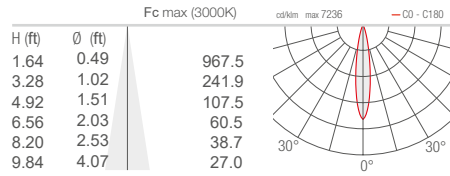


F - 30°

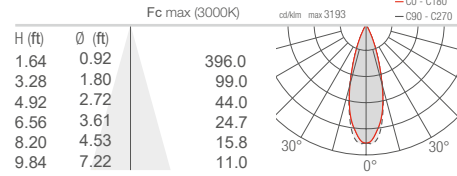

L - 42°

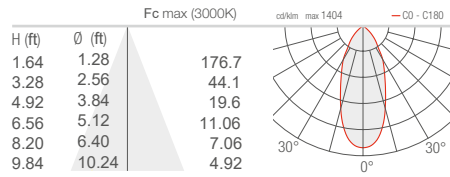


W - 17°x45°

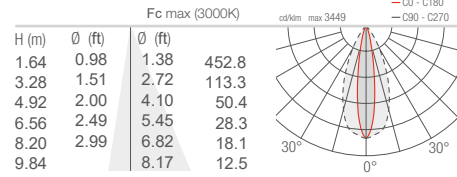


BITPOP 2.1


S - 17°

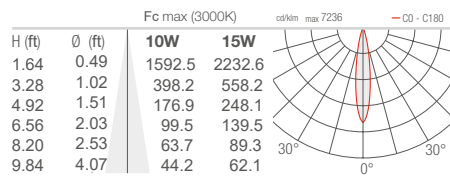


F - 30°

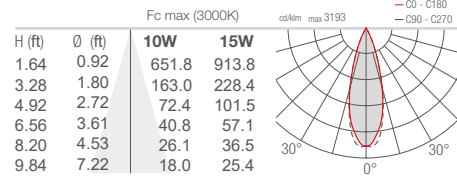

L - 42°

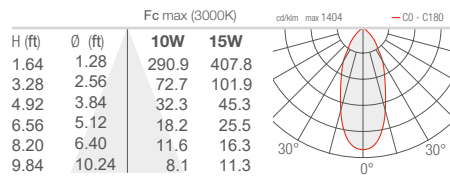


W - 17°x45°

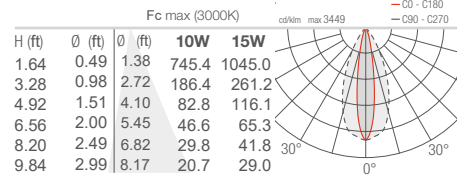


BITPOP 2.2 4.1


S - 17°

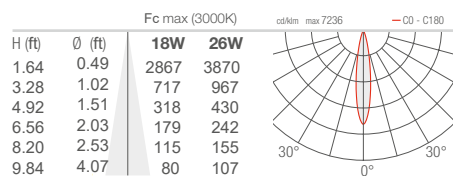


F - 30°

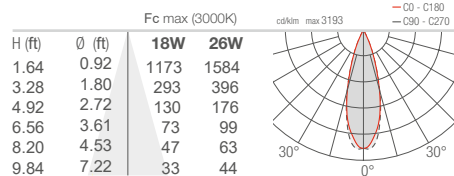

L - 42°

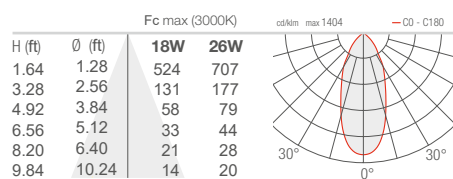


W - 17°x45°

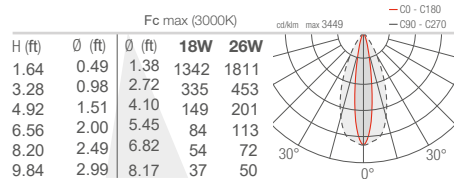


BITPOP 8.1


S - 17°

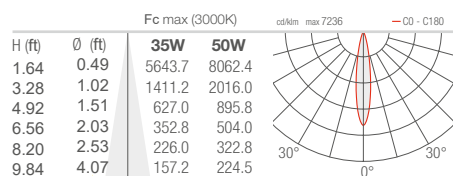

F - 30°

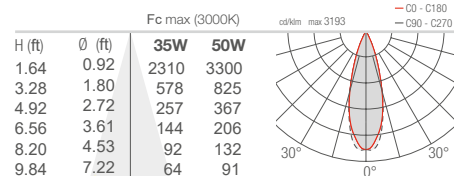

L - 42°

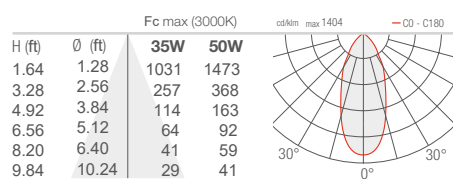

W - 17°x45°

