


BITRIX



DOUBLE AND ADJUSTABLE RECESSED FITTING.

A total recessed indoor luminaire of AirCoral® installable on plasterboards ceilings, Bitrix is provided with visible and orientable mechanisms. It also has a tiltable recessed light source of 1.97" and its beam, adjustable up to 30°, completes and valorizes every single detail of the lighting project.

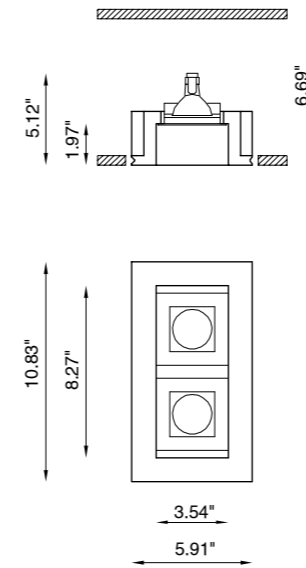

TECHNICAL FEATURES

Code	BU6343.Z.AC
Type	Tilttable downlight ± 30° 
Material	AC: AirCoral®
Absorption capacity*	5.83 m² (62.75 ft²)
Weight	4,41 lbs
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Constant current electronic driver (not included)
Cut out for plasterboard	11.22" x 6.30"
Lamp type	LED 500mA ⚡ V _f : 2 x 18 VDC
Lamp wattage	2 x 9W
Luminous efficacy	2 x 1125 lm - 3000K
Light distribution	Wide beam 40°
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Light hole	8.27" x 3.54"
Voltage connection	By driver (optional)
CRI	>90

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042