

BITRIX


DOUBLE SWIVELLING RECESSED LIGHT



Bitrix



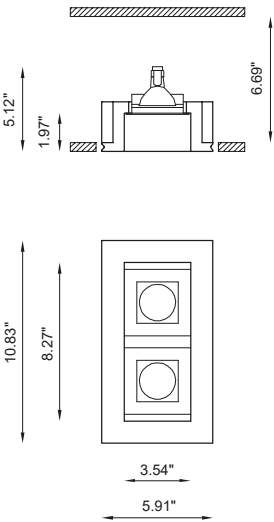

Indoor Recessed



OTHER AVAILABLE CODES

BU6343.Z.27.AC	<i>lens</i>	40°
	<i>light color</i>	2700K
BU6343.Z.40.AC	<i>lens</i>	40°
	<i>light color</i>	4000K (on request)

TECHNICAL FEATURES

Code	BU6343.Z.AC
Type	Tilttable downlight ± 30° 
Material	AC: AirCoral®
Absorption capacity*	62.75 ft²
Weight	4.41 lbs
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Remote constant current electronic driver (not included)
Cut out for plasterboard	11.22 × 6.30 in
Lamp type	LED 500mA  Vf: 2 × 18 VDC
Lamp wattage	2 × 9W
Luminous efficacy	2 × 1125 lm - 3000K
Light distribution	Wide beam 40°
Fitting	-
Light color	White 3000K
Light hole	8.27 × 3.54 in
Voltage connection	By driver (optional)
CRI	>90
Note	On request available emergency. Other available light colors: 2700K, 4000K (on request).



79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²