

# BOULEVARD 01 180


Boulevard is a series of outdoor bollards for surface installation. They are available in three different heights with 180° or 360° light emission and 3 standard finishes. Anchorage included.



## TECHNICAL DATA

<b>Wattage / Input</b>	9W (120-277VAC)
<b>Power Supply</b>	Integral
<b>Construction</b>	Body/Frame: High Corrosion Resistance, Die-cast, Copper-free Aluminum Coating: Polyester Powder Coating with Phosphocromating Pre-finish
<b>CCT</b>	3000K, 4000K
<b>Delivered Lumens</b>	800 lm (3000K)
<b>Efficacy</b>	88.9 lm/W
<b>Optics</b>	180°
<b>Finishes</b>	Textured Gray, Anthracite Gray, Matte Black
<b>Fixture Dimensions</b>	Ø6.69" x 8.66" h
<b>Fixture Weight</b>	8.82 lbs
<b>LED Source</b>	NR. 6 CREE XH-G mid-power LEDs
<b>IP Rating</b>	IP65
<b>Impact Rating</b>	IK10

Fixture Dimensions

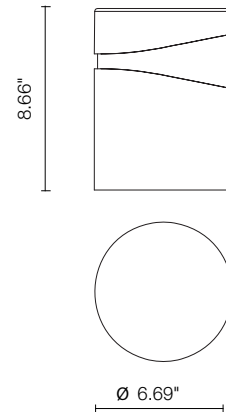

## ORDERING INFORMATION

Example: 609001P-30K-180-TG.

609001P	-		-	180	-	
Model No.	CCT	Optics	Finish			
609001P	30K - 3000K 40K - 4000K	180 - 180°	TG - Textured Gray AG - Anthracite Gray MB - Matte Black			

Anchorage Included


Job Name/Date:

Fixture Type Designation:

## PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 125.4

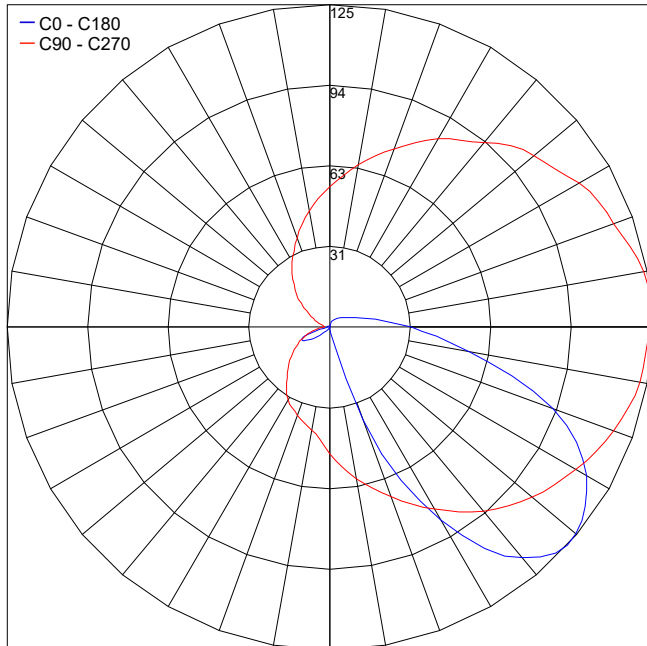

Job Name/Date:

Fixture Type Designation: