

BOULEVARD 01 180


Boulevard is a series of outdoor bollards for surface installation. They are available in three different heights with 180° or 360° light emission and 3 standard finishes. Anchorage included.



TECHNICAL DATA

Wattage / Input	9W (120-277VAC)
Power Supply	Integral
Construction	Body/Frame: High Corrosion Resistance, Die-cast, Copper-free Aluminum Coating: Polyester Powder Coating with Phosphocromating Pre-finish
CCT	3000K, 4000K
BUG Rating	B0-U2-G1
Delivered Lumens	800 lm (3000K)
Efficacy	88.9 lm/W
Optics	180°
Finishes	Textured Gray, Anthracite Gray, Matte Black
Fixture Dimensions	Ø6.69" x 8.66" h
Fixture Weight	8.82 lbs
LED Source	NR. 6 CREE XH-G mid-power LEDs
IP Rating	IP65
Impact Rating	IK10

Fixture Dimensions

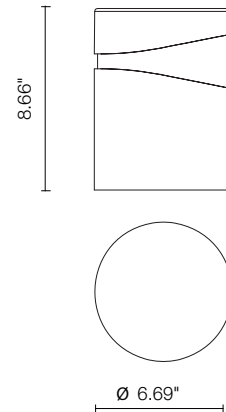

ORDERING INFORMATION

Example: 609001P-30K-180-TG.

609001P	-		-	180	-	
Model No.	CCT	Optics	Finish			
609001P	30K - 3000K 40K - 4000K	180 - 180°	TG - Textured Gray AG - Anthracite Gray MB - Matte Black			

Anchorage Included


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 125.4

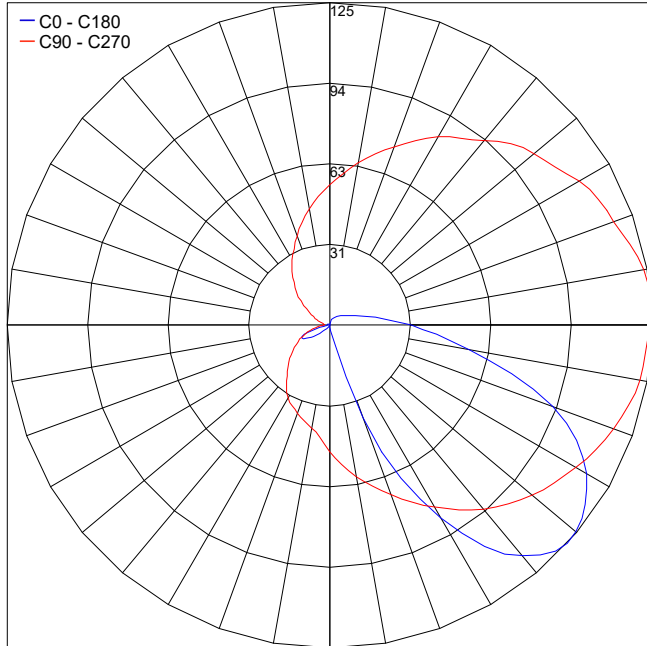

Job Name/Date:

Fixture Type Designation: