

BOULEVARD 03 180


Boulevard is a series of outdoor bollards for surface installation. They are available in three different heights with 180° or 360° light emission and 3 standard finishes. Anchorage included.



TECHNICAL DATA

| | |
|---------------------------|--|
| Wattage / Input | 9W (120-277VAC) |
| Power Supply | Integral |
| Construction | Body/Frame: High Corrosion Resistance, Die-cast, Copper-free Aluminum Coating: Polyester Powder Coating with Phosphochromating Pre-finish |
| CCT | 3000K, 4000K |
| BUG Rating | B0-U2-G1 |
| Delivered Lumens | 800 lm (3000K) |
| Efficacy | 88.9 lm/W |
| Optics | 180° |
| Finishes | Textured Gray, Anthracite Gray, Matte Black |
| Fixture Dimensions | Ø6.69" x 39.37" h |
| Fixture Weight | 15.43 lbs |
| LED Source | NR. 6 CREE XH-G mid-power LEDs |
| IP Rating | IP65 |
| Impact Rating | IK10 |

Fixture Dimensions

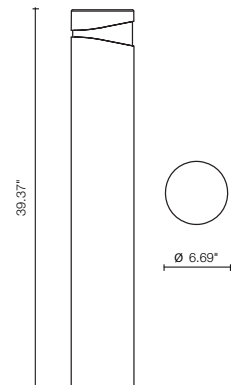

Anchorage Included

ORDERING INFORMATION


Example: 609005P-30K-180-TG.

| | | | | | | |
|------------------|----------------------------|---------------|---|-----|---|--|
| 609005P | - | | - | 180 | - | |
| Model No. | CCT | Optics | Finish | | | |
| 609005P | 30K - 3000K 40K - 4000K | 180 - 180° | TG - Textured Gray AG - Anthracite Gray MB - Matt Black | | | |

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 124.5

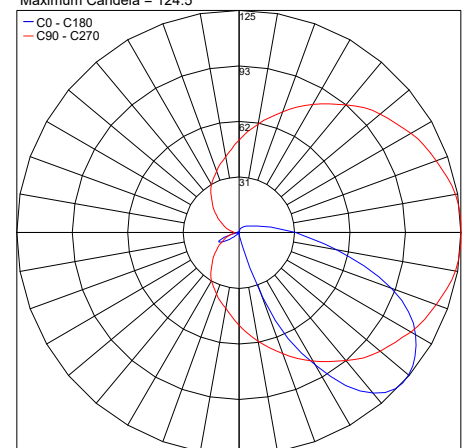

Job Name/Date:

Fixture Type Designation: