

# BRICK 1



Brick is a wall-mounted, graphic light that highlights outdoor areas essential for public and private life. It is available with a single beam or both an up and down beam, as well as a light strip on the front of the fixture as a marking element. Brick 1 is the single beam version with 3 optics options and 5 standard finishes.



## TECHNICAL DATA

<b>Wattage / Input</b>	2.2W (+ 1W Brick 1F with front light)
<b>Power Supply</b>	Remote, not included. Consult Factory
<b>Construction</b>	Body: Anticorodal Aluminum (Anodizing Treatment up to 18 Micron) Lens: Extra Clear Tempered Glass Front Lens: Polished White Milk PMMA (Acrylic) Fixing Bracket/Screws: Stainless Steel Cable Length: 1.64'
<b>CCT</b>	3000K, 4000K
<b>Delivered Lumens</b>	214 lm (Brick 1 - 3000K) 214 + 102 lm (Brick 1F - 3000K)
<b>Efficacy</b>	93.7 lm/W (Brick 1 - 3000K) 93.7 + 102 lm/W (Brick 1F - 3000K)
<b>Optics</b>	3 Standard, See Below
<b>Finishes</b>	5 Standard, See Below
<b>Fixture Dimensions</b>	2.76" x 2.36" x 5.91" h (opening on Brick 1F - 4.53" h)
<b>Color Consistency</b>	<3-Step MacAdam
<b>IP Rating</b>	IP65
<b>Impact Resistance</b>	IK07

Fixture Dimensions



## ORDERING INFORMATION

Example: LM02.100107.US.02.MD.BP. Power supplies ordered separately.

Model No.	Finish	Optic	CCT	Front CCT
LM02.100106.US (Brick 1)	01 - White	SP - 10-15°	BP - 3000K	RE - Red
LM02.100107.US (Brick 1F)	02 - Black	MD - 20-35°	BF - 4000K	GR - Green
	03 - Gray	FL - 40-55°		BL - Blue
	04 - Cor-ten			<b>NOTE:</b> Front light on Brick 1F model only
	11 - Anthracite			

Job Name/Date:

Fixture Type Designation:


## SUGGESTED POWER SUPPLIES

Consult Factory

## PHOTOMETRIC DATA

Note: All photometric data is 3000K

Maximum Candela = 323.6

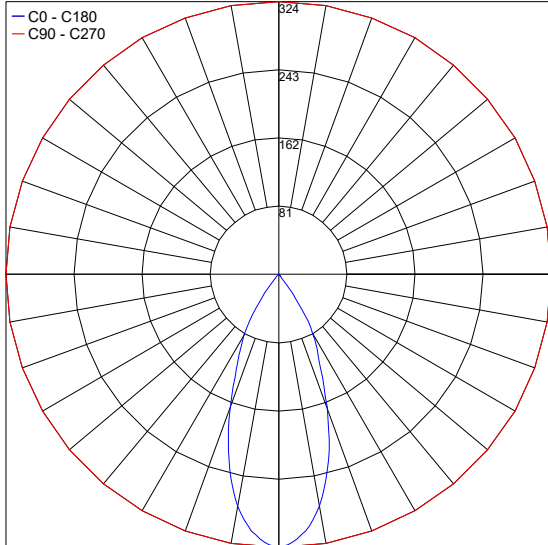

PHOTOMETRIC FILENAME : BRICK 1 LM02.100106.XX.FL.BP.IES

Job Name/Date:

Fixture Type Designation: