

# BRIGHT MINI 1.1

The Bright Mini 1.0 series are small, versatile and provide a uniform glow. Available in numerous color temperatures, this fixture can be installed in-grade, wall mount or ceiling mount.




## TECHNICAL DATA

<b>Wattage / Input</b>	1.2W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body/Trim: AISI 316L Stainless Steel Lens: Tempered Frosted Glass Cable Length: 4.92' standard
<b>CCT</b>	2700K, 3000K, 4000K, 5000K
<b>CRI</b>	>80
<b>BUG Rating</b>	B0-U2-G0 (3000K)
<b>Delivered Lumens</b>	20 lm (3000K)
<b>Efficacy</b>	16.7 lm/W (3000K)
<b>Optics</b>	Diffuse
<b>Finishes</b>	Stainless Steel
<b>Fixture Dimensions</b>	1.38" l x 1.38" w x 1.61" h
<b>Cut-out Size</b>	Ø 1.18" (for ceiling or wall installations)
<b>Fixture Weight</b>	0.32 lbs
<b>LED Source</b>	1 Power LED
<b>Lumen Maintenance</b>	L80 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	1/4 ANSI BIN
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP68
<b>IK Rating</b>	IK10

Cutout Dimensions for ceiling/wall installations with fixing spring = Ø 1.18"

Fixture Dimensions

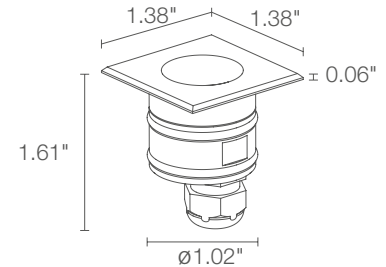

## ORDERING INFORMATION

Example: MB1100FDI. Accessories / Power Supplies ordered separately.

MB1100		D	I
<b>Model No.</b>	<b>CCT</b>	<b>Optics</b>	<b>Finish</b>
MB1100	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K	D - Diffuse	I - Stainless steel

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00149</a>	Non-Dim	120VAC to 24VDC, 10W, Class 2	1-6
<a href="#">PPLT00632</a>	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-8
<a href="#">PPLT00155</a>	Non-Dim	120VAC to 24VDC, 30W, Class 2	1-20
<a href="#">PPLT00586</a>	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-26
<a href="#">PPLT00709</a>	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-64
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	9-66


## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00273</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-26
<a href="#">PPLT00530</a>	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-64

For other power supply options consult factory.

## ACCESSORIES

### Installation

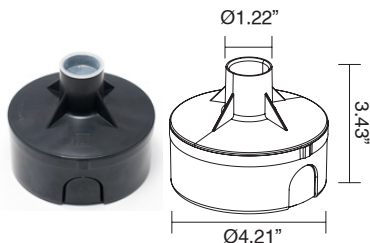

#### WC0202

Outer Casing


For in-grade use



#### WG0302

Fixing Spring

For ceiling/wall use



#### PPMP03159

Core Drilled


Application Sleeve

Job Name/Date:

Fixture Type Designation:

**PHOTOMETRIC DATA**  
**3000K**

**D** - Diffuse

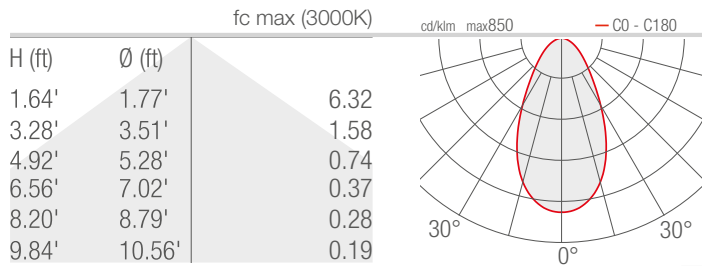

Job Name/Date:

Fixture Type Designation: