

BRIGHT 1.8 316L


The Bright 1 316L Series are recessed uplights made of stainless steel that are suitable for installation in swimming pools and fountains up to a depth of 32.8' (10 m). The Bright 1.8 316L is available in diffuse optics and with RGB light.

TECHNICAL DATA

Wattage / Input	1.2W (12VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body and Trim: AISI 316L Stainless Steel Lens: 0.39" Tempered, Transparent Extra-Clear Glass Cable Length: 16.4'
CCT	RGB
CRI	N/A
Delivered Lumens	11 lm: (R) 3 lm, (G) 6 lm, (B) 2 lm (Transparent Diffuse)
Efficacy	9.16 lm/W
Optics	Diffuse (Transparent or Sandblasted)
Finishes	AISI 316L Stainless Steel
Fixture Dimensions	Ø1.38" w x 2.05" h
Fixture Weight	1.06 lbs
LED Source	1 Mid Power LED Full Color
Lumen Maintenance	L95,B10 >50,000hrs (Ta 25°C)
Color Consistency	1/4 ANSI BIN
Operating Temp.	-4°F to +113°F (Outdoor) +32°F to +113°F (Underwater)
IP Rating	IP68
Impact Rating	IK10



Fixture Dimensions:

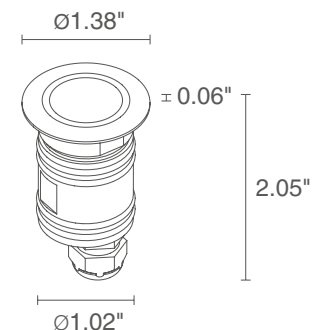

OUTER CASING REQUIRED

ORDERING INFORMATION

Example: CW18006DTI. Accessories / Power Supplies ordered separately.

CW1800	6		I	
Model No.		Optics		Cable Length
CW1800	6 - RGB	DT - Diffuse Transparent DS - Diffuse Sandblasted	I - Stainless Steel	16.40' standard 2 - 32.81' 3 - 49.21' 4 - 65.62'

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES


12VDC - FOR USE WITH FOUNTAIN / WATER FEATURES

Part Number	Description	Input/Output	# of Fixtures
FPV-060EL0012	DMX / RDM (Field Addressable) / DALI	120-277VAC to 12VDC, 60W, Class 2, IP66, NEMA 4X	1-40

For other power supply options consult factory.

ACCESSORIES

Installation

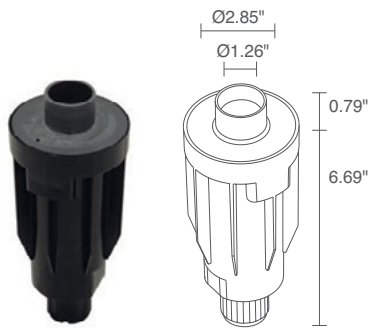

WC5003


Outer Casing

REQUIRED


PHOTOMETRIC DATA

**White created by mixing the colors*

DT - Diffuse transparent

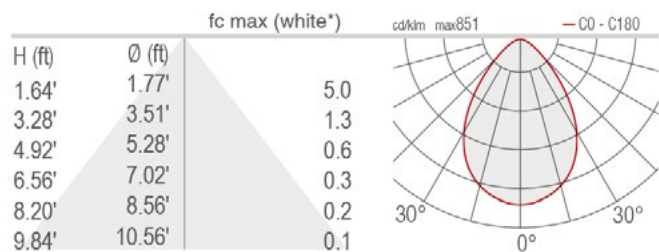

DS - Diffuse sandblasted

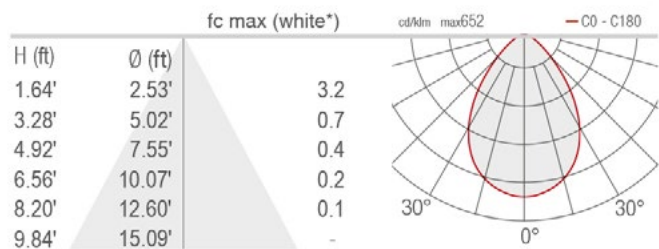

Job Name/Date:

Fixture Type Designation: