

BRIGHT 2.0 316L


The Bright 2 316L Series are recessed uplights made of stainless steel that are suitable for installation in swimming pools and fountains up to a depth of 32.8' (10 m). The Bright 2.0 316L is available in 3 optics options and white, blue or RGB light.

TECHNICAL DATA

Wattage / Input	6W (500mA)
Power Supply	Remote, not included. See page 2.
Construction	Body and Trim: AISI 316L Stainless Steel Lens: 0.39" Tempered, Transparent Extra-Clear Glass Cable Length: 16.4'
CCT	2700K, 3000K, 4000K, 5000K, Blue, RGB
CRI	CRI>80
BUG Rating	B1-U0-G0 (3000K)
Delivered Lumens	314 lm (3000K, 24°) 198 lm: (R) 73 lm (G) 94 lm (B) 31 lm (24°)
Efficacy	52.3 lm/W (3000K) 33 lm/W (RGB)
Optics	10°, 24°, 38°
Finishes	AISI 316L Stainless Steel
Fixture Dimensions	Ø5.24" x 2.56" h
Fixture Weight	3.53 lbs
LED Source	3 Power LEDs (2W each)
Lumen Maintenance	L90, B10 >50,000hrs (Ta 25°C)
Color Consistency	1/4 ANSI BIN
Operating Temp.	-4°F to +113°F (Outdoor) +32°F to +113°F (Underwater)
IP Rating	IP68
Impact Rating	IK10



Fixture Dimensions:

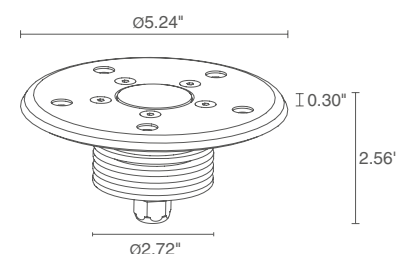

OUTER CASING REQUIRED

ORDERING INFORMATION

Example: CW20325LAI. Accessories / Power Supplies ordered separately.

CW2032			AI	-	
Model No.	CCT	Optics	Finish	Cable Length	
CW2032	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - Blue 6 - RGB	S - 10° M - 24° L - 38°	AI - Stainless Steel	16.40' standard 2 - 32.81' 4 - 65.62'	

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA - FOR USE WITH FOUNTAIN / WATER FEATURES

Part Number	Description	Input/Output	# of Fixtures
FPC-100EL0500	DMX / RDM (Field Addressable) / DALI	120-277VAC to 500mA, 100W, Class 2, IP66, NEMA 4X	1-8

500mA RGB - FOR USE WITH FOUNTAIN / WATER FEATURES

Part Number	Description	Input/Output	# of Fixtures
FPC-100EL0500	DMX / RDM (Field Addressable) / DALI	120-277VAC to 500mA, 100W, Class 2, IP66, NEMA 4X	1-5


For other power supply options consult factory.

ACCESSORIES

Installation



WC5002
Outer Casing
REQUIRED



WC5102
PVC Coated Accessory
REQUIRED



Installation with Accessory
for PVC Sheathing
REQUIRED


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all Photometry is 3000K


S - 10°

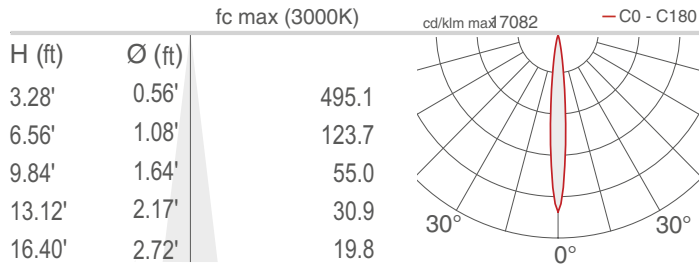

M - 24°

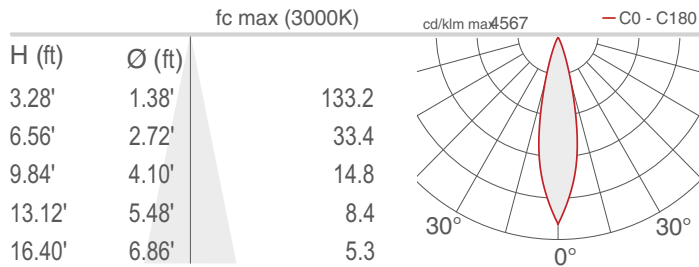

L - 38°

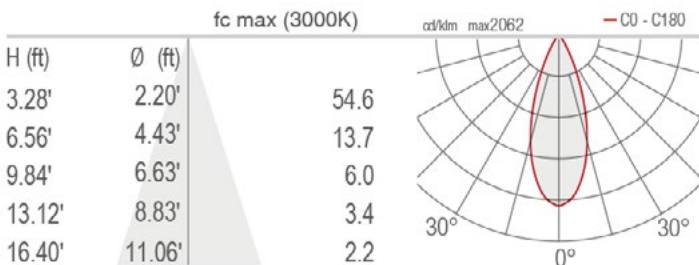

Job Name/Date:

Fixture Type Designation: