

## OUTDOOR WALL MOUNTED WITH SINGLE- OR DOUBLE-BEAM OPTICS


2700K 3000K 4000K



**SINGLE BEAM**



**DOUBLE BEAM**



narrow medium wide elliptical



**BROM 1.0**  
2W 500mA  
88 lm (3000K, 500mA, 20°)



**BROM 2.0**  
4W 500mA  
176 lm (3000K, 500mA, 20°)



narrow medium wide





**BROM 3.0**  
6W 500mA  
251 lm (3000K, 500mA, 20°)



**BROM 4.0**  
12W 500mA  
502 lm (3000K, 500mA, 20°)

< **BROM 3.0**  
3000K, 6W, 12°  
**BROM 4.0**  
3000K, 12W, UP optics 12° / DOWN optics 12°

Project by / geom. Giuseppe Carannante  
Villa Punta Pennata, Bacoli, Naples, Italy

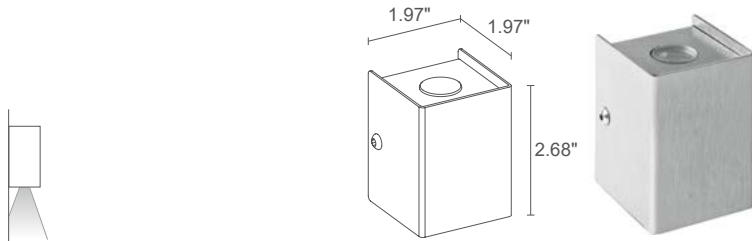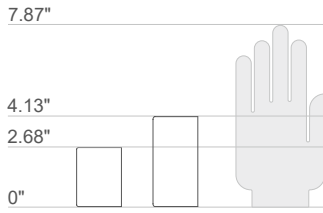


## BROM 1.0



IP66 IK08 CASAMBI

<b>POWER / MODEL CODE</b>	2W 500mA <b>BR10012</b> ■ ■ ■ I
<b>LED COLOR</b>	<b>F</b> - 2700K <b>S</b> - 3000K <b>9</b> - 4000K
<b>OPTICS</b>	<b>S</b> - 10° <b>M</b> - 20° <b>L</b> - 40° <b>W</b> - 10°x45°

LUMEN OUTPUT AT SOURCE	145 lm (3000K, 500mA)
DELIVERED LUMEN OUTPUT	88 lm (3000K, 500mA, 20°)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN (white LED colour) 50000h L90 B10 (Ta 25°C)
MATERIAL	body and trim in AISI 316L stainless steel lens in transparent, tempered extra-clear glass
POWER SUPPLY UNIT	Remote power supply required, not included
POWER CABLES	includes 2x0.98 ft single-core cables
WIRING	series
MOUNTING	surface mounted (wall)

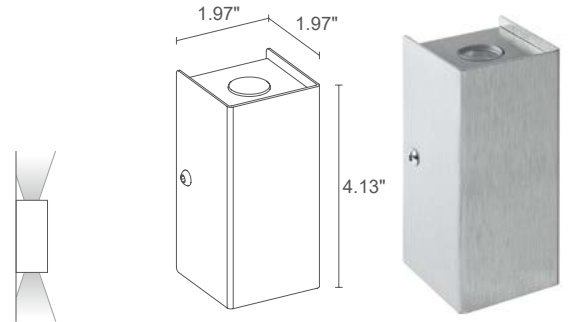



## BROM 2.0



IP66 IK08 CASAMBI

<b>POWER / MODEL CODE</b>	max 4W max 500mA <b>BR20022</b> ■ ■ ■ I
<b>LED COLOR</b>	<b>F</b> - 2700K <b>S</b> - 3000K <b>9</b> - 4000K
<b>OPTICS</b>	UP optics: <b>S</b> - 10° <b>M</b> - 20° <b>L</b> - 40° <b>W</b> - 10°x45° DOWN optics: <b>S</b> - 10° <b>M</b> - 20° <b>L</b> - 40° <b>W</b> - 10°x45°

LUMEN OUTPUT AT SOURCE	290 lm (3000K, 500mA)
DELIVERED LUMEN OUTPUT	176 lm (3000K, 500mA, 20°)
NO. AND TYPE OF LED	2 power LEDs 1/4 ANSI BIN (white LED colour) 50000h L90 B10 (Ta 25°C)
MATERIAL	body and trim in AISI 316L stainless steel lens in transparent, tempered extra-clear glass
POWER SUPPLY UNIT	Remote power supply required, not included
POWER CABLES	includes 2x0.98 ft single-core cables
WIRING	series
MOUNTING	surface mounted (wall)

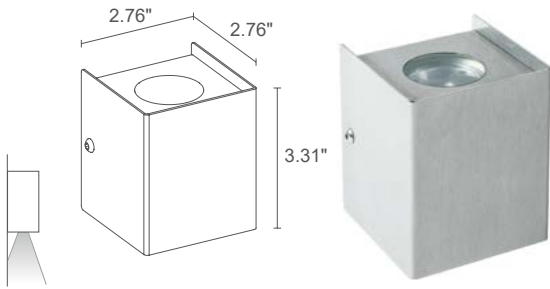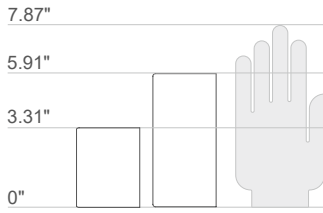

## BROM 3.0



0.99 lbs

IP66 IK08 CASAMBI

6W 500mA

**BR30032** ■ ■ ■ I

■ **F** - 2700K  
**S** - 3000K  
**9** - 4000K

■ **S** - 12°  
**M** - 20°  
**L** - 35°

436 lm (3000K, 500mA)

251 lm (3000K, 500mA, 20°)

3 power LEDs  
 1/4 ANSI BIN (white LED colour)  
 50000h L90 B10 (Ta 25°C)


body and trim in AISI 316L stainless steel  
 lens in transparent, tempered extra-clear glass

Remote power supply required, not included

includes 2x0.98 ft single-core cables

series

surface mounted (wall)

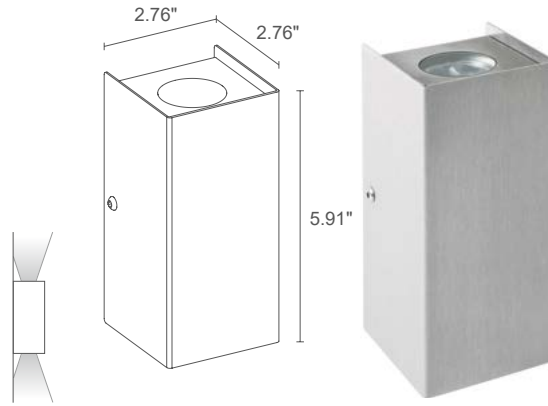

## BROM 4.0



1.76 lbs

IP66 IK08 CASAMBI

12W 500mA

**BR40062** ■ ■ ■ I

■ **F** - 2700K  
**S** - 3000K  
**9** - 4000K

■ UP optics:  
**S** - 12°  
**M** - 20°  
**L** - 35°

DOWN optics:  
**S** - 12°  
**M** - 20°  
**L** - 35°

872 lm (3000K, 500mA)

502 lm (3000K, 500mA, 20°)

6 power LEDs  
 1/4 ANSI BIN (white LED colour)  
 50000h L90 B10 (Ta 25°C)


body and trim in AISI 316L stainless steel  
 screen in transparent, tempered extra-clear glass

Remote power supply required, not included

includes 2x0.98 ft single-core cables

series

surface mounted (wall)




10°x45° optics  
 (Brom 1.0 / 2.0)


## OUTDOOR WALL MOUNTED

### BROM 1.0


#### S - 10°

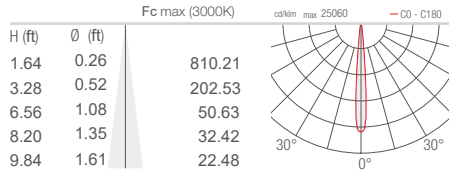


#### M - 20°

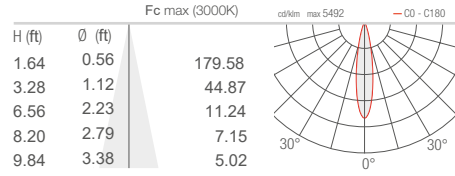

#### L - 40°

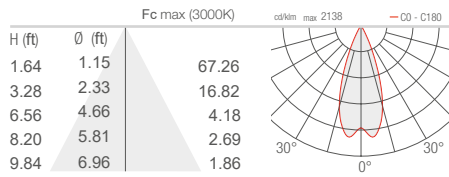


#### W - 10°x45°

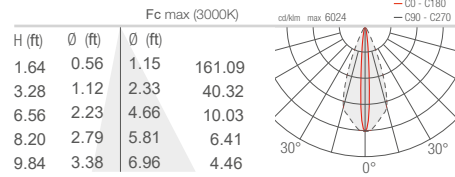


### BROM 3.0

#### S - 12°

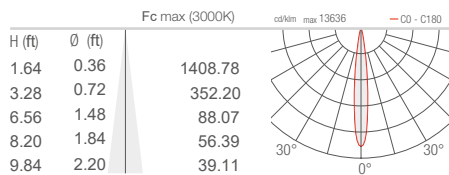

#### M - 20°

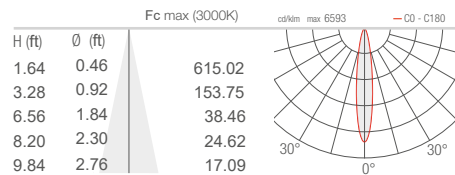

#### L - 35°

