

Bubble and Bic are round wall mounted LED luminaires for indoor or outdoor installation. Bubble has a clear dome lens and Bic has a grill over the dome lens. Either fixture is available in 3 color temperatures and 5 standard finishes.



Bic

Bubble



MADE IN THE U.S.A.
Complies with ADA

Fixture Dimensions
See Drawing on page 2.

TECHNICAL DATA

Wattage / Input	30W (120-277VAC)
Power Supply	Integral 0-10V Dimming
Construction	Body: Low Copper Allow Cast Aluminum Lens: UV Stabilized Opal Polycarbonate
CCT	3000K, 4000K, 5000K
Delivered Lumens	2417 lm (3000K)
Efficacy	80.6 lm/W
Finishes	5 Standard, Custom RAL - See Below
Fixture Dimensions	Ø11.88" x 6.00"
IP Rating	IP65

ORDERING INFORMATION

Example: **BUB-L-FL-1-TS-0-C-X-0**.


	-		-		-		-	C	-	X	-	0
Model No.	Wattage	Body	Finish	Grill/Face	Driver	Lens	Options					
BUB-L - Bubble	FL - 30W, 3000K LED	1 - Surface Mount No Conduit Entries	11 - White Suede	0 - None	C - 120-277VAC, 0-10V Dimming	X - Opal Polycarbonate	0 - None					
BIC-L - Bic	FM - 30W, 4000K LED	0 - Surface Mount 2 Conduit Entries	02 - Black Suede	1 - Standard	Integral							
	FN - 30W, 5000K LED	2 - Semi Recessed	03 - Gray									
	Note: LED 3500 lm output. Lower lumen package available upon request		TS - Silver									
			18 - Tex. Bronze									
			99 - Custom									

Job Name/Date:


Fixture Type Designation:

FIXTURE DIMENSIONS

Bic

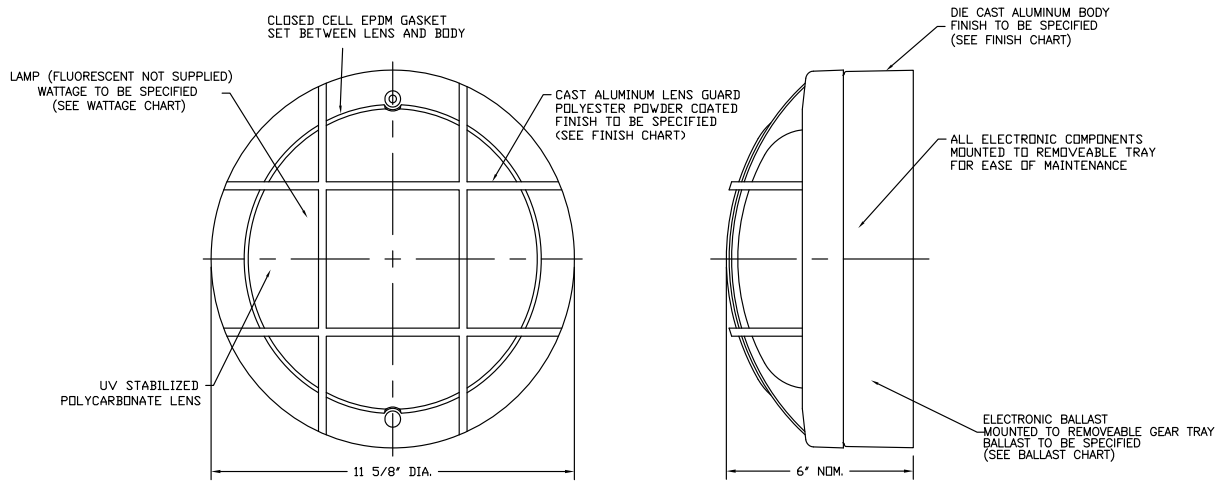

Bubble

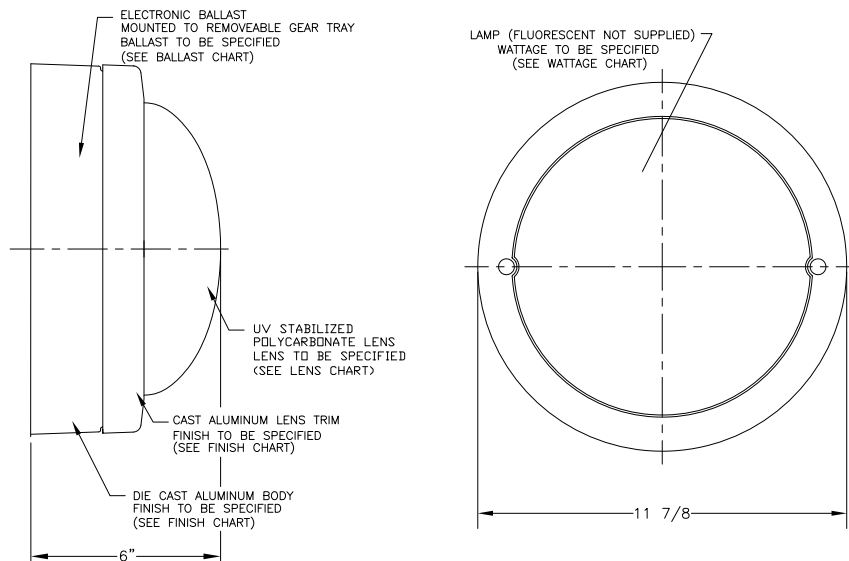


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note: Photometry is 3000K

Maximum Candela = 725.9

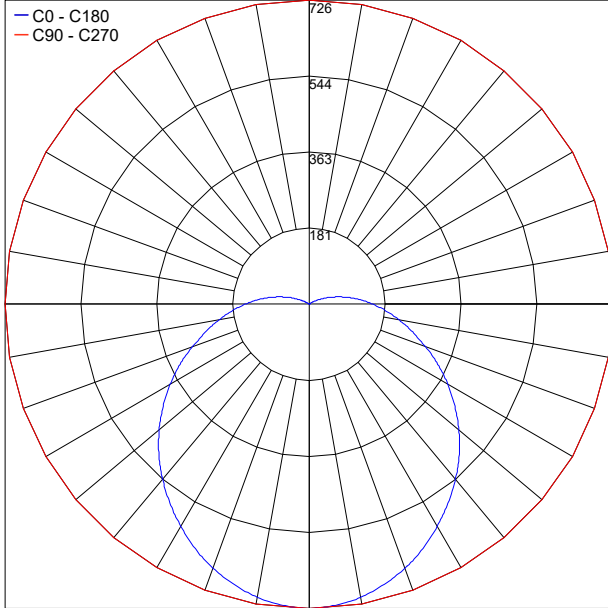

Job Name/Date:

Fixture Type Designation: