




INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS. READ ALL INSTRUCTIONS. IMPORTANT SAFETY INSTRUCTIONS. SAVE THESE INSTRUCTIONS.

DANGER - RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION! Please read all instructions before installation.

- Keep these instructions for future reference.
- Must be installed by a qualified electrician in accordance with national and local standards. Designplan is not responsible for fixtures installed without regard to these standards.
- Unauthorized alterations or tampering of product voids warranty.
- Suitable for OUTDOOR applications.

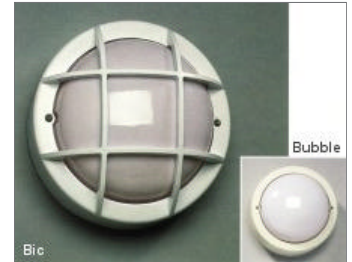

Maintenance

Scheduled maintenance must be carried out once a year on all lighting devices, regardless of appliance class and type of use. It must include the following operations:

- Check that the glass or plastic screen is intact, and replace it if broken or damaged.
- The internal components such as the driver, washers and screws must not show clear signs of oxidation or rust. Clear traces of rust and oxidation will indicate the presence of water inside the device.
- In the case of damage, the components must be replaced by original components or spare parts.
- The main power connection must be outside the device, and protected in accordance with local electrical codes.

Fixture Installation

1. The lighting fixture comes fully assembled.
2. Remove grill, lens and tray and connect the body to a standard outlet box. Designplan recommends that the contractor utilize the three mounting holes in the back of the body to mount to the structure as well. It is the contractor's responsibility to supply proper anchorage based on job conditions. It is also the contractor's responsibility to caulk the back of the fixture in order to satisfy wet label requirements.
3. Unplug the amp connector. Make supply lead connections in the body using the female amp connector. CONNECT GREEN WIRE TO "GROUND", CONNECT BLACK FIXTURE TO BLACK BUILDING WIRE AND CONNECT WHITE FIXTURE WIRE TO WHITE BUILDING WIRE. THE RED AND ORANGE WIRES ARE FOR DIMMING DRIVER(0-10v). Plug amp connector back together.
4. Secure the LED tray inside the body.
5. Affix the grill and lens over the housing.

