




BULL



PULL-OUT AND SWIVELLING PROJECTOR


SUPERFUTUREDESIGN*



Bull



Indoor Recessed

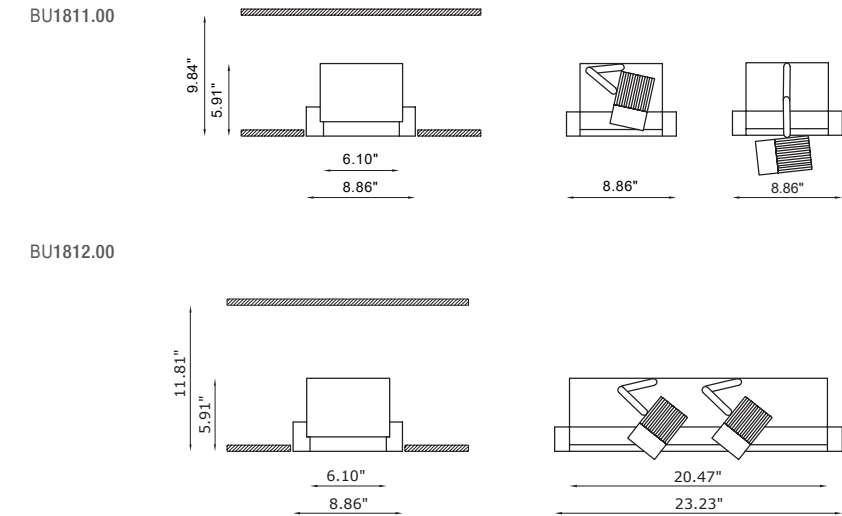

TECHNICAL FEATURES


Code	BU1811.00	BU1812.00
Type	Tilttable downlight ± 360° / ± 90° 	Tilttable downlight ± 360° / ± 90°
Material	00: Coral®	00: Coral®
Weight	9.92 lbs	15.43 lbs
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included)
Cut out for plasterboard	9.25 × 9.25 in	9.25 × 23.62 in
Lamp type	LED 700mA 	LED 700mA
Lamp wattage	1 × 26W	2 × 26W
Luminous efficacy	1 × 3500 lm - 3000K	2 × 3500 lm - 3000K
Light distribution	Beam 24°	Beam 24°
Fitting	-	-
Light color	White 3000K	White 3000K
Light hole	6.10 × 6.10 in	6.10 × 20.47 in
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	>90
Note	Other available light colors: 2700K (on request), 4000K (on request). Other available beams: 38° (on request).	Other available light colors: 2700K (on request), 4000K (on request). Other available beams: 38° (on request).



79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

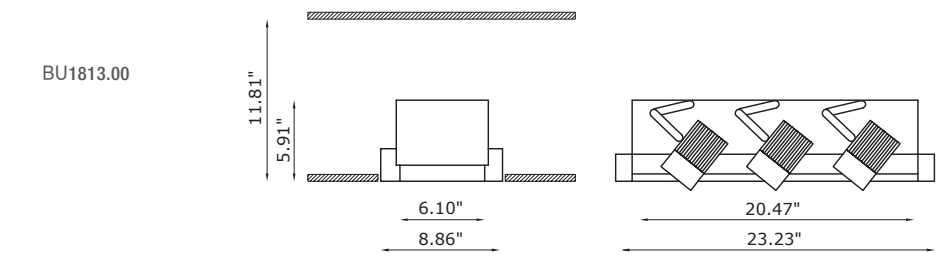

TECHNICAL FEATURES

Code	BU1813.00
Type	Tilttable downlight $\pm 360^\circ / \pm 90^\circ$
Material	00: Coral®
Weight	22.05 lbs
Mounting	Ceiling recessed
IP rating	IP40
Control gear	Remote constant current electronic driver (not included)
Cut out for plasterboard	9.25 × 23.62 in
Lamp type	LED 700 mA Vf: 3 × 37 VDC
Lamp wattage	3 × 26W
Luminous efficacy	3 × 3500 lm - 3000K
Light distribution	Beam 24°
Fitting	-
Light color	White 3000K
Light hole	6.10 × 20.47 in
Voltage connection	By driver (optional)
CRI	>90
Note	Other available light colors: 2700K (on request), 4000K (on request). Other available beams: 38° (on request).

