



C1 is a linear LED module for interiors, suitable to be installed on a 48V track with two lengths (22.2" and 44.5") and three different optics (20°, 30° and 26°x42°) allowing spaces to be lit directly. The product with UGR <15 (lens 20°), <14 (lens 30°), <18 (lens 26° x 42°) is suited to all situations in which a specific anti-dazzle effect is required.

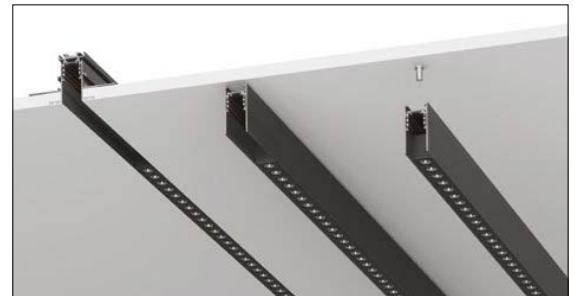

TECHNICAL DATA

Wattage / Input	10W (BUT048 L 00012) 18W (BUT048 L 00013)
Track Power Supply	Remote 48VDC power supply for track, not included. See 48V Track datasheet
Track Head	Integral 48V LED Converter in Track Adapter
Dimmng	Non-Dim, Dali
Construction	Body: Aluminum
CCT	3000K (2700K, 4000K on request)
CRI	>90
Delivered Lumens	1200 lm (BUT048 L 00012 - 3000K) 2100 lm (BUT048 L 00013 - 3000K)
Efficacy	120 lm/W (BUT048 L 00012 - 3000K) 116.7 lm/W (BUT048 L 00013 - 3000K)
Optics	20°, 30°, 26°x42°
UGR	<15 (lens 20°) <14 (lens 30°) <18 (lens 26°x42°)
Finishes	White, Black
Fixture Dimensions	0.79" w x 22.2" or 44.5" l (0.98" h)
Fixture Weight	0.88 lbs
IP Rating	IP20

Fixture Dimensions

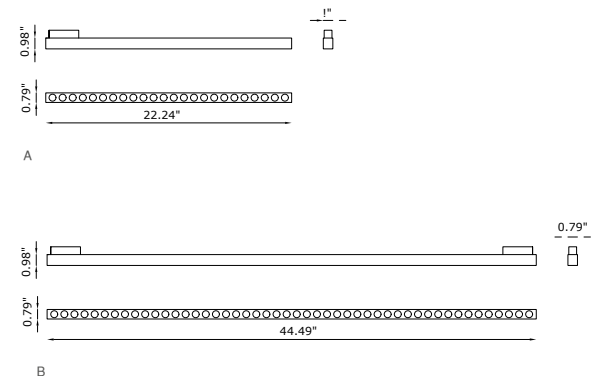

ORDERING INFORMATION

Example: BUT048L00012W13030110.US. Power Supplies / Track ordered separately.

					0	US
Model No.	Finish	Optic	CCT	Dimmability		
BUT048L00012 (22.2" l)	W1 - White	20 - 20°	27 - 2700K	ND - Non Dimmable	0	US
BUT048L00013 (44.5" l)	B1 - Black	30 - 30°	30 - 3000K	DA - DALI		
		42 - 26° x 42°	40 - 4000K			

Job Name/Date:

Fixture Type Designation:


SUGGESTED POWER SUPPLIES

48VDC - See Track Datasheets

48V TRACKS

<p>B55</p> <p>See B55 Track datasheet for ordering code and power supply</p>	<p>B30</p> <p>See B30 Track datasheet for ordering code and power supply</p>	<p>B-INSIDE</p> <p>See B-Inside Track datasheet for ordering code and power supply</p>
---	---	---

PHOTOMETRIC DATA - Note: All photometric data is 3000K

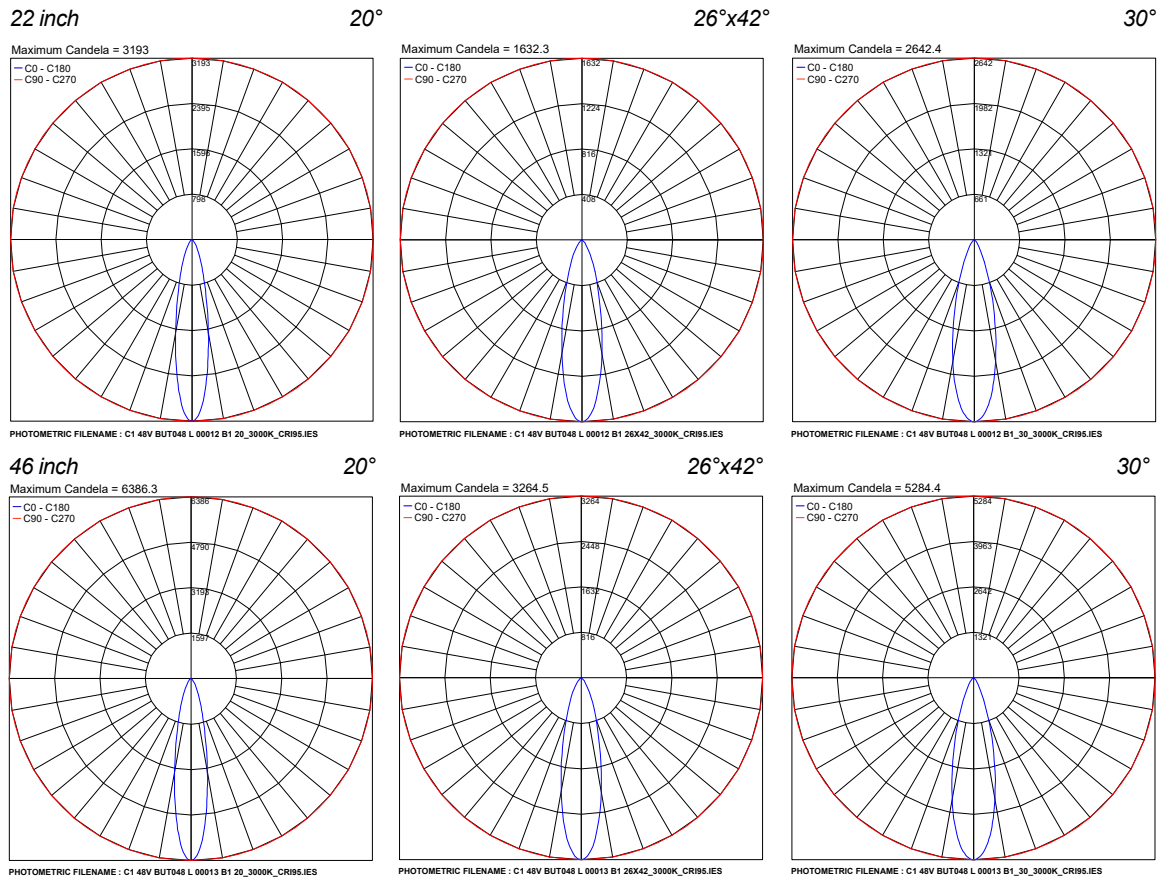

Job Name/Date:

Fixture Type Designation: