


C1

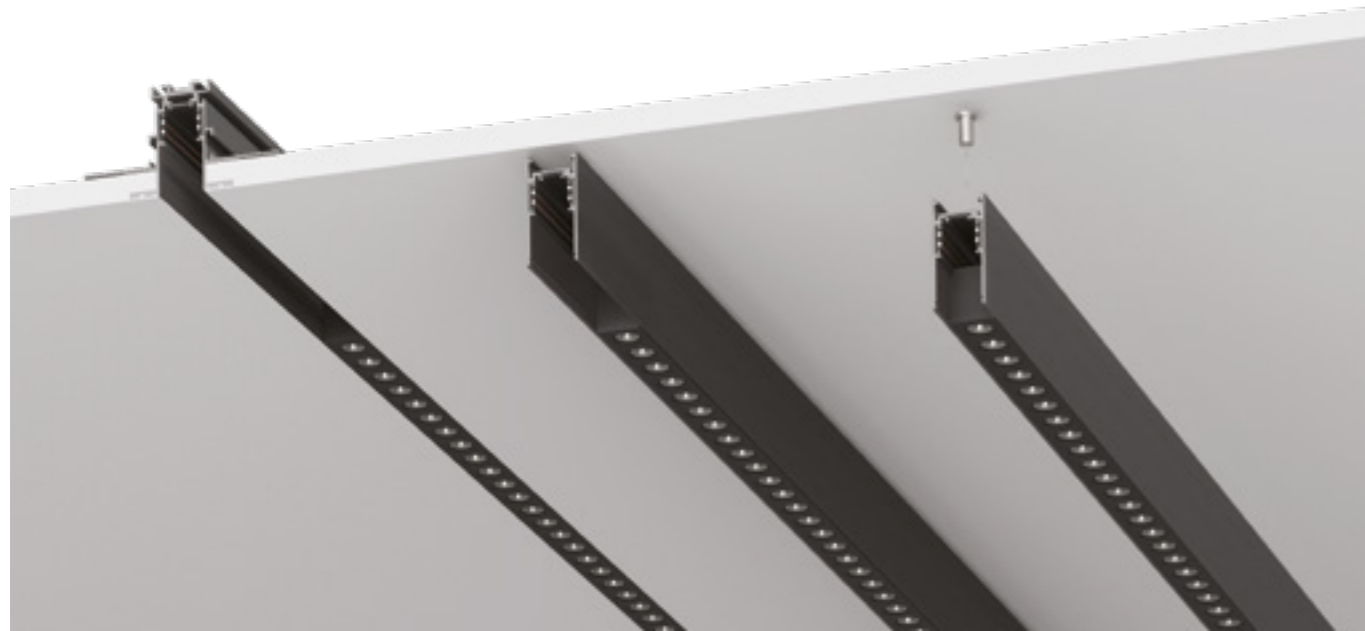

- matte white painted
- matte black painted

TOTALLY RECESSED INTO TRACKS


C1 is a linear LED module for interiors, suitable to be installed on a 48V track, with two different lengths (22.2" and 44.5") and three different optics (20°, 30° and 26° x 42°) allowing spaces to be lit directly. The product with UGR <15 (lens 20°), <14 (lens 30°) e <18 (lens 26° x 42°) is suited to all situations in which a specific anti-dazzle effect is required.



79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

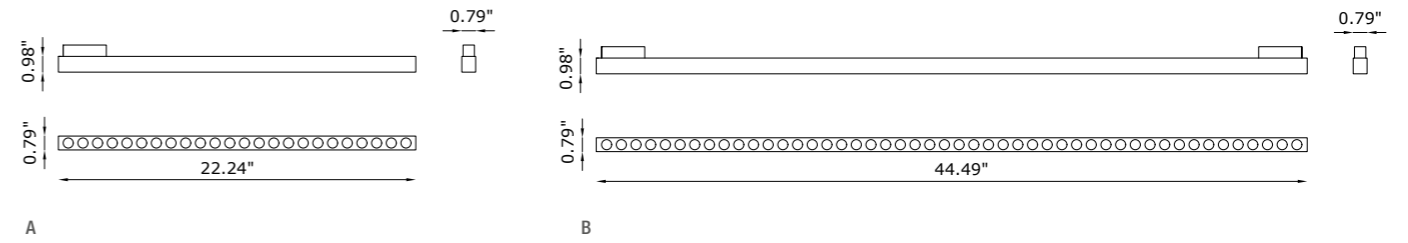

NEW

CODE COMPOSITION

BUT048 L 00012 0

<i>dimmiability</i>	
ND	non dimmable
DA	DALI
<i>light color</i>	
27	2700K
30	3000K
40	4000K
<i>lens</i>	
20	20°
30	30°
42	26° x 42°
<i>finishing</i>	
W1	white
B1	black

BUT048 L 00013 0

<i>dimmiability</i>	
ND	non dimmable
DA	DALI
<i>light color</i>	
27	2700K
30	3000K
40	4000K
<i>lens</i>	
20	20°
30	30°
42	26° x 42°
<i>finishing</i>	
W1	white
B1	black

TECHNICAL FEATURES

Code	BUT048 L 00012 XX	BUT048 L 00013 XX
Type	(fig.A) LED module	(fig.B) LED module
Material	Aluminum	Aluminum
Finishing	White Black	White Black
Weight	0.88 lbs	0.88 lbs
Mounting	Track 48V	Track 48V
IP rating	IP20	IP20
Control gear	Electronic driver on board (included)	Electronic driver on board (included)
Lamp type	LED	LED
Lamp wattage	10W	18W
Luminous efficacy	1200 lm - 3000K	2100 lm - 3000K
Light distribution	Beam 20° Beam 30° 26° x 42° (on request)	Beam 20° Beam 30° 26° x 42° (on request)
Fitting	-	-
Light color	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Voltage connection	48VDC	48VDC
CRI	>90	>90
UGR	<15 (lens 20°) <14 (lens 30°) <18 (lens 26° x 42°)	<15 (lens 20°) <14 (lens 30°) <18 (lens 26° x 42°)
Emergency	-	-

example of code composition

BUT048 L 00012 W1 20 27 ND 0