


C1-MINI-E-VL



C1-mini-E-VL is an LED spotlight for installation in display cases, suitable for showcase lighting in museum and retail settings. It is 360° rotatable, 125° swivelling with an attachment for mounting flange. It is available with a variety of optics, 5 color temperatures and 2 standard finishes.

TECHNICAL DATA

Wattage / Input	2.2W (600mA)
Power Supply	Remote, not included. See page 2.
Dimming	Dimming by Remote Driver - See page 2 (<i>Not Suitable for Dimming Pen</i>)
Construction	Body: Anodized Aluminum
CCT	2700K, 3000K, 3500K, 4000K, 5700K
CRI	>90
Delivered Lumens	140 lm (3000K, 30°)
Efficacy	63 lm/W (3000K, 30°)
Optics	8 Standard 15° Glass Lens – Aspherical w/ Light Diffusion Foil
Finishes	2 Standard, See Below
Fixture Dimensions	Ø0.65" x 2.20" h Standard Extension max. 17.32" (max visible length 1.57") - can be shortened on request. Additional height adjustable via flange. Panel thickness 0.08"-0.91" Borehole Ø0.57"
Lumen Maintenance	L80,B10 >50,000hrs
IP Rating	IP20

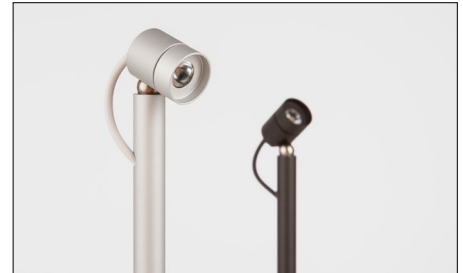

Fixture Dimensions

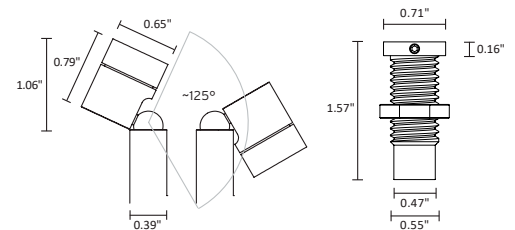

ORDERING INFORMATION

Example: C1-MINI-E-VL-22-40-18-SI. Accessories / Power Supplies ordered separately.

C1-MINI-E-VL	-	22	-		-		-	
Model No.	Wattage	CCT	Optics	Finish				
C1-MINI-E-VL (A400005)	22 - 2.2W	27 - 2700K	08 - 8°	SW - Anodized Black				
		30 - 3000K	15 - 15° *	SI - Silver				
		35 - 3500K	18 - 18°	Custom (min. 10)				
		40 - 4000K	26 - 26°	CH - Champagne				
		57 - 5700K	30 - 30°	HA - Hard Anodized				
			45 - 45°	GO - Gold				
	80 - 80°	BR - Mocha Bronze						
	47 - 47°+25°	RAL - Custom RAL						
		40 - 40°+10°						

* GLASS LENS – ASPHERICAL WITH LIGHT DIFFUSION FOIL, SEE ACCESSORIES PAGE

Job Name/Date:

Fixture Type Designation:

ACCESSORIES



Honeycomb Grid
A000601




Anti-Glare Tube
A300003 - ____
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)
BR - mocha bronze (min. 10)
RAL - custom RAL (min. 10)



Inclined Tube
A300146 - ____
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)
BR - mocha bronze (min. 10)



Snoot
A300005 - ____
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)
RAL - custom RAL (min. 10)
BR - mocha bronze (min. 10)



***15° Glass Lens**
A000500-S
Aspherical with Light Diffusion Foil
and Lens Holder



Barn Door
A300007 - ____
SI - silver
SW - black
RAL - custom RAL (min. 10)



Zoom Optic (9°-33°)
A300138 - ____
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)
BR - mocha bronze (min. 10)

SUGGESTED POWER SUPPLIES

600mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 600mA, 50W, Class 2, DAMP	1-16




For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

for light color 3,000 K | standard lens 30° | color rendering index typ. 97, R9 > 90, R12 > 90 | color variation ≤ 3 SDCM

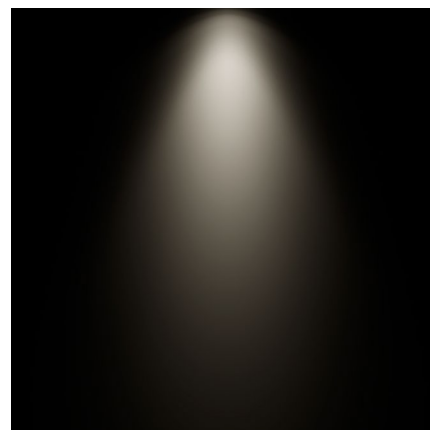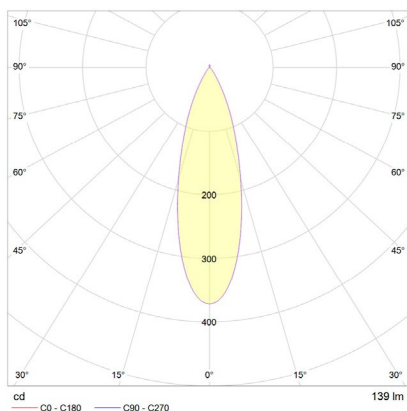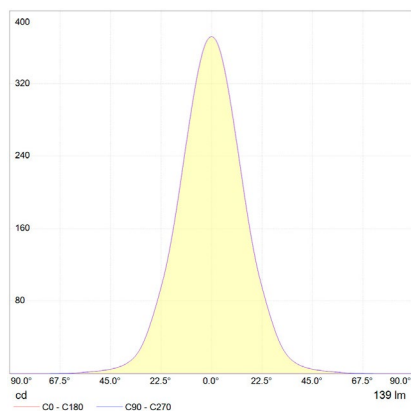

Job Name/Date:

Fixture Type Designation: