

C1-MINI-E-VL



C1-mini-E-VL is an LED spotlight for installation in display cases, suitable for showcase lighting in museum and retail settings. It is 360° rotatable, 125° swivelling with an attachment for mounting flange. It is available with a variety of optics, 5 color temperatures and 2 standard finishes.



TECHNICAL DATA

Wattage / Input	2.2W (600mA)
Power Supply	Remote, not included. See page 2.
Dimming	Dimming by Remote Driver - See page 2 <i>(Not Suitable for Dimming Pen)</i>
Construction	Body: Anodized Aluminum
CCT	2700K, 3000K, 3500K, 4000K, 5700K
CRI	>90
Delivered Lumens	140 lm (3000K, 30°)
Efficacy	63 lm/W (3000K, 30°)
Optics	7 Standard, See Below 8° or 15° Glass Lens - Aspherical w/ Diffusion Foil (See Accessories page)
Finishes	2 Standard, See Below Custom RAL
Fixture Dimensions	Ø0.65" x 2.20" h Standard Extension max. 17.32" (max visible length 1.57") - can be shortened on request. Additional height adjustable via flange. Panel thickness 0.08"-0.91" Borehole Ø0.57"
Lumen Maintenance	L80, B10 >50,000hrs
IP Rating	IP20

Fixture Dimensions

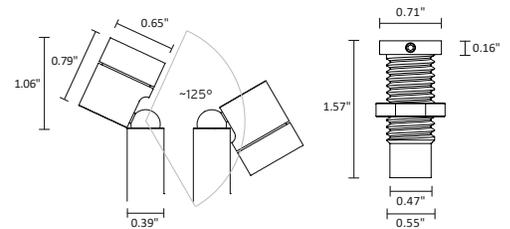

ORDERING INFORMATION

Example: C1-MINI-E-VL-22-40-18-SI. Accessories / Power Supplies ordered separately.

C1-MINI-E-VL	-	22	-		-		-		
Model No.	Wattage	CCT	Optics	Finish					
C1-MINI-E-VL (A400005)	22 - 2.2W	27 - 2700K	18 - 18°	SW - Anodized Black					
		30 - 3000K	26 - 26°	SI - Silver					
		35 - 3500K	30 - 30°	Custom (min. 10)					
		40 - 4000K	45 - 45°	CH - Champagne					
		57 - 5700K	80 - 80°	HA - Hard Anodized					
					47 - 47°+25°	GO - Gold			
			40 - 40°+10°	BR - Mocha Bronze					
				RAL - Custom RAL					

Job Name/Date:

Fixture Type Designation:

ACCESSORIES



Honeycomb Grid
A000601




Anti-Glare Tube
A300003 - ___
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)
BR - mocha bronze (min. 10)
RAL - custom RAL (min. 10)



Inclined Tube
A300146 - ___
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)
BR - mocha bronze (min. 10)



Snoot
A300005 - ___
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)
RAL - custom RAL (min. 10)
BR - mocha bronze (min. 10)



15° Glass Lens
A000500-S
Aspherical with Light Diffusion Foil
and Lens Holder



Barn Door
A300007 - ___
SI - silver
SW - black
RAL - custom RAL (min. 10)



Zoom Optic (9°-33°)
A300138 - ___
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)
BR - mocha bronze (min. 10)

For 8° Optic
Use 15° Glass Lens (A000500-S)
and Snoot (A300005)

SUGGESTED POWER SUPPLIES

600mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 600mA, 50W, Class 2, DAMP	1-16




For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

for light color 3,000K | standard lens 30° | color rendering index typ. 97, R9 > 90, R12 > 90 | color variation ≤ 3 SDCM

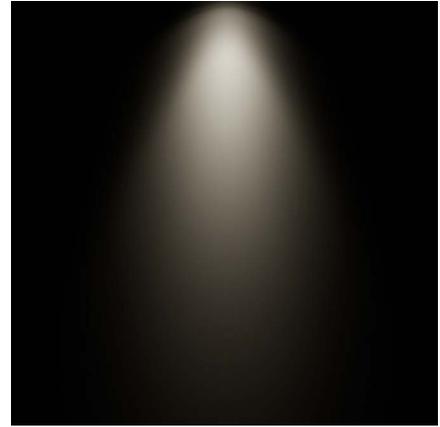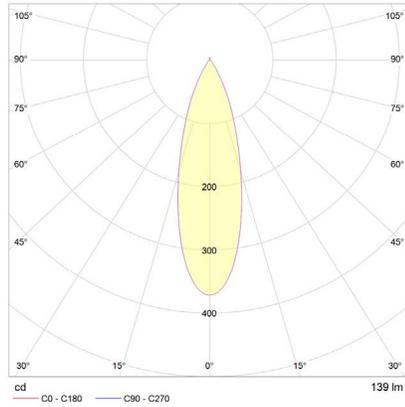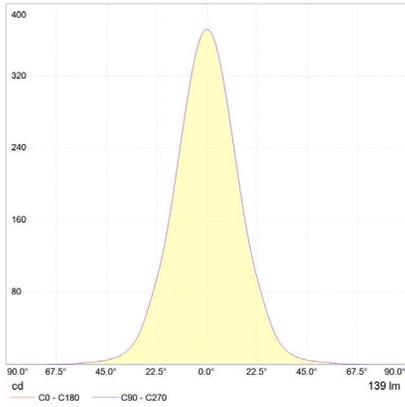

Job Name/Date:

Fixture Type Designation: