


C1-mini-E is an LED spotlight for installation in display cases, suitable for showcase lighting in museum and retail settings. It is 360° rotatable, 125° swivelling with screw base or magnetic base. It is available with a variety of optics, 5 color temperatures and 2 standard finishes.

TECHNICAL DATA


Wattage / Input	2.2W (600mA)
Power Supply	Remote, not included. See page 3.
Dimming	Dimming by Remote Driver - See page 3 (Not Suitable for Dimming Pen)
Construction	Body: Anodized Aluminum
CCT	2700K, 3000K, 3500K, 4000K, 5700K
CRI	>90
Delivered Lumens	140 lm (3000K, 30°)
Efficacy	63 lm/W (3000K, 30°)
Optics	8 Standard 15° Glass Lens – Aspherical w/ Light Diffusion Foil
Finishes	2 Standard, See Below
Fixture Dimensions	Ø0.65" x 1.85" h (magnetic base) Ø0.65" x 2.01" h (screw base)
Lumen Maintenance	L80,B10 >50,000hrs
IP Rating	IP20




Fixture Dimensions



magnetic base



screw base

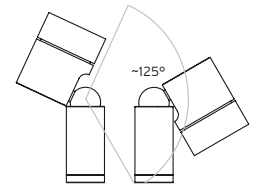

ORDERING INFORMATION

Example: C1-MINI-E-22-40-18-SW-S. Accessories / Power Supplies ordered separately.

C1-MINI-E	-	22	-		-		-	
Model No.	Wattage	CCT	Optics	Finish	Base			
C1-MINI-E (A400004)	22 - 2.2W	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 57 - 5700K	08 - 8° 15 - 15° * 18 - 18° 26 - 26° 30 - 30° 45 - 45° 80 - 80° 47 - 47°+25° 40 - 40°+10°	SW - Anodized Black SI - Silver <u>Custom (min. 10)</u> CH - Champagne HA - Hard Anodized GO - Gold BR - Mocha Bronze RAL - Custom RAL	M - Magnetic S - Screw			

* GLASS LENS – ASPHERICAL WITH LIGHT DIFFUSION FOIL,
SEE ACCESSORIES PAGE

Job Name/Date:

Fixture Type Designation:

ACCESSORIES



Honeycomb Grid
A000601




Anti-Glare Tube
A300003 - ____
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)
BR - mocha bronze (min. 10)
RAL - custom RAL (min. 10)



Inclined Tube
A300146 - ____
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)
BR - mocha bronze (min. 10)



Snoot
A300005 - ____
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)
BR - mocha bronze (min. 10)
RAL - custom RAL (min. 10)



***15° Glass Lens**
A000500-S
Aspherical with Light Diffusion Foil
and Lens Holder






Barn Door
A300007 - ____
SI - silver
SW - black
RAL - custom RAL (min. 10)



Zoom Optic (9°-33°)
A300138 - ____
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)
BR - mocha bronze (min. 10)

PHOTOMETRIC DATA

for light color 3,000 K | standard lens 30° | color rendering index typ. 97, R9 > 90, R12 > 90 | color variation ≤ 3 SDCM

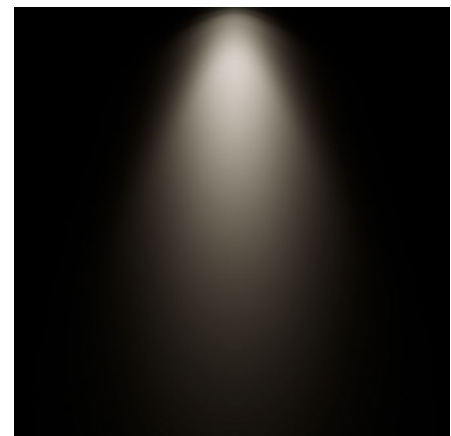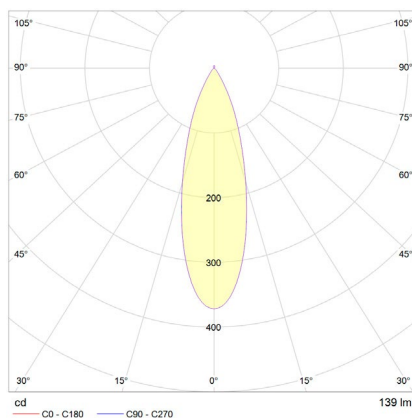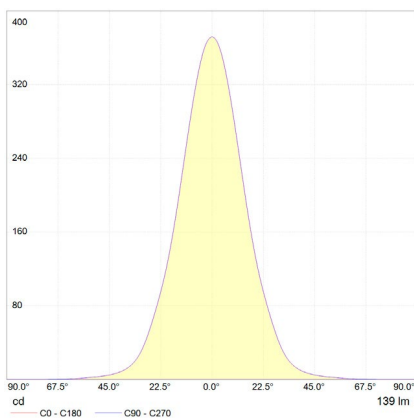

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

600mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 600mA, 10W, Class 2, DAMP	1-4
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 600mA, 20W, Class 2, DAMP	1-9
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 600mA, 30W, Class 2, DAMP	1-13
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 600mA, 50W, Class 2, DAMP	1-16
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 600mA, 100W, Class 2, DAMP	1-11 (1-44)

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation: