

C1-MINI-LC-VL

C1-mini-LC-VL is an LED spotlight for installation on magnetic track, suitable for showcase lighting in museum and retail settings. It is 360° rotatable, 135° swivelling, has attachment with mounting flange and is available with a variety of optics, 5 color temperatures and 2 standard finishes.




TECHNICAL DATA

Wattage / Input	1W (12VDC)
Power Supply	Remote - See Magnetic Track Sheet
Dimming	Individual Dimming Not Available. See page 3 for Remote Dimming Drivers.
Construction	Body: Anodized Aluminum
CCT	2700K, 3000K, 3500K, 4000K, 5700K
CRI	>90
Delivered Lumens	60 lm (3000K, 30°)
Efficacy	60 lm/W (3000K, 30°)
Optics	7 Standard, See Below 8° or 15° Glass Lens - Aspherical w/ Diffusion Foil (See Accessories page)
Finishes	2 Standard, See Below Custom RAL
Fixture Dimensions	Ø0.55" x 0.71" (head) Ø0.39" (stem width) 7.87" (standard pole height)
Lumen Maintenance	L80, B10 >50,000hrs
IP Rating	IP20

NOTE: Track to be ordered separately

Fixture Dimensions

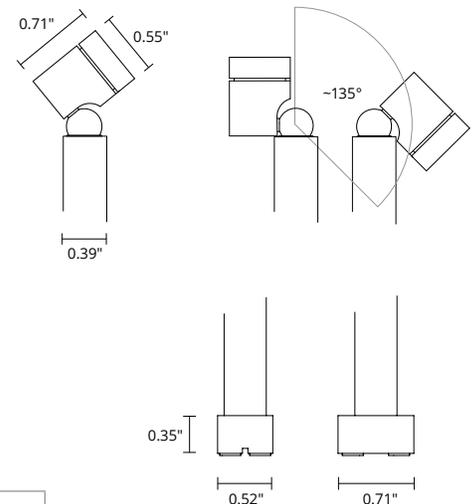

ORDERING INFORMATION

Example: C1-MINI-LC-VL-10-40-18-GO. Accessories / Power Supplies ordered separately.

C1-MINI-LC-VL	-	10	-		-		-	
---------------	---	----	---	--	---	--	---	--

Model No.	Wattage	CCT	Optics	Finish
C1-MINI-LC-VL (A400010)	10 - 1W	27 - 2700K	18 - 18°	SW - Anodized Black
		30 - 3000K	26 - 26°	SI - Silver
		35 - 3500K	30 - 30°	Custom (min. 10)
		40 - 4000K	45 - 45°	CH - Champagne
		57 - 5700K	80 - 80°	HA - Hard Anodized
			47 - 47°+25°	GO - Gold
			40 - 40°+10°	BR - Mocha Bronze
				RAL - Custom RAL


Job Name/Date:

Fixture Type Designation:

ACCESSORIES - OPTIONAL



Honeycomb Grid
A000600



***15° Glass Lens**
A000500-S
Aspherical with Light Diffusion Foil
and Lens Holder

For 8° Optic
Use 15° Glass Lens (A000500-S)
and Snoot (A300005)



Anti-Glare Tube
A300016 - __
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)
BR - mocha bronze (min. 10)
RAL - custom RAL (min. 10)



Inclined Tube
A300019 - __
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)
BR - mocha bronze (min. 10)





Barn Door
A300020 - __
SI - silver
SW - black
RAL - custom RAL (min. 10)

**See separate sheet
for Magnetic Track.
Consult factory for
Remote Power
Supply for Magnetic
Track.**

PHOTOMETRIC DATA

for light color ~3,000 K | standard lens 30° | color rendering index typ. 97, R9 > 90, R12 > 90 | color variation ≤ 3 SDCM

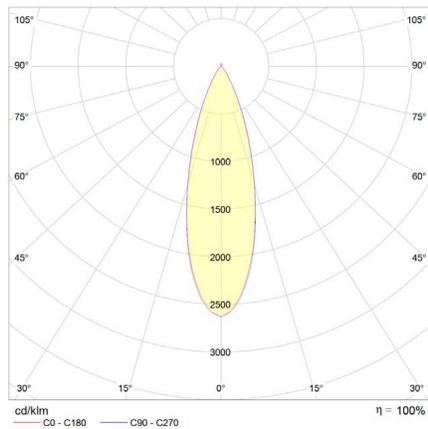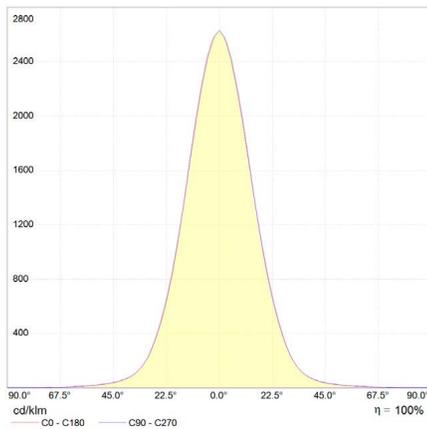

Job Name/Date:

Fixture Type Designation: