

C1-MINI-LC-VL


C1-mini-LC-VL is an LED spotlight for installation on magnetic track, suitable for showcase lighting in museum and retail settings. It is 360° rotatable, 135° swivelling, has attachment with mounting flange and is available with a variety of optics, 5 color temperatures and 3 standard finishes.



TECHNICAL DATA

| | |
|---------------------------|--|
| Wattage / Input | 1W (12VDC) |
| Power Supply | Remote - See Magnetic Track Sheet |
| Dimming | Individual Dimming Not Available. See page 3 for Remote Dimming Drivers. |
| Construction | Body: Anodized Aluminum |
| CCT | 2700K, 3000K, 3500K, 4000K, 5700K |
| CRI | >90 |
| Delivered Lumens | 60 lm (3000K, 30°) |
| Efficacy | 60 lm/W (3000K, 30°) |
| Optics | 7 Standard 15° Glass Lens – Aspherical w/ Light Diffusion Foil |
| Finishes | 3 Standard, See Below |
| Fixture Dimensions | Ø0.55" x 0.71" (head) Ø0.39" (stem width) 7.87" (standard pole height) |
| Lumen Maintenance | L80,B10 >50,000hrs |
| IP Rating | IP20 |

Fixture Dimensions

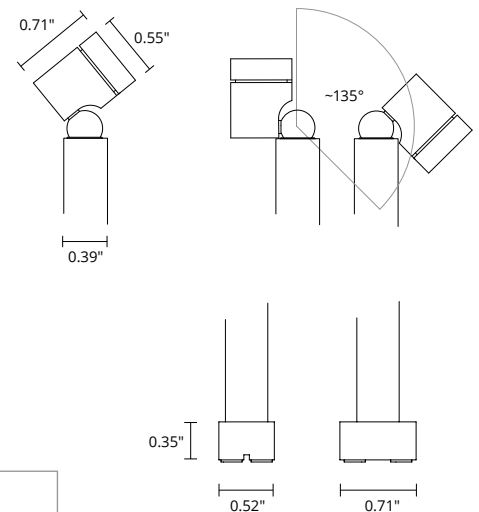

NOTE: Track to be ordered separately

ORDERING INFORMATION

Example: C1-MINI-LC-VL-10-40-18-G. Accessories / Power Supplies ordered separately.

| | | | | | | | | |
|---------------|---|----|---|--|---|--|---|--|
| C1-MINI-LC-VL | - | 10 | - | | - | | - | |
|---------------|---|----|---|--|---|--|---|--|

| Model No. | Wattage | CCT | Optics | Finish |
|---------------|---------|--------------|--------------|---------------------------|
| C1-MINI-LC-VL | 10 - 1W | 27 - 2700K | 15 - 15° * | B - Anodized Black |
| | | 30 - 3000K | 18 - 18° | S - Silver |
| | | 35 - 3500K | 26 - 26° | G - Gold |
| | | 40 - 4000K | 30 - 30° | C - Custom RAL |
| | | 57 - 5700K | 45 - 45° | (consult factory for "C") |
| | | | 80 - 80° | |
| | | | 47 - 47°+25° | |
| | | 40 - 40°+10° | | |

* GLASS LENS – ASPHERICAL WITH LIGHT DIFFUSION FOIL, SEE ACCESSORIES PAGE


Job Name/Date:

Fixture Type Designation:

ACCESSORIES - OPTIONAL



Honeycomb Grid
A000600



***15° Glass Lens - Aspherical**
with Light Diffusion Foil



Anti-Glare Tube
A300016 - ___
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)
RAL - custom RAL



Inclined Tube
A300019 - ___
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)






Barn Door
A300020 - ___
SI - silver
SW - black
RAL - custom RAL

**See separate sheet
for Magnetic Track.
Consult factory for
Remote Power
Supply for Magnetic
Track.**

PHOTOMETRIC DATA

for light color ~3,000K | standard lens 30° | color rendering index typ. 97, R9 > 90, R12 > 90 | color variation ≤ 3 SDCM

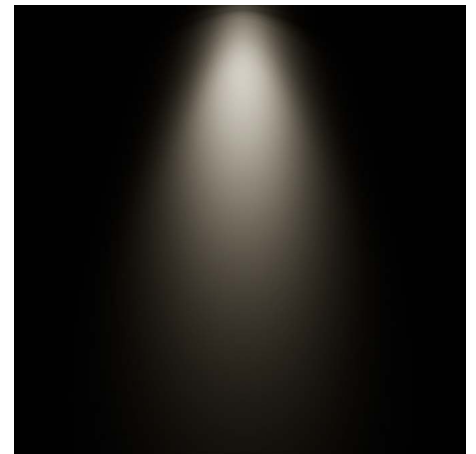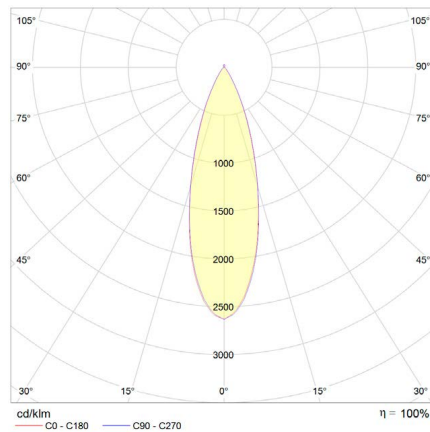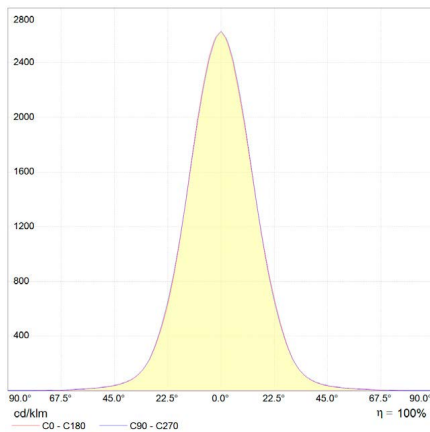

Job Name/Date:

Fixture Type Designation: